
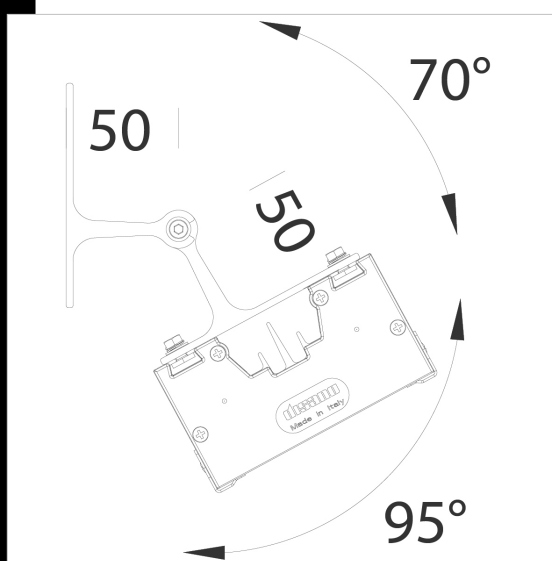


591 étrier orientable

En aluminium extrudé. Pour la suspension et la rotation. Sachet de 2 pièces.

Download
DXF 2D
- 591.dxf

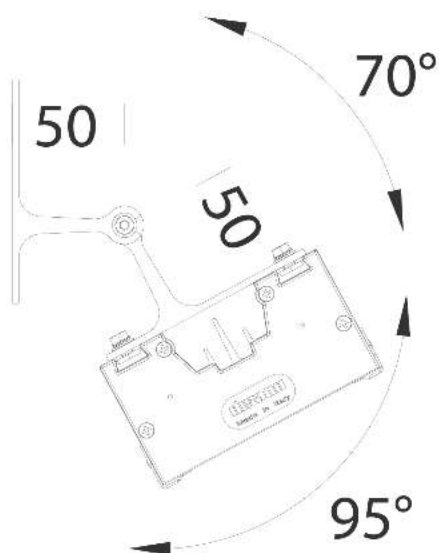

Code	Kg	WTot	Colour
998190-00	0,28	0 W	GRAPHITE
998191-00	0,27	0 W	GREY

Prodotti



- 2162 Radon HE - extensif -



- 2163 Radon HP - ellipitique -



- 2164 Radon HE - ellipitique -



- 2165 Radon HP - extensif -



- 2166 Radon HE - extensif - UGR<25



- 2167 Radon - extensif



- 2160 Radon - HORTI - 4 channels (Deep Blue-White CRI70 4000K-Hyper Red-Far Red)



- 2160 Radon - HORTI - 2 channels (Deep blue-Hyper Red)

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated