# 1SET310441R0000 - ACTIVE

#### ENTRELEC | M12 Connector

TE Internal #: 1SET310441R0000 Standard Circular Connectors, Wire-to-Wire, 4 Position, Sealable, Wire & Cable, Signal, Nickel, Copper Alloy, A Polarization Code, M12 Connector

#### View on TE.com >

#### Connectors > Circular Connectors > Standard Circular Connectors



Connector System: Wire-to-Wire

Number of Positions: 4

Sealable: Yes

Connector & Contact Terminates To: Wire & Cable

Contact Current Rating (Max): 4A

# Features



## Product Type Features

Prewired	No
Product Type	Connector Assembly
Accessory Color	Black
Assembly Type	Electrical Connector
Connector System	Wire-to-Wire
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Circular Connector Type	Receptacle
Shell Type	Metal
Configuration Features	
Keying & Polarized Position Locations	A
Factory Installed Backshell	With
Keying	A
Number of Positions	4

Standard Circular Connectors, Wire-to-Wire, 4 Position, Sealable, Wire & Cable, Signal, Nickel, Copper Alloy, A Polarization Code, M12 Connector



Number of Power Positions	0
Number of Signal Positions	4
Contacts Preloaded	Yes
Electrical Characteristics	
Operating Voltage	250 VAC
Voltage	250 Vrms
Body Features	
Peripheral Seal Material	Silicone
Environmental Protection	IP67
O-Ring Material	Silicone
Environmental Protection Type	Elastomer Sealed
Shell Plating Material	Nickel
Shell Base Material	Copper Alloy
Circular Connector Insulation Material Type	Polyamide 66 GF25
Contact Features	
Contact Current Rating (Max)	4 A
Reverse Gender	No
Circular Connector Contact Type	Socket
Mechanical Attachment	
Mating Retention Type	Threaded Coupling
Mating Alignment	With
Polarization Code	A
Mating Alignment Type	Keyed
Housing Features	
Circular Connector Shell Size	20
Dimensions	
Wire Size	.82 – .2 mm²
Usage Conditions	
IP Dust Sealing Level	6
IP Water Sealing Level	IP67
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
Operation/Application	

**C** For support call+1 800 522 6752

Standard Circular Connectors, Wire-to-Wire, 4 Position, Sealable, Wire & Cable, Signal, Nickel, Copper Alloy, A Polarization Code, M12 Connector



Durability Rating	100 Cycles
Circuit Application	Signal
Shielded	Yes
Industry Standards	
UL Flammability Rating	UL 94HB
Other	
Position Locations Omitted	0
Field Serviceable	Yes
<b>Product Compliance</b> For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) SVHC > Threshold:

#### Halogen Content

#### Solder Process Capability

### Pb (4% in Component Part)

#### Article Safe Usage Statements:

Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.

Not reviewed for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


# **Compatible Parts**

Standard Circular Connectors, Wire-to-Wire, 4 Position, Sealable, Wire & Cable, Signal, Nickel, Copper Alloy, A Polarization Code, M12 Connector





# Also in the Series | M12 Connector

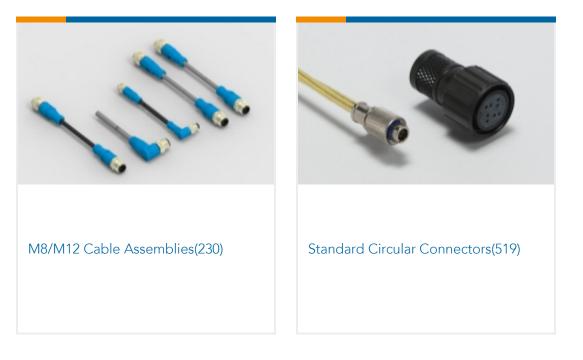

# Documents

Product Drawings M12-FR-4CON-PG7-SHU

English

**CAD** Files

#### 3D PDF

3D

**Customer View Model** 

## ENG\_CVM\_CVM\_1SET310441R0000\_A.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_1SET310441R0000\_A.3d\_igs.zip

English

Customer View Model ENG\_CVM\_CVM\_1SET310441R0000\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

Infographic - entrelec ews-linecard

English

Catalog - ENTRELEC-M8-M12-RJ45

English

**Product Specifications** 

**C** For support call+1 800 522 6752

Standard Circular Connectors, Wire-to-Wire, 4 Position, Sealable, Wire & Cable, Signal, Nickel, Copper Alloy, A Polarization Code, M12 Connector



Application Specification

English