



2

1


PANDUIT P/N	WEIGHT
P36B43M	6.9kg

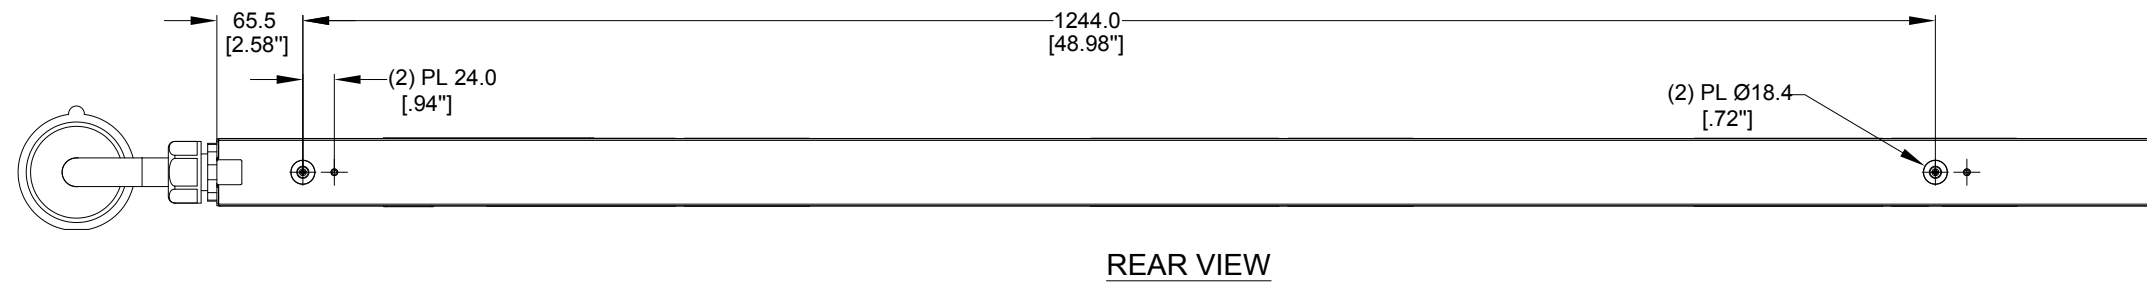

REAR VIEW

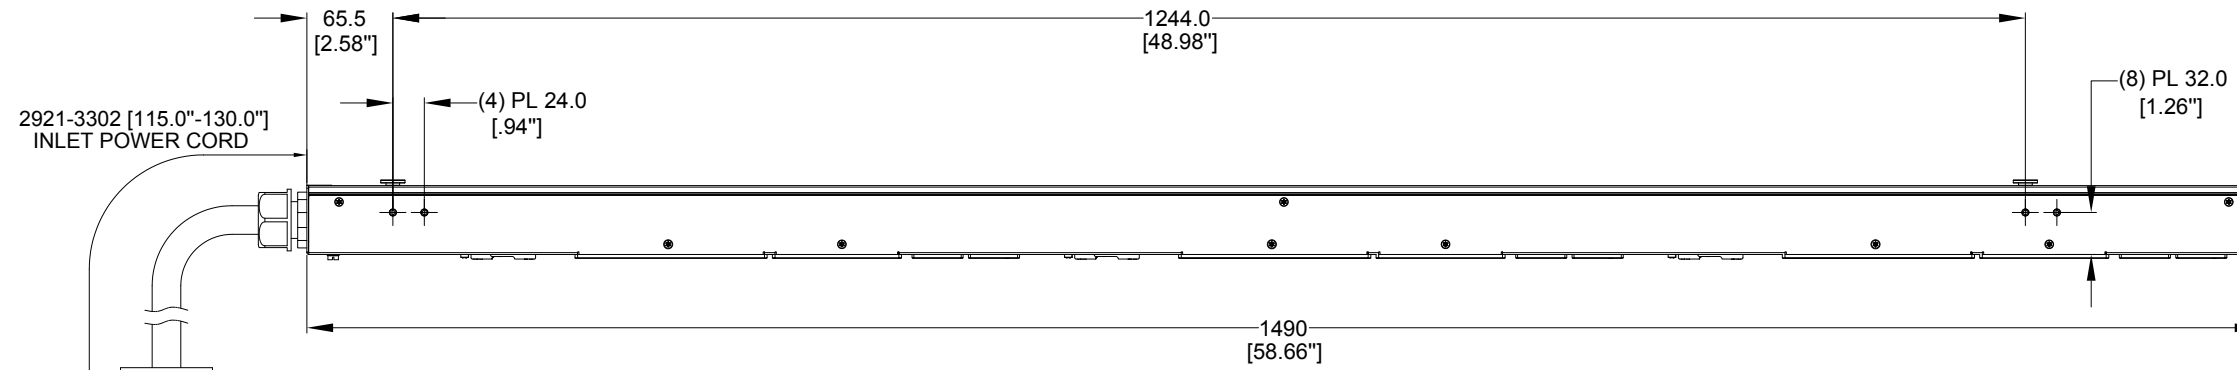


TOP VIEW

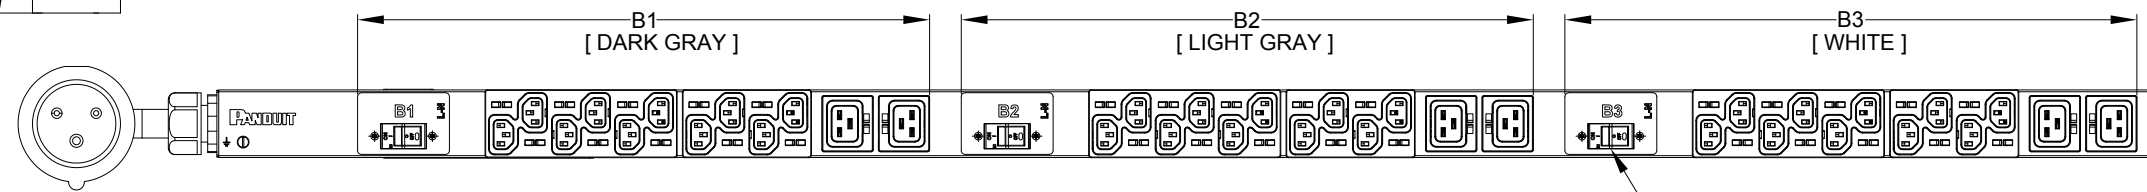

FRONT VIEW

NOTES:

- IDENTIFICATION:
 - UNIT TYPE: BASIC
 - ORIENTATION: VERTICAL, MID
 - OUTLET QTY&TYPE: (30)C13, (6)C19
 - BREAKER QTY&TYPE: (3) 16A, SINGLE-POLE
 - INPUT VOLTAGE: 200-240VAC
 - INPUT CURRENT: 48A
 - INPUT PHASE: SINGLE PHASE
 - RATED POWER: 11.0kVA
 - INPUT PLUG: IEC 60309 2P+E 6H 63A
 - INPUT CORD LENGTH: 3m [10']
- ACCESSORIES:
 - POCKET GUIDE
- RoHS COMPLIANT
- VISIT PANDUIT'S ON-LINE CATALOG AT WWW.PANDUIT.COM FOR ADDITIONAL PRODUCT INFORMATION CONTAINED IN THE SPECIFICATION SHEET AS WELL AS A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
- MAXIMUM ALLOWABLE INPUT POWER = 11.0kW
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES

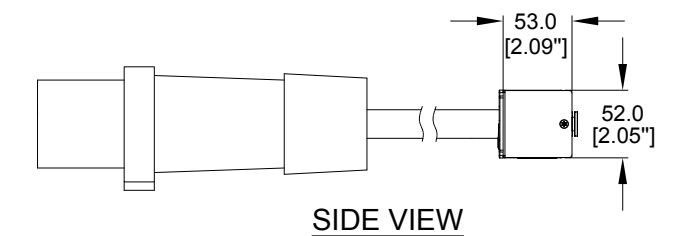

SIDE VIEW

B

B

A

A

PLUG
63 AMP, 250V
2P/3W
IEC 60309, SPLASHPROOF IP44
3L(S); 3V(W), 6H

**SIX (6)
RECEPTACLES**
16 AMP, 250V
STRAIGHT BLADE
IEC 60320 / C19

**THIRTY (30)
RECEPTACLES**
10 AMP, 250V
STRAIGHT BLADE
IEC 60320 / C13

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
01B	08/21/2017	DI.ZHAI	MIM	EDM	REVISED TOLERANCES	P36B43M
01A	06/28/2017	DI.ZHAI	MIM	EDM	INITIAL RELEASE	P36B43M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY

SIGN _____
DATE _____
PRINT _____

TITLE: BASIC SERIES PDU
P36B43M
CUSTOMER DRAWING

ITEM REVISION NAME: _____

DATASHEET FILE NAME: _____

UNLESS OTHERWISE SPECIFIED
DIMENSIONAL TOLERANCE ARE: mm [IN]

Tolerance(mm)
04<L<50 ±0.5
50<L<250 ±1.0
250<L<500 ±1.5
500<L<1000 ±2.5
1000<L<2000 ±4.0

THIRD ANGLE PROJECTION

MATERIAL/COLOR: N/A

DRAWING NUMBER: P36B43M_DC

DRAWN BY: DI.ZHAI | DATE: 05/24/2017 | CHK: SEAN | SCALE: NONE

SHT 1 OF 1 | SCALE: B

2

1