


Part number

PEW 6365 PV



Mobile socket outlet, PLUSO series, 3 poles + N + PE, 6 h (red), 63 A, 380 ÷ 415 V

Product description		Material properties	
Product type	Socket Mobile	Colour	RAL 7035 grey, RAL 3000 red
Series	PEW...PV, PLUSO	RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
Connection type	Screw terminal connection	China RoHs - EFUP	50
N. of poles	3 poles + N + 	REACH SVHC substances	Yes Lead
Clock position	6	SCIP number	Ca7de37f-add8-4b77-9861-279c94903ade
Technical data		Approvals / Standards	
Current	63 A	Reference standard	EN 60309-1 and -2
Voltage	380 ÷ 415 V	General ordering information	
IP degree of protection	IP67	EAN13 code	8015747077651
Further technical details		Packaging Information	
Weight	959,00 g	Packaging length	300,00 mm
Operating temperature range (min, max)	-25°C ... +40°C	Packaging height	130,00 mm
		Packaging width	200,00 mm
		Packaging weight	2,10 kg
		Packaging volume	7,80 dm ³
		Packaging description	Carton box
		Packaging quantity	2 Pcs
		Packaging EAN code	8015747077668


Part number

PEW 6365 PV



Catalogue drawings

(63 / 125A) PEW ... PV

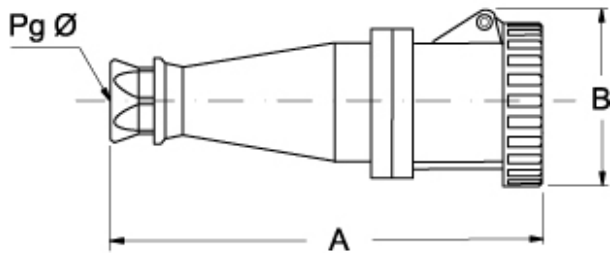

PEW ... PV		A	B	Pg Ø
63A	2P+⊕	277	108,5	36
	3P+⊕	277	108,5	36
	3P+N+⊕	277	108,5	36
125A	2P+⊕	324	120,5	2" gas
	3P+⊕	324	120,5	2" gas
	3P+N+⊕	324	120,5	2" gas

Notes

Dimensions shown in mm are not binding and may be changed without notice.

- Compliant with EN 60309-1 and -2
- Enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material
- PE...PV types 16A and 32A (IP44), RAL 7035 grey enclosure, spring lid colour coded according to the operating voltage, entry with cable gland
- PEW...PV types 16A, 32A, 63A and 125A (IP66/IP67), RAL 7035 grey enclosure, spring lid with locking ring and gasket
- PEW...PV types 63A and 125A (IP67), cable anchoring collar incorporated in the insert
- Terminals with retained screws
- 63A, 125A: with pilot contact
- Nickel-plated contacts standard on 63A and 125A (on 16A and 32A only version PHW...PV)