
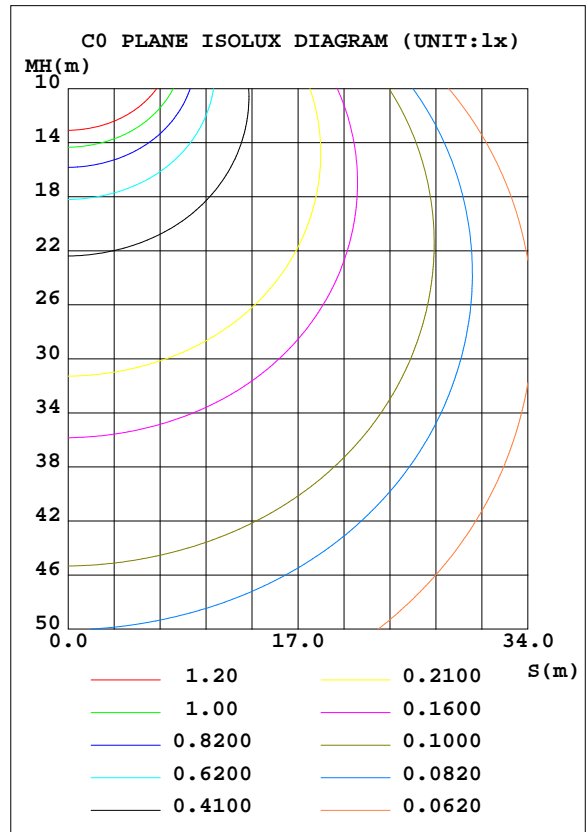


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.0V I:0.1090A P:13.19W PF:0.5261 Freq:50.01Hz Lamp Flux:1624.02x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:A1521ST 14.5W 40K	DIM.:	SERIAL No.:A1901415B001
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 123.11 lm/W			
MODEL		I _{max} (cd)	213.1	S/MH(C0/180)	1.58
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	1.54
RATED VOLTAGE(V)		TOTAL FLUX(lm)	1624.0	η UP, DN(C0-180)	14.4, 35.5
NOMINAL FLUX(lm)	1624.02	CIE CLASS	SEMI-D.	η UP, DN(C180-360)	14.8, 35.3
LAMPS INSIDE	1	η up(%)	29.2	CIBSE SHR NOM	1.75
TEST VOLTAGE(V)		η down(%)	70.8	CIBSE SHR MAX	1.75

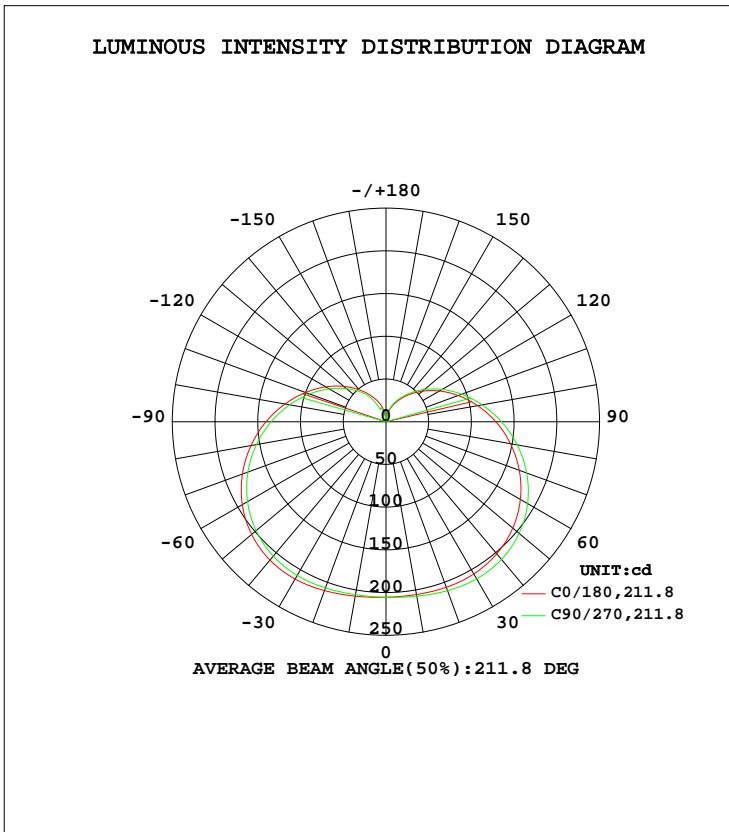

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.6DEG
 Operators:LWQ
 Test Date:2019-01-29

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.363T
 Humidity:37%
 Test Distance:1.509m [K=1.0000]
 Remarks: