

VSPM-6B2413 Universal Robots Kit

Inspector



2D MACHINE VISION

2D MACHINE VISION



Ordering information

Туре	Part no.
VSPM-6B2413 Universal Robots Kit	1097255

Included in delivery: Mounting plate (1), Inspector Flex visible block filter (1), SSL-2J04-G05MR (1), USB stick PIM60 (1), VSPM-6B2413 (1), YF2A8B-050XXXLEBX (1), OBJ-B04320BA (1), OBJ-B06025BA (1)

Other models and accessories -> www.sick.com/Inspector

$C \in ERE$

Detailed technical data

Features

Quality check Measuring, 2D Position determinationTechnology2D snapshotProduct categoryConfigurable		
Product category Configurable Toolkit Object locator Pixel counter Edge pixel counter Pattern Blob Finder Polygon Edge Circle	Task	Quality check Measuring, 2D
Toolkit Object locator Pixel counter Edge pixel counter Pattern Blob Finder Polygon Edge Circle	Technology	2D snapshot
Pixel counter Edge pixel counter Pattern Blob Finder Polygon Edge Circle	Product category	Configurable
Angle Edge counter Find maximum	Toolkit	Pixel counter Edge pixel counter Pattern Blob Finder Polygon Edge Circle Distance Angle Edge counter
Sensor CMOS matrix sensor, grayscale values	Sensor	CMOS matrix sensor, grayscale values
Optical focus Adjustable focus (manually)	Optical focus	Adjustable focus (manually)
Calibration Perspective and lens distortion correction, mm results	Calibration	Perspective and lens distortion correction, mm results
Robot coordinate alignment 🗸	Robot coordinate alignment	✓
Working distance ≥ 50 mm	Working distance	≥ 50 mm
LED class Risk group 1 (low risk, IEC62471: 2006)	LED class	Risk group 1 (low risk, IEC62471 : 2006)
Offline support Emulator	Offline support	Emulator
Lens S-mount	Lens	S-mount
Optical format 1/3"	Optical format	1/3"

Mechanics/electronics

Connection type	M12, 12-pin male connector M12, 4-pin female connector
Supply voltage	24 V DC, ± 20 %

¹⁾ With front window mounted.

Ripple	< 5 V _{pp}
Current consumption	< 450 mA, without output load
Enclosure rating	IP67 ¹⁾
Housing material	Aluminum
Dimensions (L x W x H)	100 mm x 53 mm x 38 mm

 $^{\mbox{1})}$ With front window mounted.

Performance

Sensor resolution	640 px x 480 px
Scan/frame rate	40 fps ¹⁾
Number of inspections	64
Reference images	32 objects

¹⁾ Max. 200 fps.

Interfaces

Ethernet	✓, TCP/IP
Data transmission	rate 100 Mbit/s
EtherNet/IP™	1
Data transmission	rate 100 Mbit/s
Operator interfaces	Web server
Configuration software	SOPAS ET
Data storage and retrieval	Log for 30 images, record images on PC, store images to FTP
Ethernet communication	Web API
Digital input	4 inputs (24 V)
Configurable inputs	External trigger, encoder input, External teach, reference object selection
Digital output	3 digital outputs, 24 V (B-type)
Configurable outputs	Output by logical expressions, Additional image storage possibility via FTP
Output current	≤ 100 mA
Standard outputs	No object detected, Everything OK, Detail error
Maximum encoder frequency	40 kHz
External illumination	5 V TTL
I/O box extension	5 x inputs for object selection, 16 outputs
Ambient data	

Ambient data

Shock load	EN 60068-2-27
Vibration load	IEC 60068-2-6
Ambient operating temperature	0 °C +45 °C ¹⁾
Storage temperature	-20 °C +70 °C ¹⁾

$^{(1)}$ Relative humidity: 35% ... 85%, 95% in storage.

Classifications


ECLASS 5.0	27310205
ECLASS 5.1.4	27310205

2D MACHINE VISION

ECLASS 6.0	27310205
ECLASS 6.2	27310205
ECLASS 7.0	27310205
ECLASS 8.0	27310205
ECLASS 8.1	27310205
ECLASS 9.0	27310205
ECLASS 10.0	27310205
ECLASS 11.0	27310205
ECLASS 12.0	27310205
ETIM 5.0	EC001820
ETIM 6.0	EC001820
ETIM 7.0	EC001820
ETIM 8.0	EC001820
UNSPSC 16.0901	43211731

Dimensional drawing (Dimensions in mm (inch))


Standard

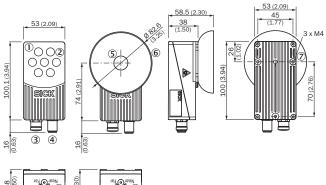




- ① Front screen: standard, flex
- ② Ring lighting
- ③ Ethernet connection M12, 4-pin, female
- 0 Power connection M12, 12-pin, male
- 5 Front screen: dome
- 6 Dome light
- O Mounting hole M4
- ⑧ Focus

Field of view

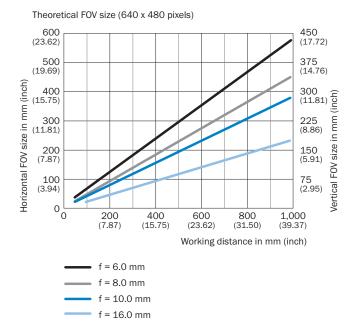

Connection type




Ethernet connection M12, 4-pin, female
 Power connection M12, 12-pin, male

2D MACHINE VISION

Connection diagram

M12 connection diagram, 12-pin

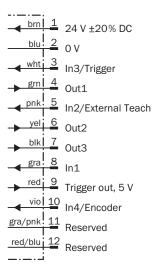

Ethernet connection diagram



Recommended services

Additional services -> www.sick.com/Inspector

	Туре	Part no.
Commissioning		
 Product area: 2D machine vision Range of services: Inspection of connection, fine adjustment, optimization of parameters of SICK product as well as tests, set-up of previously defined functions of image settings, object locator, detailed inspections, output settings and results Travel expenses: The prices do not include travel costs such as hotel, flight, travel time and expenses. Duration: Additional work will be invoiced separately 	Inspector commissioning	1612238
Maintenance		
 Product area: 2D machine vision Range of services: Inspection, analysis and restoring of defined functions, set-up of previously defined functions of image settings, object locator, detailed inspections, output settings and results Duration: Additional work will be invoiced separately Travel expenses: The prices do not include travel costs such as hotel, flight, travel time and expenses. 	Inspector maintenance	1612242

VSPM-6B2413 Universal Robots Kit | Inspector 2D MACHINE VISION

	Туре	Part no.
Extended warranty		
 Product area: Identification solutions, machine vision, Detection and ranging solutions, safety camera sensors, Safety laser scanners, Safety radar sensors Range of services: The services correspond to the scope of the statutory manufacturer warranty (SICK general terms of delivery). Duration: Five-year warranty from delivery date. 	Extended warranty for a total of five years from delivery date	1680671

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

WORLDWIDE PRESENCE:

Contacts and other locations -www.sick.com



Online data sheet

