RIGID SM1 BREAKER-CONTACTOR CONNECTION. FOR MOTOR PROTECTION BREAKER SM1R... WITH BG...MINI-CONTACTORS



Product designation

Product type designation

Description

Rigid SM1 breaker-contactor connections SM1X Rigid SM1R breaker - BG contactor connections. SM1R...

Accessories for

Operational characteristics


IEC maximum current (Imax) A 12

Mechanical features

Operating position

Weight g 19
Dimensions

(1.76")

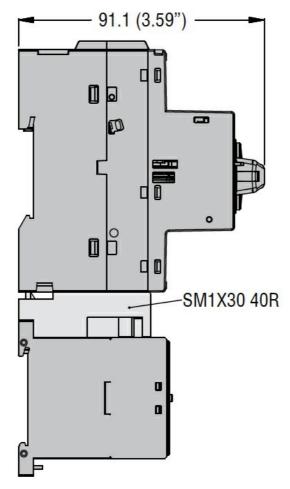

Certifications and compliance

Compliance



ENERGY AND AUTOMATION

SM1X3040R

RIGID SM1 BREAKER-CONTACTOR CONNECTION. FOR MOTOR PROTECTION BREAKER SM1R... WITH BG...MINI-CONTACTORS

	CSA C22.2 n° 14
	IEC/EN 60947-1
	IEC/EN 60947-5-1
	UL508
Certificates	
	cULus
	EAC

ETIM classification