

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
P42D42M-XXYZ	SEE SHEET 2

SPECIFICATION:

1. STANDARD:	
UNIT TYPE:	MONITORED INPUT
ORIENTATION:	VERTICAL, 0U FULL
OUTLET QTY&TYPE:	(36) C13, (6) C19
INPUT VOLTAGE:	200-240/346-415VAC
INPUT CURRENT:	16A
BREAKER QTY&TYPE:	N/A
INPUT PHASE:	THREE-PHASE WYE
RATED POWER:	11.0kVA
INPUT PLUG:	IEC 60309 3P+N+E 6H 16A
INPUT POWER CORD:	SEE SHEET 2 FOR PART NUMBER TABLE
REGULATORY STANDARD:	RoHS COMPLIANT

2. ADDITIONAL:

NONE

3. ACCESSORIES:


(1) QUICK-START GUIDE

NOTES:


- PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES]
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
- FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL
- DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

IDENTIFICATION


FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: P42D42M-XX Y Z

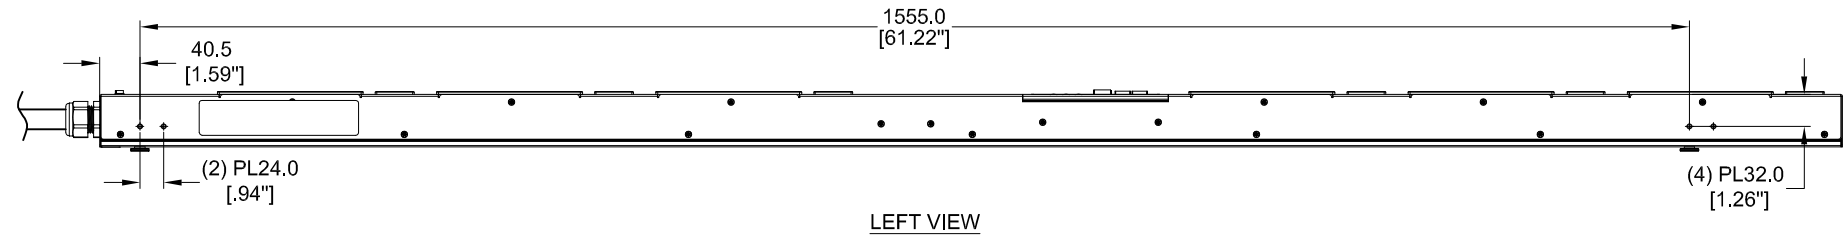


LEFT VIEW

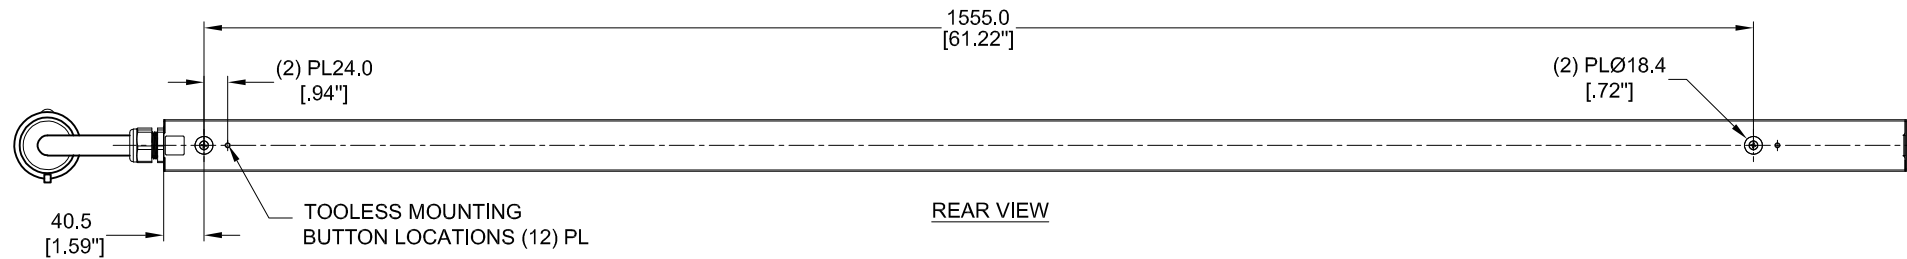


REAR VIEW

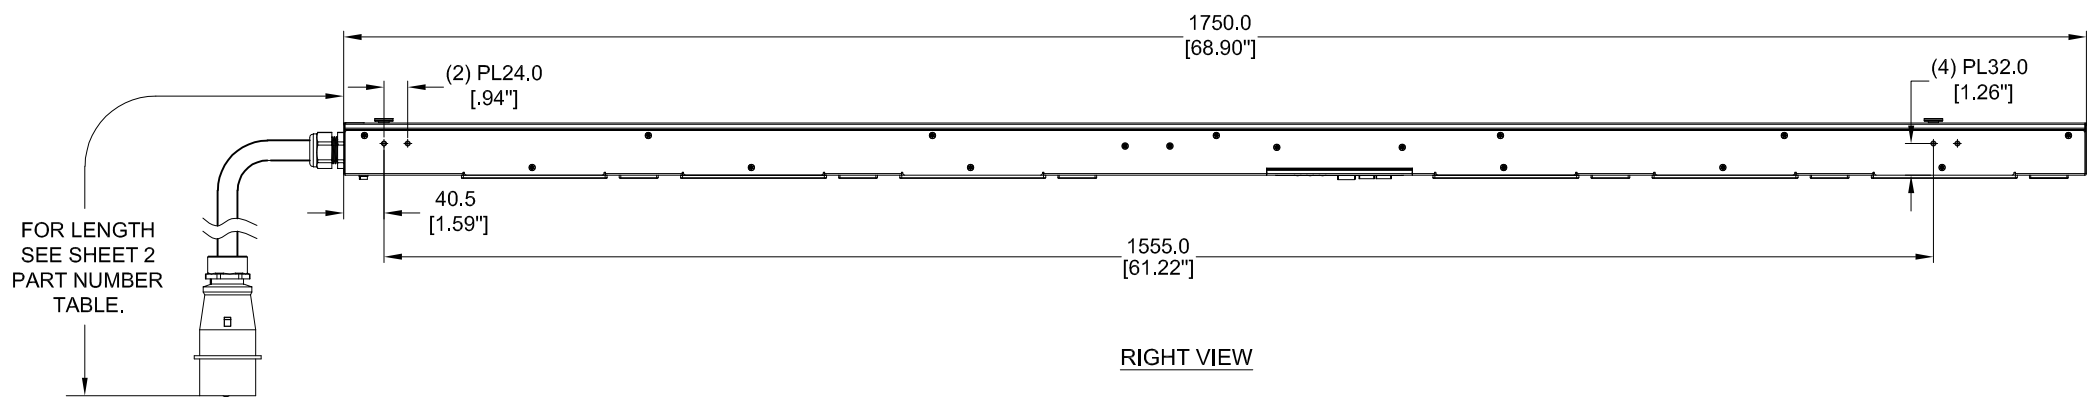

RIGHT VIEW

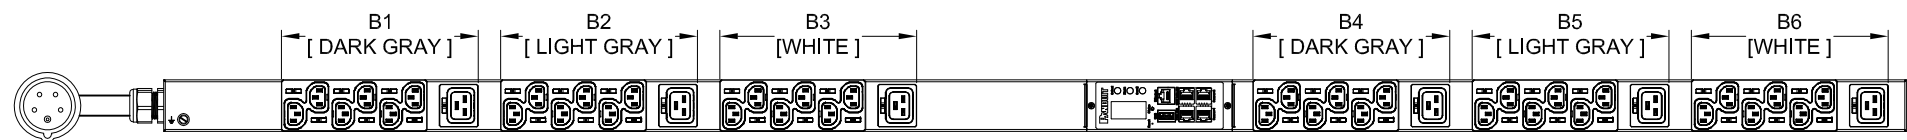

FRONT VIEW



BOTTOM VIEW

XX: FINISHED GOOD COLOR BL =BLACK YL =YELLOW RD =RED BU =BLUE WH =WHITE GN =GREEN	Y: INPUT FEED TYPE 1 =TOP-END FED 2 =BOTTOM-END FED	Z: INPUT CORD LENGTH A =1 METER B =2 METER C =3 METER
--	---	--

PLUG/RECEPTACLE BLOCK



PLUG
IEC 60309, 4P 5W, 6H
IP44 (SPASHPROOF)
16A, 346-415V MAX RATED INPUT



RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT



RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION 'DE-CODER'	P42D42M
01A	07/13/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P42D42M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY.		SIGN
		DATE
		PRINT
TITLE INTELLIGENT SERIES PDU P42D42M-XXYZ CUSTOMER DRAWING		
ITEM REVISION NAME:		
DATASHEET FILE NAME:		
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR:
Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		N/A
THIRD ANGLE PROJECTION		DRAWING NUMBER: P42D42M_DC
DRAWN BY GEORGE	DATE 06/27/2017	SCALE NONE
CHK SEAN	SHT 1 OF 2	
		SCALE B

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P42D42M	VERTICAL,(36) C13,(6) C19,MONITORED INPUT, 200-240/346-415V/16A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM/-127MM) 10' [+10"/-5"]	5.7kg
P42D42M-BL1A	VERTICAL,(36) C13,(6) C19,MONITORED INPUT, 200-240/346-415V/16A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	5.3kg
P42D42M-BL1B	VERTICAL,(36) C13,(6) C19,MONITORED INPUT, 200-240/346-415V/16A/3 PHASE WYE , TOP-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	5.5kg
P42D42M-RD1A	VERTICAL,(36) C13,(6) C19,MONITORED INPUT, 200-240/346-415V/16A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	5.3kg
P42D42M-RD1B	VERTICAL,(36) C13,(6) C19,MONITORED INPUT, 200-240/346-415V/16A/3 PHASE WYE , TOP-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	5.5kg
P42D42M-RD1C	VERTICAL,(36) C13,(6) C19,MONITORED INPUT, 200-240/346-415V/16A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM/-127MM) 10' [+10"/-5"]	5.7kg
P42D42M-WH1A	VERTICAL,(36) C13,(6) C19,MONITORED INPUT, 200-240/346-415V/16A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	5.3kg
P42D42M-WH1B	VERTICAL,(36) C13,(6) C19,MONITORED INPUT, 200-240/346-415V/16A/3 PHASE WYE , TOP-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	5.5kg
P42D42M-WH1C	VERTICAL,(36) C13,(6) C19,MONITORED INPUT, 200-240/346-415V/16A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM/-127MM) 10' [+10"/-5"]	5.7kg
P42D42M-YL1A	VERTICAL,(36) C13,(6) C19,MONITORED INPUT, 200-240/346-415V/16A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	5.3kg
P42D42M-YL1B	VERTICAL,(36) C13,(6) C19,MONITORED INPUT, 200-240/346-415V/16A/3 PHASE WYE , TOP-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	5.5kg
P42D42M-YL1C	VERTICAL,(36) C13,(6) C19,MONITORED INPUT, 200-240/346-415V/16A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM/-127MM) 10' [+10"/-5"]	5.7kg
P42D42M-BU1A	VERTICAL,(36) C13,(6) C19,MONITORED INPUT, 200-240/346-415V/16A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	5.3kg
P42D42M-BU1B	VERTICAL,(36) C13,(6) C19,MONITORED INPUT, 200-240/346-415V/16A/3 PHASE WYE , TOP-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	5.5kg
P42D42M-BU1C	VERTICAL,(36) C13,(6) C19,MONITORED INPUT, 200-240/346-415V/16A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM/-127MM) 10' [+10"/-5"]	5.7kg
P42D42M-GN1A	VERTICAL,(36) C13,(6) C19,MONITORED INPUT, 200-240/346-415V/16A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	5.3kg
P42D42M-GN1B	VERTICAL,(36) C13,(6) C19,MONITORED INPUT, 200-240/346-415V/16A/3 PHASE WYE , TOP-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	5.5kg
P42D42M-GN1C	VERTICAL,(36) C13,(6) C19,MONITORED INPUT, 200-240/346-415V/16A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM/-127MM) 10' [+10"/-5"]	5.7kg
P42D42M-BL2A	VERTICAL,(36) C13,(6) C19,MONITORED INPUT, 200-240/346-415V/16A/3 PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	5.3kg
P42D42M-BL2B	VERTICAL,(36) C13,(6) C19,MONITORED INPUT, 200-240/346-415V/16A/3 PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	5.5kg
P42D42M-BL2C	VERTICAL,(36) C13,(6) C19,MONITORED INPUT, 200-240/346-415V/16A/3 PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM/-127MM) 10' [+10"/-5"]	5.7kg
P42D42M-RD2A	VERTICAL,(36) C13,(6) C19,MONITORED INPUT, 200-240/346-415V/16A/3 PHASE WYE , BOTTOM-END FED 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	5.3kg
P42D42M-RD2B	VERTICAL,(36) C13,(6) C19,MONITORED INPUT, 200-240/346-415V/16A/3 PHASE WYE , BOTTOM-END FED 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	5.5kg
P42D42M-RD2C	VERTICAL,(36) C13,(6) C19,MONITORED INPUT, 200-240/346-415V/16A/3 PHASE WYE , BOTTOM-END FED 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM/-127MM) 10' [+10"/-5"]	5.7kg
P42D42M-WH2A	VERTICAL,(36) C13,(6) C19,MONITORED INPUT, 200-240/346-415V/16A/3 PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	5.3kg
P42D42M-WH2B	VERTICAL,(36) C13,(6) C19,MONITORED INPUT, 200-240/346-415V/16A/3 PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	5.5kg
P42D42M-WH2C	VERTICAL,(36) C13,(6) C19,MONITORED INPUT, 200-240/346-415V/16A/3 PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM/-127MM) 10' [+10"/-5"]	5.7kg
P42D42M-YL2A	VERTICAL,(36) C13,(6) C19,MONITORED INPUT, 200-240/346-415V/16A/3 PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	5.3kg
P42D42M-YL2B	VERTICAL,(36) C13,(6) C19,MONITORED INPUT, 200-240/346-415V/16A/3 PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	5.5kg
P42D42M-YL2C	VERTICAL,(36) C13,(6) C19,MONITORED INPUT, 200-240/346-415V/16A/3 PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM/-127MM) 10' [+10"/-5"]	5.7kg
P42D42M-BU2A	VERTICAL,(36) C13,(6) C19,MONITORED INPUT, 200-240/346-415V/16A/3 PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	5.3kg
P42D42M-BU2B	VERTICAL,(36) C13,(6) C19,MONITORED INPUT, 200-240/346-415V/16A/3 PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	5.5kg
P42D42M-BU2C	VERTICAL,(36) C13,(6) C19,MONITORED INPUT, 200-240/346-415V/16A/3 PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM/-127MM) 10' [+10"/-5"]	5.7kg
P42D42M-GN2A	VERTICAL,(36) C13,(6) C19,MONITORED INPUT, 200-240/346-415V/16A/3 PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM/-89MM) 3.3' [+3.5"/-1.75"]	5.3kg
P42D42M-GN2B	VERTICAL,(36) C13,(6) C19,MONITORED INPUT, 200-240/346-415V/16A/3 PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM/-89MM) 6.5' [+7"/-3.5"]	5.5kg
P42D42M-GN2C	VERTICAL,(36) C13,(6) C19,MONITORED INPUT, 200-240/346-415V/16A/3 PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM/-127MM) 10' [+10"/-5"]	5.7kg

B

B

A

A

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION 'DE-CODER'	P42D42M
01A	07/13/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P42D42M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY.		SIGN
		DATE
		PRINT
TITLE INTELLIGENT SERIES PDU P42D42M-XYZ CUSTOMER DRAWING		
ITEM REVISION NAME:		
DATASHEET FILE NAME:		
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR: N/A
 THIRD ANGLE PROJECTION		DRAWING NUMBER: P42D42M_DC
DRAWN BY	DATE	SCALE
GEORGE	06/27/2017	NONE
CHK	SCALE	SHT 2 OF 2
SEAN	NONE	B