

## DIGITUS® 483 mm (19") Wall Mounting Cabinets Unique Series - double sectioned, pivoted



✓ 1.1 - 1.5 strong sheet steel
✓ Safety class IP 20
✓ Standard color: Grey (RAL 7035)
✓ Large range of equipment available

#### **Abstract**

DIGITUS® 483 mm (19") Wall Mounting Cabinets Unique Series - double sectioned, pivoted -600 mm, 600 mm depth

### **Features**

- Safety class rating IP20
- Lockable safety-glass door with steel frame
- 210° door opening angle
- Housing is connected to rear frame with separate locking mechanism (incl. individual key)
- 102° pivotable angle of the housing from the frame
- 1-point-locking-mechanism on the front door
- Side panels are lockable and removable
- 483 mm (19") profile rails mounted on the front side inside of the cabinet, galvanized
- 483 mm (19 ") profile rails are adjustable in depth and with height unit marking
- Load capacity of 483 mm (19") profile rails: 100 kg
- Rear frame with 483 mm (19") punch outs
- 1.1 1.5 strong sheet steel with a high loading capacity, powder coated
- Cable entry on the rear side and bottom with plastic cover and top with sliding cover
- Rear frame with brush strip for cable entry on top and base
- Roof is prepared for fan units (punched out entries)
- Ventilation slots for active and passive ventilation and exhausting
- Standard color: Grey (RAL 7035) and black (RAL 9005)
- Extensive range of equipment available

#### **Product Overview**

The Wall Mounting Cabinets of the Unique Series are made of a robust sheet steel construction with a minimum of seams. The side sections are detachable and lockable. It is fast and easy to mount the cabinet. Separately leveling feet or castors are available. Due to their flexibility the cabinets are ideal for all current IT and telecommunication applications.



# **Product Images**





# **Logistic Information**

Height unit (U)	Height in mm	Width x Depth in mm*	Net weight in kg
7U	420 mm	600x600 mm	31.5 kg
9U	509 mm		36 kg
12U	643 mm		42.4 kg
16U	820 mm		50.8 kg
20U	998 mm		57.5 kg


<sup>\*600</sup> mm depth= 450 mm housing + 150 mm rear frame


## **Product Number Information**


DN-19 07-U-3	DIGITUS® 7U wall mounting cabinet with swing frame, 420x600x600 mm,
	color grey (RAL 7035)
DN-19 09-U-3	DIGITUS® 9U wall mounting cabinet with swing frame, 509x600x600 mm,
	color grey (RAL 7035)
DN-19 12-U-3	DIGITUS® 12U wall mounting cabinet with swing frame, 643x600x600 mm,
	color grey (RAL 7035)
DN-19 16-U-3	DIGITUS® 16U wall mounting cabinet with swing frame, 820x600x600 mm,
	color grey (RAL 7035)
DN-19 20-U-3	DIGITUS® 20U wall mounting cabinet with swing frame, 998x600x600 mm,
	color grey (RAL 7035)





## **Technical Drawnigs**














BOTTOM VIEW

TOP VIEW

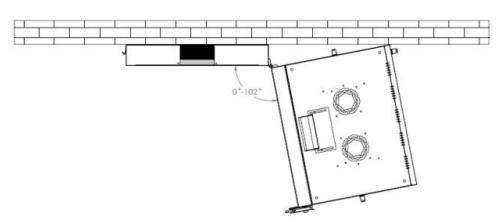

DOUBLE SECTION OPENING ANGLE





DIMENSIONS IN WIDTH AND HEIGHT

Assmann Electronic GmbH, Auf dem Schüffel 3, 58513 Lüdenscheid, Germany, info@assmann.com, printing errors, falsities and technical changes remain reserved