

Part number

CXMA 10



Male crimp contact, CX series, 40 A, turned silver plated, wire cross section 10 mm², AWG 8, cable diameter up to 7,5 mm


Product description		Material properties	
Product type	Crimp contact	Main material	Copper alloy
Series	CX		Compliant with exemption
Gender	Male	RoHs conformity	6(c): copper alloy containing up to 4% lead by weight
Technical data		China RoHs - EFUP	50
Current	40 A	REACH SVHC substances	Yes Lead
Wire cross-section	10,00 mm ²	SCIP number	C0979fba-9907-458f-a94a-db781440f273
AWG size	8	Approvals / Standards	
Contact type	Turned silver plated	Certifications	CSA, EAC
Further technical details		UL	ECBT2
Weight	3,10 g	cUL	ECBT8
Conductors stripping length	15 mm	General ordering information	
		EAN13 code	8015747188098
		eCl@ss 8.1	27440204
		ETIM 7.0	EC000796
		Packaging Information	
		Packaging length	112,00 mm
		Packaging height	95,00 mm
		Packaging width	117,00 mm
		Packaging weight	1,36 kg
		Packaging volume	1,24 dm ³
		Packaging description	Carton box
		Packaging quantity	400 Pcs
		Packaging EAN code	8015747207089
		Sub-packaging length	50,00 mm
		Sub-packaging height	44,00 mm
		Sub-packaging width	50,00 mm
		Sub-packaging weight	0,17 kg
		Sub-packaging volume	0,11 dm ³
		Sub-packaging description	Plastic box
		Sub-packaging quantity	50 Pcs
		Sub-packaging EAN barcode	8015747188203

Part number

CXMA 10



Catalogue drawings

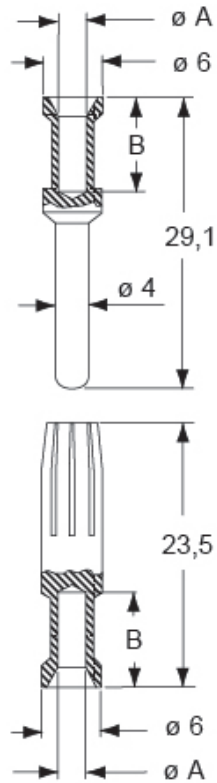

CXF and CXM contacts

conductor cross-sectional area (mm ²)	conductor slot $\varnothing A$ (mm)	conductor stripping length B (mm)
1,5	1,8	9
2,5	2,2	9
4	2,85	9,6
6	3,5	9,6
10	4,3	15

Notes

CXFA/CXMA 10

cable diameter up to 7.5 mm, contact section up to 10 mm²

Dimensions shown in mm are not binding and may be changed without notice.

California Proposition 65 Information



WARNING

This product can expose you to lead and its compounds, known to the State of California to cause cancer and/or reproductive toxicity. For more information go to www.P65Warnings.ca.gov.
