



Auxiliary
contactor
BGF00

Product designation

Product type designation

Contact characteristics


Number of poles	Nr.	4
Rated insulation voltage U_i IEC/EN	V	690
Rated impulse withstand voltage U_{imp}	kV	6
Operational frequency	min	Hz 25
	max	Hz 400
IEC Conventional free air thermal current I_{th}	A	10
Short-time allowable current for 10s (IEC/EN60947-1)	A	0
Protection fuse	gG (IEC)	A 16
Tightening torque for terminals	min	Nm 0.8
	max	Nm 1
	min	Ibin 9
	max	Ibin 9
Tightening torque for coil terminal	min	Nm 0.8
	max	Nm 1
	min	Ibin 9
	max	Ibin 9
Max number of wires simultaneously connectable	Nr.	2
Conductor section	AWG/Kcmil	
	max	12
Flexible w/o lug conductor section	min	mm ² 0.75
	max	mm ² 2.5
Flexible c/w lug conductor section	min	mm ² 1.5
	max	mm ² 2.5
Flexible with insulated spade lug conductor section	min	mm ² 1.5
	max	mm ² 2.5
Power terminal protection according to IEC/EN 60529		IP20 when properly wired

Mechanical features


Operating position	normal	Vertical plan
	allowable	±30°
Fixing		Screw / DIN rail 35mm
Weight	g	180

Conductor section	AWG/kcmil conductor section		
	max	12	
Auxiliary contact characteristics			
Thermal current I _{th}	A	10	
IEC/EN 60947-5-1 designation	A600 - Q600		
Operating current AC15	230V	A	3
	400V	A	1.9
	500V	A	1.4
Operating current DC12	110V	A	2.9
Operating current DC13	24V	A	2.9
	48V	A	1.4
	60V	A	1.1
	125V	A	0.3
	220V	A	0.1
	600V	A	0.6
Operations			
Mechanical life	cycles	20000000	
Safety related data			
Performance level B10d according to EN/ISO 13489-1	mechanical load	cycles	20000000
Mirror contacts according to IEC/EN 60947-4-1	YES		
EMC compatibility	yes		
AC coil operating			
Rated AC voltage at 50/60Hz	V	230	
AC operating voltage	of 50/60Hz coil powered at 50Hz		
	pick-up		
	min	%Us	75
	max	%Us	115
	drop-out		
	min	%Us	20
	max	%Us	55
	of 50/60Hz coil powered at 60Hz		
	pick-up		
	min	%Us	80
	max	%Us	115
	drop-out		
	min	%Us	20
	max	%Us	55
AC average coil consumption at 20°C	of 50/60Hz coil powered at 50Hz		
	in-rush	VA	30
	holding	VA	4
	of 50/60Hz coil powered at 60Hz		
	in-rush	VA	25
	holding	VA	3
	of 60Hz coil powered at 60Hz		
	in-rush	VA	30
	holding	VA	4

Dissipation at holding ≤20°C 50Hz	W	0.95
Max cycles frequency		
Mechanical operation	cycles/h	3600
Operating times		
Average time for Us control		
in AC		
Closing NO	min	ms 12
	max	ms 21
Opening NO	min	ms 9
	max	ms 18
Closing NC	min	ms 17
	max	ms 26
Opening NC	min	ms 7
	max	ms 17
in DC		
Closing NO	min	ms 18
	max	ms 25
Opening NO	min	ms 2
	max	ms 3
Closing NC	min	ms 3
	max	ms 5
Opening NC	min	ms 11
	max	ms 17
UL technical data		
Contact rating of auxiliary contacts according to UL		A600 - Q600
Ambient conditions		
Temperature		
Operating temperature		
	min	°C -50
	max	°C +70
Storage temperature		
	min	°C -60
	max	°C +80
Max altitude	m	3000
Resistance & Protection		
Pollution degree		3
Dimensions		

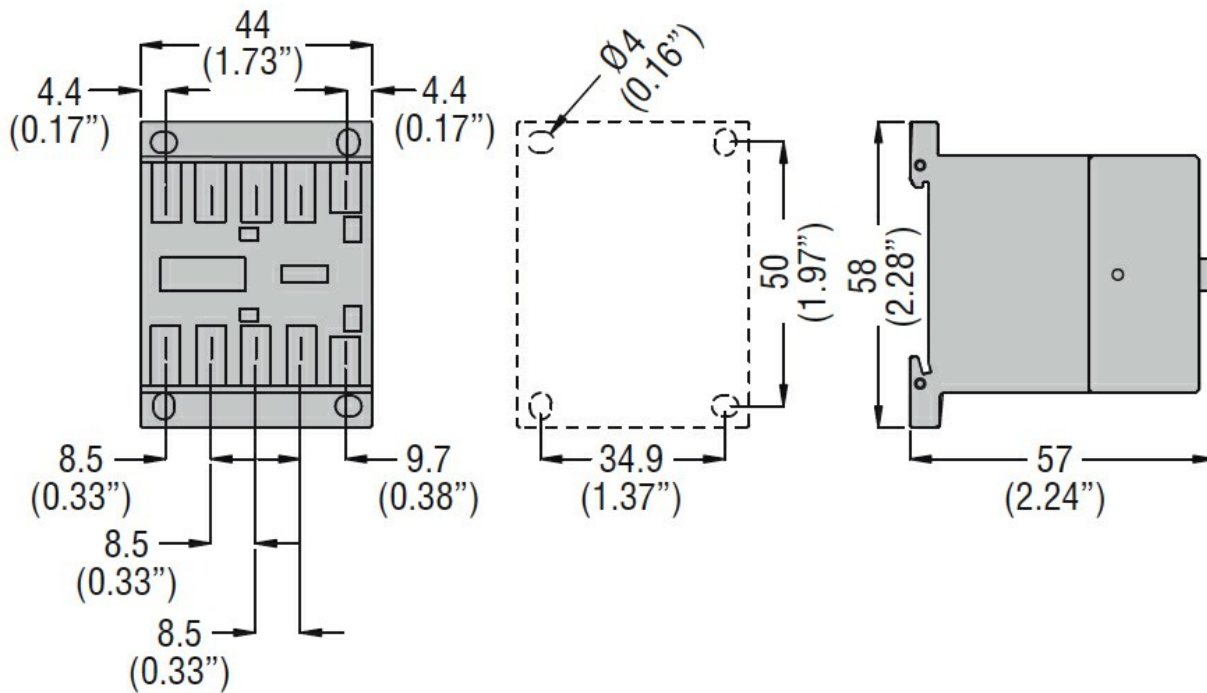

Wiring diagrams

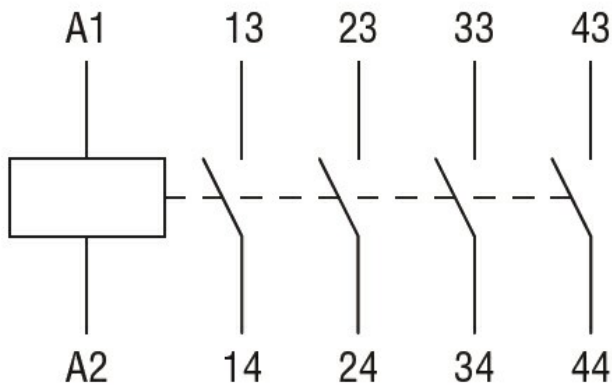

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1
CSA C22.2 n° 60947-5-1
IEC/EN 60947-1
IEC/EN 60947-5-1
UL 60947-1
UL 60947-5-1

Certificates

CCC
cULus
EAC

ETIM classification

ETIM 8.0

EC000196 -
Contactor relay