



## Fiche produit

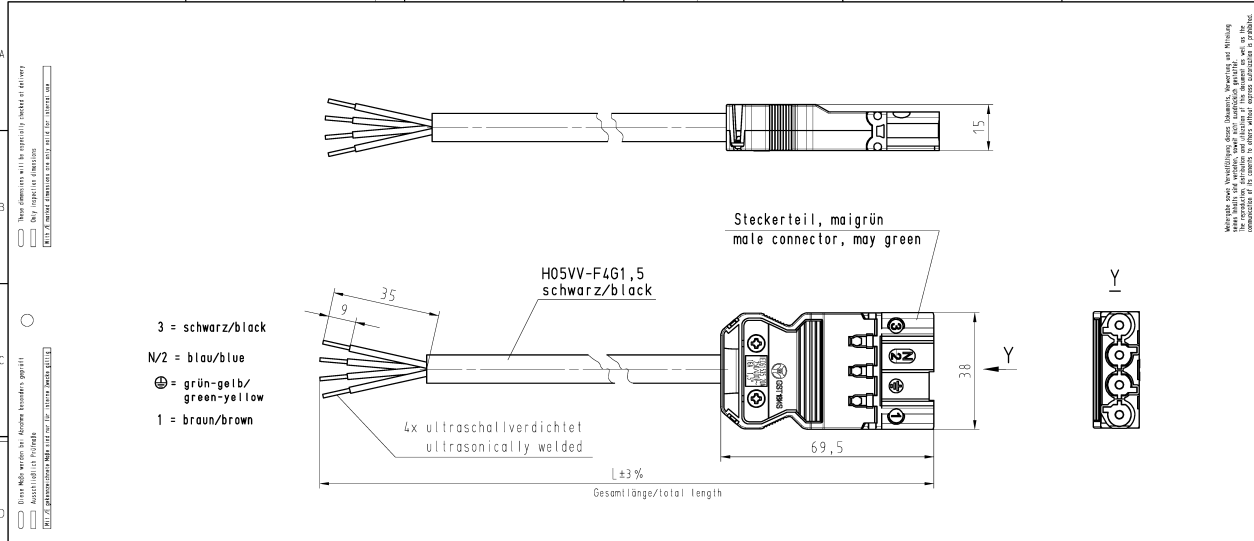
Article n° 92.207.5004.7

assemblage de câbles GST18I4KS-S 15E 50GN02



Article n°	92.207.5004.7
EAN	4049088333842
Unité de commande	10 Piece(s)

certificats/approbations

**Dessin technique**


3 = schwarz/black  
N/2 = blau/blue  
⊕ = grün-gelb/green-yellow  
1 = braun/brown

Steckerteil, maigrün  
male connector, may green

H05VV-F4G1,5  
schwarz/black

4x ultraschallverdichtet  
ultrasonically welded

15

35

9

69,5

38

Y

Y

L ± 3 %  
Gesamtlänge/total length

Teile-Nr. part-no.	L	Beispiel (Farbe: maigrün) example (colour: may green)	Typ type
92.207.XX04.7	XX in dm-Schritten	92.207.1004.7 = 10dm/L= 1000mm	GST1814KS-S 15 10GN02
U2.207.XX04.7	XX in m-Schritten	U2.207.1204.7 = 12 m/L=12000mm	GST1814KS-S 15 X12GN02

Weitere Daten siehe KATALOG oder eKatalog.  
Additional data see CATALOG or eCatalog.

www.wieland-electric.com  
eshop.wieland-electric.com

Toleranzsystem Size ISO 14095/Tolerance system Size ISO 14095.  Stufenbasis- und Deklinationsliste nach DIN 5002, IIR ist einzuhalten.  
(This ISO-standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances). Conformity with Wieland document MN 5026, IIR or IIRs if prohibited / see (except in case of special agreement) to be declared!

Fräsetoleranz nach  
General tolerance

ISO - Zeichnung, keine manuellen Änderungen  
ISO - drawing, no manual modifications allowed

Verwendung:  
First Use:

Blatt: 1 von 1  
Sheet: 1 of 1

Zeichnung Nr./Drawing No.

92.207.0504.7 01K

Werkstoff/Material: 2015 Tag/Date: 05.11.2020 Name: Mischl. T

Mischl. / Mixed

Maße in mm/dimensions are in mm

www.wieland  
www.wieland-electric.com

GST1814

KONFEKTLEITUNG

KS-S 15

Schraubanschluss/screw connection 250V 1,5qmm

92\_207\_0504\_17\_01K\_2 CADW3027 D:\etech 2015-11-05T10:29:56 1.000

3 4 5 6

A 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 M1 M2 M3 L G 1 1.1 2.1 1.1