


Raccords pour Caprirok Spécifications Techniques



Description

Matière : Laiton nickelé

IP 67 : protection suivant NF EN 60529

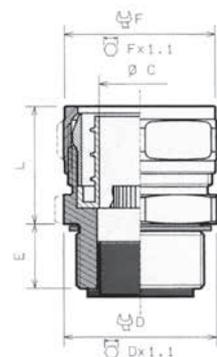


CONDUIT REPÈRE	RACCORD		E	L	C	F	D
	RÉFÉRENCE	FILETAGE ISO					
10	CAP641034	12	13	20	5.7	22	20
12	CAP641234	16	13	20	8.3	24	22
16	CAP641734	16	13	21	10.5	25	24
16	CAP641934	20	15	21	10.5	26	24
20	CAP642034	20	15	25	14.4	30	28
25	CAP642534	25	17	30	17.7	36	34
32	CAP643234	32	19	33	23	45	42
40	CAP644034	40	20	38	32	52	50
50	CAP645034	50	22	41	37.6	60	60
63	CAP646334	63	25	46	49	70	70

Terminus métallique Spécifications Techniques

Description

Matière : Laiton nickelé

Utilisation avec conduits Caprirok uniquement.



CONDUIT REPÈRE	RÉFÉRENCE	DIAMÈTRE EXTÉRIEUR A	DIAMÈTRE INTÉRIEUR C
10	CAP331014	13.8	5.7
12	CAP331214	16.2	8.3
16	CAP331614	19.9	10.5
20	CAP332014	23.8	14.4
25	CAP332514	29.8	17.7
32	CAP333214	36.4	23
40	CAP334014	45	32
50	CAP335014	51.4	37.6
63	CAP336314	62.8	49