1SET311697R0000 - ACTIVE

ENTRELEC | M8 Connector

TE Internal #: 1SET311697R0000


M8 Cable Assembly, 3 Position, 1 m, Sensor/Actuator, Code A, M8

Plug, M8 Socket, Double Ended, GF Nylon

View on TE.com >



Cable Assemblies > Copper Cable Assemblies > M8/M12 Cable Assemblies

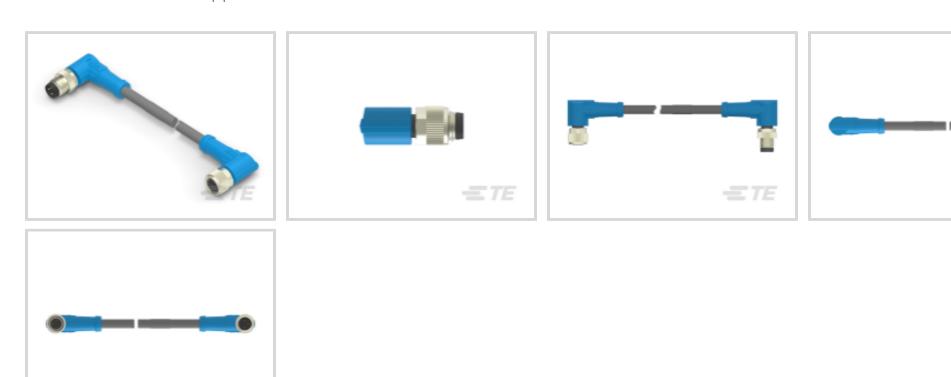

M8/M12 Application Type: Sensor/Actuator

=TE

Number of Positions: 3

Keying Code: A

Connector Type (End A): M8 Plug
Connector Type (End B): M8 Socket

Features

Product Type Features

| LED | Without |
|----------------------------|----------------|
| Product Type | Cable Assembly |
| Cable Type | PUR |
| Assembly Type | Pigtail |
| Connector Type (End A) | M8 Plug |
| Connector Type (End B) | M8 Socket |
| Cable Assembly Type | M8 |
| Configuration Features | |
| Number of Positions | 3 |
| Keying Code | A |
| Electrical Characteristics | |
| Operating Voltage | 60 VDC |
| Body Features | |
| Cable Exit Angle | Right Angle |



| Environmental Protection | With |
|--------------------------------|---------------------|
| Conductor Material | Copper Alloy |
| Connector Color | Blue |
| Wire Color | Brown, Blue, Black |
| Cable Jacket Color | Gray |
| Insulation Material | PVC |
| Contact Features | |
| Contact Current Rating | 3 A |
| Mechanical Attachment | |
| Screw & Hole Thread Size | M8 x M8 |
| Connector Orientation (End A) | Right Angle |
| Connector Orientation (End B) | Right Angle |
| Housing Features | |
| Housing Material | GF Nylon |
| Dimensions | |
| Overall Outside Cable Diameter | 4.5 mm |
| Wire Size | .25 mm ² |
| Operation/Application | |
| M8/M12 Application Type | Sensor/Actuator |
| Shielded | No |
| Other | |
| Field Serviceable | Yes |
| Cable Assembly Length | 1 m |

Product Compliance

Cable Assembly Configuration

For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU | Compliant with Exemptions |
|---|--|
| EU ELV Directive 2000/53/EC | Compliant with Exemptions |
| China RoHS 2 Directive MIIT Order No 32, 2016 | Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2022 (224) |

Double Ended



Candidate List Declared Against: JUL 2021 (219)

SVHC > Threshold:

Pb (1.9% in Component Part)

Article Safe Usage Statements:

Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

| Halogen Content | Not Low Halogen - contains Br or Cl > 900 |
|-----------------|---|
| | ppm. |

Solder Process Capability

Not reviewed for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Also in the Series | M8 Connector

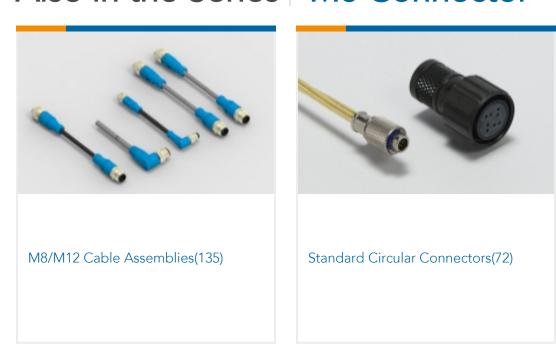

Documents

Product Drawings

M8 Cable Assembly, 3 Position, 1 m, Sensor/Actuator, Code A, M8 Plug, M8 Socket, Double Ended, GF Nylon



M8-MR-3P-M8-FR-PUR-1.0

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1SET311697R0000_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1SET311697R0000_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1SET311697R0000_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

Infographic - entrelec ews-linecard

English

Catalog - ENTRELEC-M8-M12-RJ45

English

Product Specifications

Application Specification

English

Application Specification

English