

PRODUCT-DETAILS

E 91/50

E 91/50 Fuse disconnecter



Informations générales

Extension du type de produit	E 91/50
Code de produit	2CSM279022R1801
EAN	8012542587422
Description courte	E 91/50 Fuse disconnecter
Description longue	E 90 50/125 fuse holders are appropriate to protect against overloads and short circuits. They are designed for use with cylindrical fuses from 50 to 125 A.

Technique

Adapté pour	E 90
Adapté pour la classe de produit	Fuse holders
Tension nominale (U_r)	acc. To IEC 690 V acc. To UL 690 V
Tension	AC-20B 690 V
Tension assignée d'isolement (U_i)	1 kV
Fréquence assignée (f)	50/60 Hz
Power Loss	at Rated Operating Conditions per Pole 5 W
Number of Protected	1

Poles

Nombre de pôles	1
Couple de serrage	3...3.5 N·m
Utilization Category	Connecting and disconnecting under no-load conditions - occasional actuation (AC-20B)
Lock Type	Padlockable
Type de montage	DIN-Rail
Type d'étanchéité	Sealing Wire
Material of Conductor	Copper
Options Provided	No
Recommended Screw Driver	Pozidriv 2
Connecting Capacity	Rigid 2.5...25 mm ² Rigid Stranded 2.5...35 mm ²
Taille de fusible	14x51 mm max. 90% with temp. +20 °C 50% with max. temp. +40 °C
Rated Operational Current AC (I _e)	50 A

Environnement

Température de l'air ambiant	Storage -5...+40 °C Storage Operation -25...+70 °C
Indice de protection	IP20
Resistance to Vibrations acc. to IEC 60068-2-6	2 to 13 Hz x= 1 mm peak 13 to 100 Hz y= 0.7 g peak
Résistance aux chocs selon CEI 60068-2-27	15g 18 shocks 11 ms
Statut RoHS	Following EU Directive 2011/65/EU and Amendment 2015/863 July 22, 2019
Informations RoHS	2CSC444009D2701
REACH Declaration	9AKK108467A9482
Informations environnementales	See RoHS Information
Conflict Minerals Reporting Template (CMRT)	9AKK108468A3363

Dimensions

Width in Number of Modular Spacings	1.5
Produit Largeur Net	0.0267 m
Produit Hauteur Net	0.0965 m
Produit Longueur Net	0.07326 m
Poids net	0.095 kg
Profondeur d'encastrement (t ₂)	73.26 mm

Commande

Emballage Niveau 1 Unités	box 4 pièce
Emballage Niveau 1 Poids	0.38 kg
E-Number (Finland)	3017008

Certificats et Déclarations (Numéro de document)

Certificat BV	9AKK108467A0329
CCC Certificate	9AKK108467A0342
Agence de certification	BV, Korean register, CCC, EAC, UL
Déclaration de Conformité - CE	2CSC444009D2701
EAC Certificate	9AKK107992A1034
Certificat KRS	9AKK108467A0338
Certificat LR	9AKK108467A0332
Certificat RINA	9AKK107992A0866
Certificat UL	9AKK107992A1040

Installation

Instructions et manuels	No document needed
-------------------------	--------------------

Downloads Préférés

Fiche produit, informations techniques	2CSC444002B0204
--	-----------------

Classifications


ETIM 8	EC002705 - Holder for cylindrical fuse
ETIM 9	EC002705 - Holder for cylindrical fuse
Catégorie DEEE	5. Small Equipment (No External Dimension More Than 50 cm)
WEEE B2C / B2B	Business To Consumer
CN8	85361050
UNSPSC	39121624
eClass	V11.0 : 27142121
Code de catégorie granulaire IDEA (IGCC)	4974 >> Holder for cylindrical fuse
Code de classification d'objet	F

Accessories

Identifiant	Description	Type	Quantity	Unit Of Measure
2CSM277523R1801	E 9F14 GG2 Fuse link	E 9F14 GG2	1	piece
2CSM277303R1801	E 9F14 GG4 Fuse link	E 9F14 GG4	1	piece
2CSM277083R1801	E 9F14 GG6 Fuse link	E 9F14 GG6	1	piece
2CSM291003R1801	E 9F14 GG8 Fuse link	E 9F14 GG8	1	piece
2CSM290983R1801	E 9F14 GG10 Fuse link	E 9F14 GG10	1	piece
2CSM290963R1801	E 9F14 GG12 Fuse link	E 9F14 GG12	1	piece
2CSM258783R1801	E 9F14 GG16 Fuse link	E 9F14 GG16	1	piece
2CSM257603R1801	E 9F14 GG20 Fuse link	E 9F14 GG20	1	piece
2CSM256423R1801	E 9F14 GG25 Fuse link	E 9F14 GG25	1	piece
2CSM258693R1801	E 9F14 GG32 Fuse link	E 9F14 GG32	1	piece
2CSM257513R1801	E 9F14 GG40 Fuse link	E 9F14 GG40	1	piece
2CSM256333R1801	E 9F14 GG50 Fuse link	E 9F14 GG50	1	piece

Catégories

Produits basse tension → Appareillage modulaire et parafoudres → Protection and Safety Devices → Cylindrical Fuse Holders and Fuse Switch Disconnectors

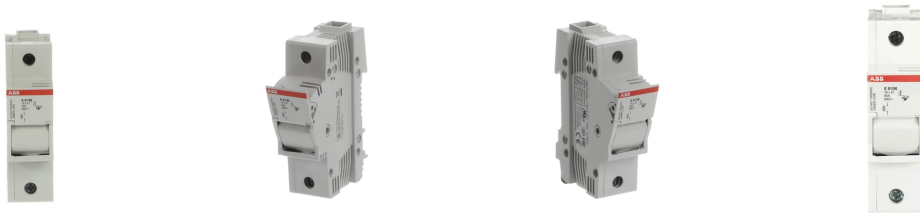

360°