


G5 Lampholders, Accessories

For fluorescent lamps T5 (T16)

Max. permitted temperature T_m
on the rear side of the lampholder: 110 °C


G5 push-through/surface-mounted lampholder
Lamp axis push-through lampholder: 13.2 mm
Lamp axis surface-mounted lampholder: 15.2 mm
Casing: PC, white, T110
Nominal rating: 2/500
Push-in terminals: 0.5–1 mm²
Lateral fixing clips for wall thickness 0.5–1.5 mm
Fixing slot for screw M3
Weight: 3.2 g, packaging unit: 1000 pcs.
Type: 09105

Ref. No.: 100305




G5 built-in lampholder
Casing: PC, white, T110
Nominal rating: 2/500
Push-in terminals: 0.5–1 mm²
Rear split pins for wall thickness up to 1.2 mm
Weight: 2.6 g, packaging unit: 1000 pcs.
Type: 09205

Ref. No.: 100310

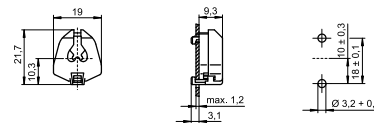

G5 built-in lampholder
Casing: PBT GF, white, rotor: PBT GF, white
T140, nominal rating: 2/500
Push-in twin terminals: 0.5–1 mm²
Lateral fixing clips
Weight: 2.8 g, packaging unit: 1000 pcs.
Type: 09404

Ref. No.: 505732



G5 built-in lampholders
Casing: PBT GF, white, rotor: PBT GF, white
T140, nominal rating: 2/500
Push-in twin terminals: 0.5–1 mm²
Rear split pins for wall thickness up to 1.2 mm
Weight: 2.9/3.3 g, packaging unit: 1000 pcs.
Type: 09405/09406

Ref. No.: 505733

Ref. No.: 505734 with spring adjustment

