

1SNA115485R0200 ✓ ACTIVE

ENTRELEC | ENTRELEC SNA

TE Internal #: 1SNA115485R0200

Modular Terminal Blocks, Feed-Through, Screw Clamp Terminal Block, Gray, Product Spacing .196 in [5 mm], 2 Position, Screw Terminal, ENTRELEC SNA

[View on TE.com >](#)



Connectors > Terminal Blocks & Strips > Modular Terminal Blocks



Block Function: **Feed-Through**

Modular Terminal Block Product Type: **Screw Clamp Terminal Block**

Rated Cross Section: **2.5 mm<sup>2</sup>**

Primary Product Color: **Gray**

## Features

### Product Type Features

Modular Terminal Block Product Type	Screw Clamp Terminal Block
-------------------------------------	----------------------------

### Configuration Features

Gauge Type	A3
Number of Levels	1
Number of Poles	2
Number of Circuits	1
Block Function	Feed-Through
Number of Positions	2

### Electrical Characteristics

Operating Voltage Rating (UL & CSA) (Max) - Main Circuit	600 V
Impulse Withstanding Voltage Rating (IEC)	8000 V
Voltage Rating (CSA)	600 V
Current Rating (CSA)	25 A
Dielectric Test Voltage	2000 V
Short-Time Withstanding Current Rating @ 1s	300 A

Voltage Rating (IEC)	1000 V
Current Rating (UL)	30 A
Current Rating (IEC)	24 A
Voltage Rating	1000 VAC

### Body Features

Product Weight	6.6 g [.233 oz]
Primary Product Color	Gray

### Termination Features

Termination Method to Wire & Cable	Screw Terminal
------------------------------------	----------------

### Mechanical Attachment

DIN Rail Mounting Type	G32, TH35-15, TH35-7.5
Tightening Torque	3.5 in-lbs
Connector Mounting Type	DIN Rail

### Housing Features

Housing Material	Polyamide 6.6
------------------	---------------

### Dimensions

Main Circuit Capacity - 1 Rigid Stranded Conductor per Screw Clamp	.2 – 4 mm <sup>2</sup>
Wire Stripping Length	10 mm [.393 in]
Main Circuit Capacity - 1 Flexible Conductor per Spring Clamp	.22 – 2.5 mm <sup>2</sup>
Tool Size	3.5 mm [.138 in]
Product Depth	40.5 mm
Product Width	5 mm [.196 in]
Product Length	40.5 mm
Product Height	44.5 mm
Rated Cross Section	2.5 mm <sup>2</sup>
Product Spacing	5 mm [.196 in]
Wire Size	2.5 mm <sup>2</sup>

### Usage Conditions

Storage Temperature Range	-55 – 110 °C [-67 – 230 °F]
Installation Temperature Range	-5 – 40 °C [23 – 104 °F]
Operating Temperature Range	-55 – 110 °C [-67 – 230 °F]

## Operation/Application

Circuit Application	Signal
---------------------	--------

## Industry Standards

IP Rating	IP20
UL Flammability Rating	UL 94V-0

## Product Compliance


[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


## Compatible Parts

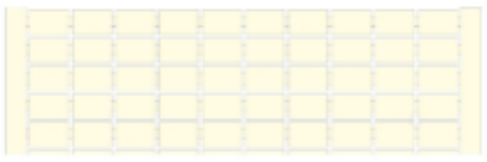

TE Part # 1SNA103890R2100  
RC510-YL




TE Part # 1SNA113542R1000  
PC5-2

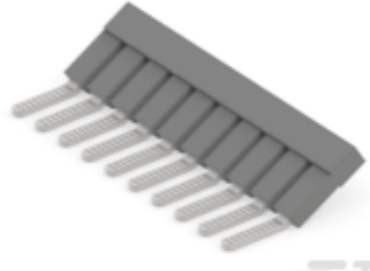


TE Part # 1SNA113544R1200  
PC5-10



TE Part # 1SNA114825R0500  
SCFM6

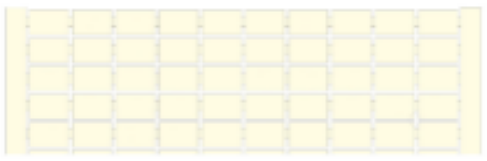

TE Part # 1SNA230000R1200  
RC55

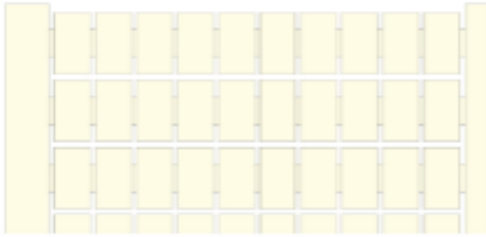

TE Part # 1SNA231000R0700  
RC510

TE Part # 1SNA007865R2600  
FC2

TE Part # 1SNA113550R2400  
EIP



TE Part # 1SNA116795R1100  
SCFCV1-2



TE Part # 1SNA118368R1600  
FEM6

TE Part # 1SNA118707R0300  
SCF6

TE Part # 1SNA163046R2400  
AL2

TE Part # 1SNA173627R2100  
EL6

TE Part # 1SNA176278R1600  
BJMI5-2

TE Part # 1SNA176279R1700  
BJMI5-3

TE Part # 1SNA176280R0500  
BJMI5-4

TE Part # 1SNA176281R2200  
BJMI5-5

TE Part # 1SNA176282R2300  
BJMI5-10


TE Part # 1SNA176816R1200  
CPV1-2

TE Part # 1SNA178745R1400  
CBM5


Also in the Series | **ENTRELEC SNA**



Modular Terminal Blocks(182)

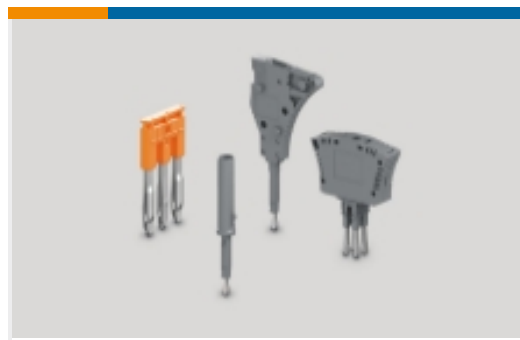

Terminal Block & Strip Conducting Accessories(26)

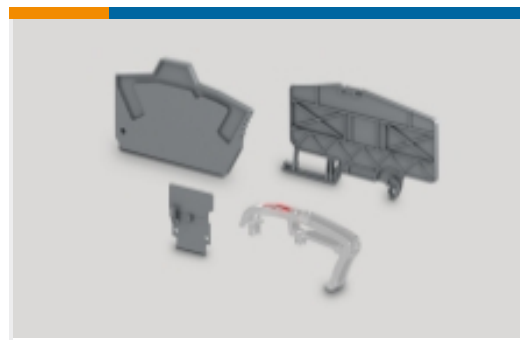

Terminal Block & Strip Insulating Accessories(14)

## Customers Also Bought



TE Part #1SNK900001R0000  
BAM4




TE Part #1SNA115479R2300  
M4/6.4A




TE Part #1SNA115486R0300  
MA2.5/5




TE Part #1SNA117600R0300  
FEDR61

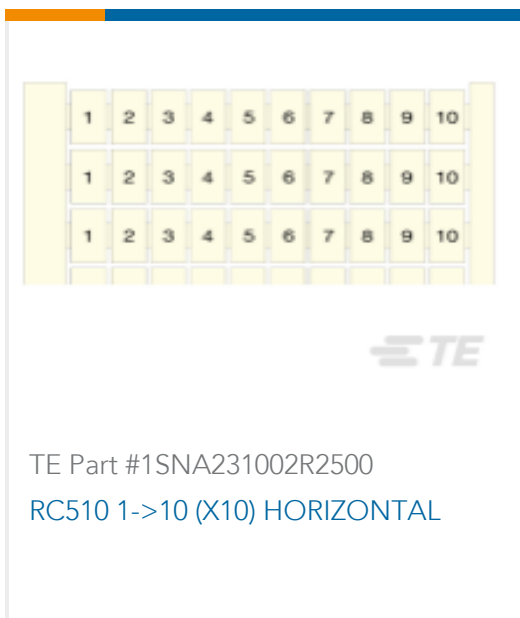

TE Part #1SNA231002R2500  
RC510 1->10 (X10) HORIZONTAL

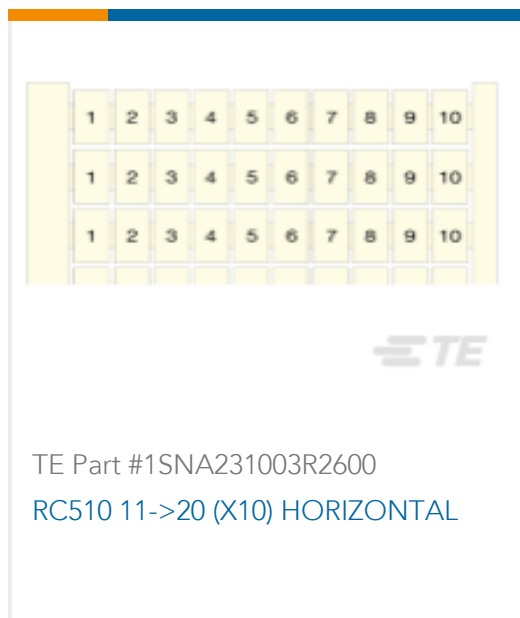

TE Part #1SNA231003R2600  
RC510 11->20 (X10) HORIZONTAL

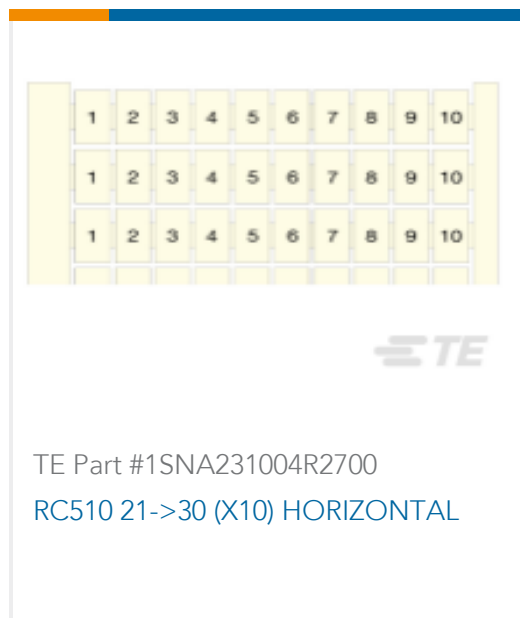


TE Part #1SNA231004R2700  
RC510 21->30 (X10) HORIZONTAL



TE Part #1SNA110491R1700  
DR4/6.1



TE Part #1SNA160496R2600  
DR4/6.P

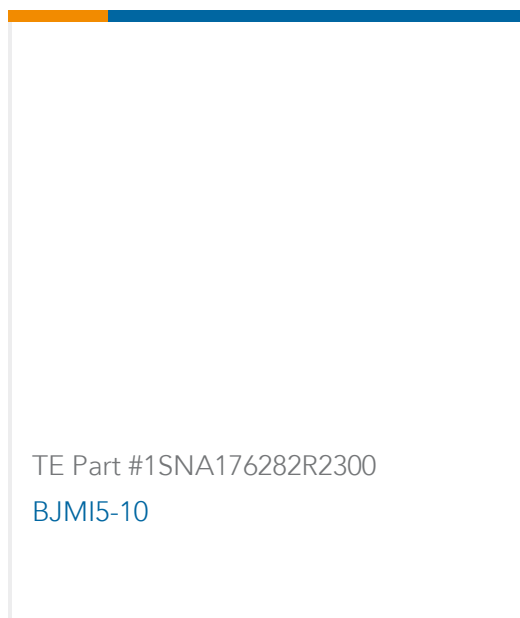

TE Part #1SNA176282R2300  
BJMI5-10

## Documents

[CAD Files](#)

[3D PDF](#)

[3D](#)

[Customer View Model](#)

[ENG\\_CVM\\_CVM\\_1SNA115485R0200\\_A.2d\\_dxf.zip](#)

[English](#)

[Customer View Model](#)

[ENG\\_CVM\\_CVM\\_1SNA115485R0200\\_A.3d\\_igs.zip](#)

1SNA115485R0200

Modular Terminal Blocks, Feed-Through, Screw Clamp Terminal Block, Gray, Product Spacing .196 in [5 mm], 2 Position, Screw Terminal, ENTRELEC SNA



English

Customer View Model

[ENG\\_CVM\\_CVM\\_1SNA115485R0200\\_A.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

## Datasheets & Catalog Pages

[Catalogue - ENTRELEC terminal-blocks-sna-series](#)

English

[MA2.5/5.1](#)

English

[ENTRELEC Terminal Blocks Catalogue \(RUS\)](#)