
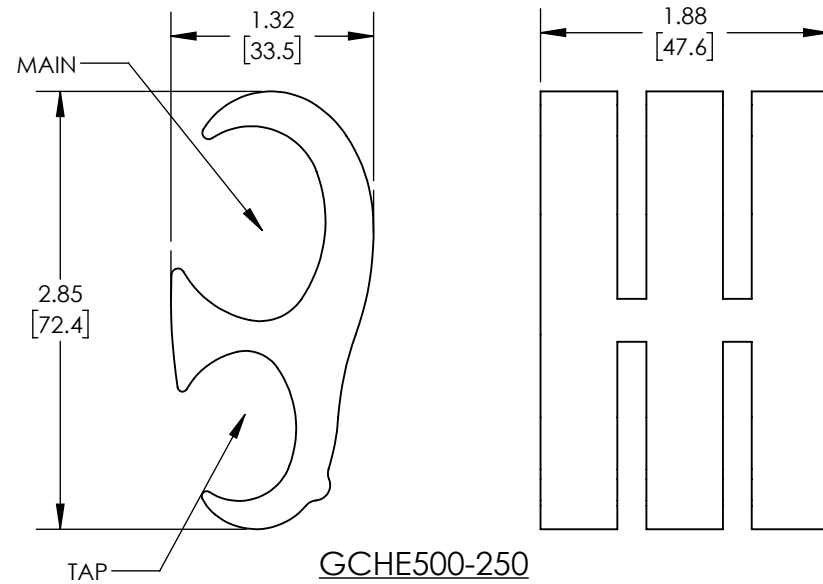


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

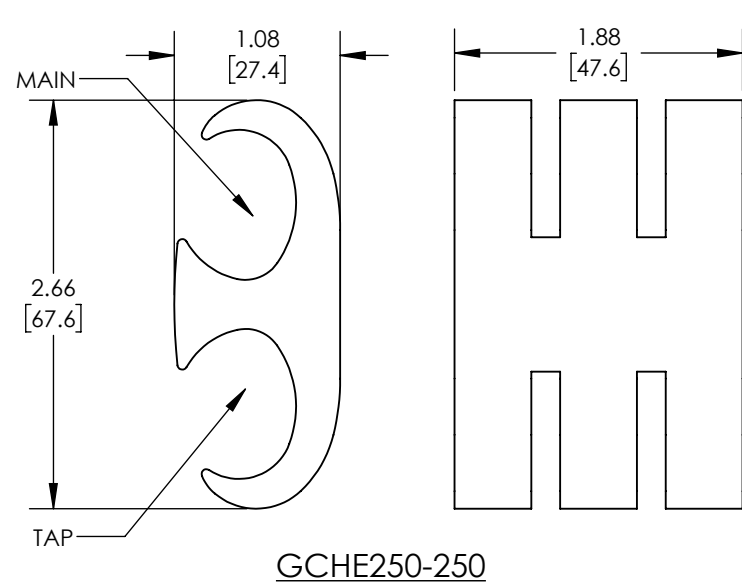

NOTES:

1. DIMENSIONS IN BRACKETS ARE MILLIMETERS.
2. UL 467 LISTED AND CSA 22.2 CERTIFIED FOR GROUNDING AND BONDING SUITABLE FOR DIRECT BURIAL IN EARTH OR CONCRETE WHEN CRIMPED WITH PANDUIT OR INDUSTRY STANDARD CRIMPING TOOLS & PANDUIT DIES.
3. ENHANCED CRIMP PROCESS WITH PATENTED TECHNOLOGY MEETS IEEE STD 837 2014.
4. PRE-APPLIED ANTI-OXIDANT COMPOUND ENSURES A HIGH QUALITY MECHANICAL AND ELECTRICAL BOND, SPEEDING INSTALLATION.
5. CABLE TIES ARE PROVIDED WITH THE TAPS TO RETAIN WIRES IN POSITION DURING CRIMPING.

PANDUIT PART NUMBER	MAIN - AWG [mm]			TAP - AWG [mm]	PANDUIT COLOR CODE	PANDUIT DIE INDEX NO.	NUMBER OF CRIMPS	STD. PKG. QTY.
	COPPER CABLE	GROUND ROD	REBAR	COPPER CABLE				
GCHE250-250	1/0 STR. - 250 kcmil [70-120 SQ. mm]	1/2"-5/8" ROD [12.7-15.9 mm]	3/8"-1/2"; #3-#4 REBAR [9.5-12.7mm; #10M-#13M REBAR]	1/0 STR. - 250 kcmil [70-120 SQ. mm]	BLACK	PG25	4	1
GCHE500-250	250 kcmil. - 500 kcmil [150-240 SQ. mm]	1/2"-3/4" ROD [12.7-19.1 mm]	5/8"-3/4"; #5-#6 REBAR [15.9-19.1mm; #16M-#19M REBAR]	1/0 STR. - 250 kcmil [70-120 SQ. mm]	BLUE	PG50	4	1



							TITLE HEAVY DUTY E-TAP GROUNDING CONNECTORS	
							CUSTOMER DRAWING	
							ITEM REVISION NAME	00235NBP/00
							DATASET FILE NAME	00235NBP-DC/00.SLDDRW
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]	
							.X ±	.XXX ±
							.XX ± .02 [.5]	ANGLES ±
00	9/18	JHNU	DAOS	RGB	DRAWING RELEASED		00235NBP-DC	
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN		
							DRAWN BY	JHNU
							DATE	9/18
							CHK	DAOS
							SCALE	N/A
							THIRD ANGLE PROJECTION	
							DRAWING NUMBER	00235NBP-DC
							SHEET 1 OF 1	
							SIZE	B