

Part number
CQF 21



Female insert, CQ series, crimp connection, 21 poles, 6,5 A 50 V 0,8 kV 3, size "21.21"


Product description		Material properties	
Product type	Insert	Main material	Polycarbonate (PC)
Series	CQ	Colour	RAL 7032 grey
Connection type	Crimp connection	RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
Gender	Female	China RoHs - EFUP	50
N. of poles	21 poles	REACH SVHC substances	Yes Lead
Size	Size "21.21"	SCIP number	5a97d67d-dd49-45fe-94c0-411f951ef5ee
Specification	Standard & HNM (High Number of Matings)	Approvals / Standards	
Technical data		Certifications	DNV, BV
Current	5 A	UL	ECBT2
Voltage	50 V	cUL	ECBT8
Rated impulse withstand voltage	0,8 kV	General ordering information	
Pollution degree	3	EAN13 code	8015747235471
Rated voltage according to UL/CSA	50 V AC/120 V DC	eCl@ss 8.1	27440205
IP degree of protection	IP20 without enclosure, IP44/IP66/IP67/IP68/IP69 with enclosure	ETIM 7.0	EC000438
Further technical details		Packaging Information	
Characteristics according to EN 61984	6,5A 50V AC / 120V DC 0,8kV 3	Packaging length	210,00 mm
Mating cycles	≥ 500	Packaging height	200,00 mm
Insulation resistance	≥ 10 GΩ	Packaging width	130,00 mm
Contact resistance	≤ 4 mΩ	Packaging weight	1,90 kg
Weight	8,00 g	Packaging volume	5,46 dm ³
Operating temperature range (min, max)	-40 °C ... +125 °C	Packaging description	Carton box
UL 94 flammability rating	V-0	Packaging quantity	200 Pcs
Tightening torque for fixing screws	M3: 0,5 Nm; 4,4 lb.in (Ph1 or 0,8 x 5,5 mm)	Packaging EAN code	8015747235495
		Sub-packaging length	197,00 mm
		Sub-packaging height	35,00 mm
		Sub-packaging width	113,00 mm
		Sub-packaging weight	0,38 kg
		Sub-packaging volume	0,78 dm ³
		Sub-packaging description	Carton tray
		Sub-packaging quantity	40 Pcs
		Sub-packaging EAN barcode	8015747235501

Part number

CQF 21




Catalogue drawings

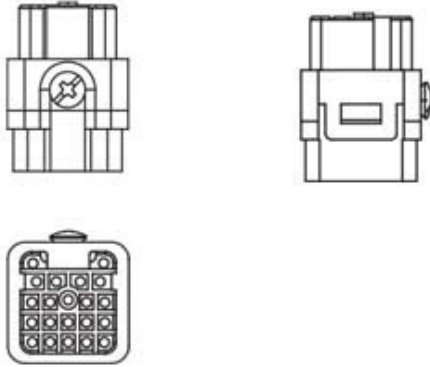

Derating curves

CQ 21 poles connector inserts
Maximum current load derating diagram

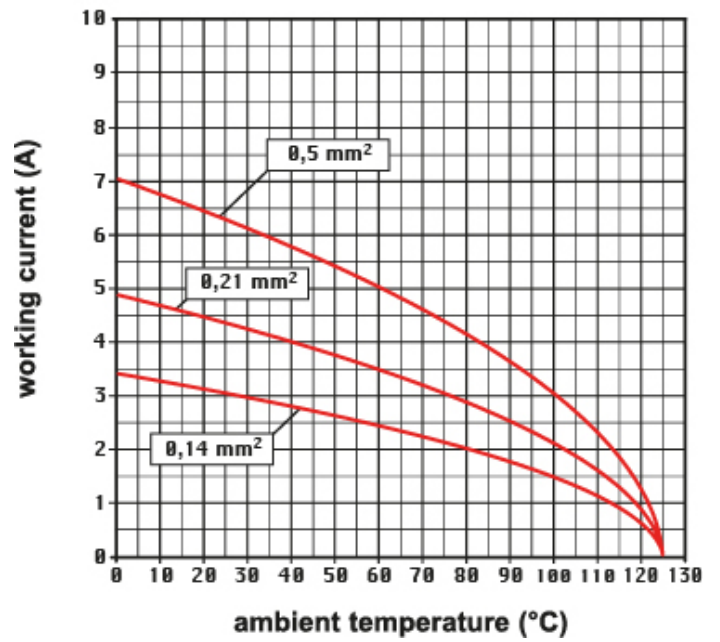

Notes

Dimensions shown in mm are not binding and may be changed without notice.