



G23 Lampholders

For single-ended compact fluorescent lamps TC-S

If the central hole is used for mounting, make sure there is no risk of rotation.



G23 push-fit lampholder
 Casing: PBT GF, white, T140
 Nominal rating: 2/250
 Push-in twin terminals: 0.5–1 mm²
 Split pins for wall thickness up to 1.2 mm
 Central fixing hole for screw M3
 Weight: 12 g, unit: 500 pcs.
 Type: 35004

Ref. No.: 101298

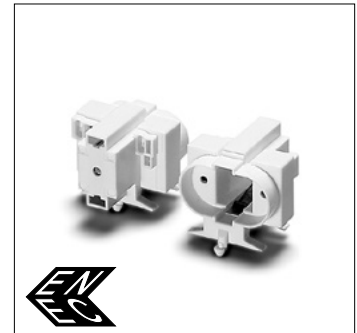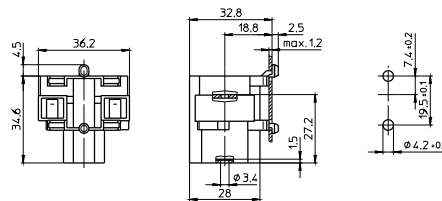



G23 surface-mounted lampholder
 Casing: PBT GF, white, T140
 Nominal rating: 2/250
 Push-in twin terminals: 0.5–1 mm²
 Fixing holes for screws M4
 Central fixing hole for screw M3
 Weight: 12.4 g, unit: 500 pcs.
 Type: 35006

Ref. No.: 101306

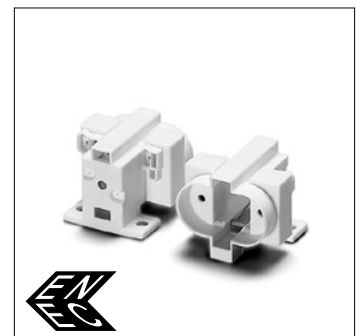

G23 lampholder
 For push-fit on track
 Casing: PBT GF, white, T140, nominal rating: 2/250
 Push-in twin terminals: 0.5–1 mm²
 Lateral fixing holes for self-tapping screws acc. to ISO 1481/7049-ST2.9-C/F
 Fixing holes for screws M4
 Central fixing hole for screw M3
 Weight: 14 g, unit: 500 pcs.
 Type: 35007

Ref. No.: 101310

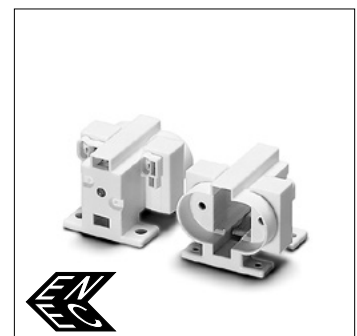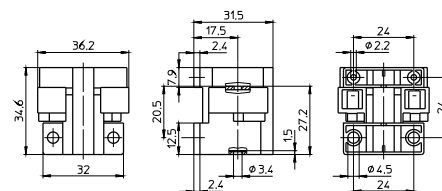

G23 lampholder, for cover caps (see p. 186–188)
 External thread 40x2.5 IEC 60399
 Casing: PBT GF, white, T140, nominal rating: 2/250
 Push-in twin terminals: 0.5–1 mm²
 Central fixing hole for screw M3
 When using the central hole for mounting additional depressions for anti-rotation pins have to be provided.
 For screw rings (see p. 200)
 Weight: 16.3 g, unit: 500 pcs.
 Type: 35010

Ref. No.: 101320

