



Product designation	Switching power supplies		
Product type designation	PSL1		
<b>Input characteristics</b>			
Input type	Single-phase		
Rated supply voltage AC	VAC	Multivoltage 100...240	
Operating range			
AC	min	VAC	90
	Max	VAC	264
DC	min	VDC	90
	Max	VDC	375
Rated frequency		Hz	50/60
Operational frequency	min	Hz	47
	max	Hz	63
Current consumption Max		mA	1500
Insulation voltage Input/Output	AC	VAC	3000
	DC	VAC	4242
Internal fuse (250VAC)	T2A		
<b>Output characteristics</b>			
Rated output voltage DC		VDC	48
Voltage trimming (potentiometer) DC	min	VDC	48
	Max	VDC	55
Rated output current		A	1.25
Rated output power		W	60
Temperature coefficient		%/°C	0.03
Line adjustment		%	±0.5
Load adjustment		%	±0.5
Efficiency		%	89
Overload protection	110...150%		
Short-circuit protection	Fold forward		
Ripple & noise		mV	50
<b>Indications</b>			
LED indicator for power on	Yes		
Power Rdy (Ready - minimum limit)	Yes (transistor output - 18.8VDC)		
<b>Connections</b>			
Terminals type	Screw		
<b>Ambient conditions</b>			

Temperature

Operating temperature

min	°C	-40
max	°C	+71

Storage temperature

min	°C	-40
max	°C	+85

Derating

%/°C	2.5
------	-----

Housing

Material

Plastic

IEC degree of protection

IP20

Dimensions (W x H x D)

mm 40.5 x 90 x 115

Weight


g 400

Installations

Mounting


On 35mm DIN rail

Dimensions

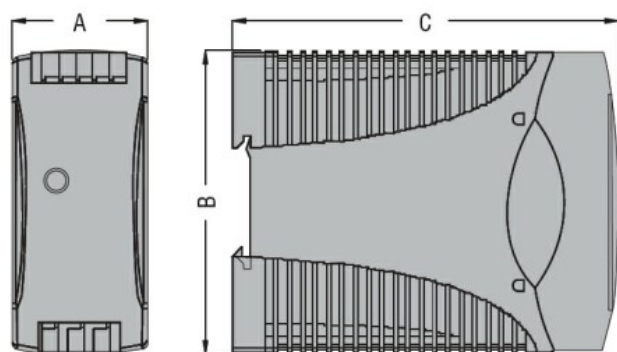

TYPE	A	B	C
PSL1 005 24	22.5 (0.88")	90 (3.54")	115 (4.53")
PSL1 010 24	22.5 (0.88")	90 (3.54")	115 (4.53")
PSL1 018 24	22.5 (0.88")	90 (3.54")	115 (4.53")
PSL1 030...	40.5 (1.59")	90 (3.54")	115 (4.53")
PSL1 060...	40.5 (1.59")	90 (3.54")	115 (4.53")
PSL1 100...	54 (2.12")	90 (3.54")	115 (4.53")
PSL2 100...	54 (2.12")	90 (3.54")	115 (4.53")
PSLR 20 24	54 (2.12")	90 (3.54")	115 (4.53")

Wiring diagrams

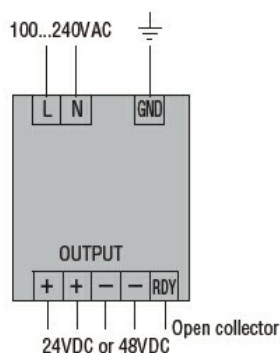

Certifications and compliance

Compliance

CSA C22.2 n°14

IEC/EN/BS 61000-6-2

IEC/EN/BS 61000-6-3

IEC/EN/BS 62368-1

UL 508

Certificates

cULus

EAC

RCM

ETIM classification

ETIM 8.0

EC002540 - DC-  
power supply