



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

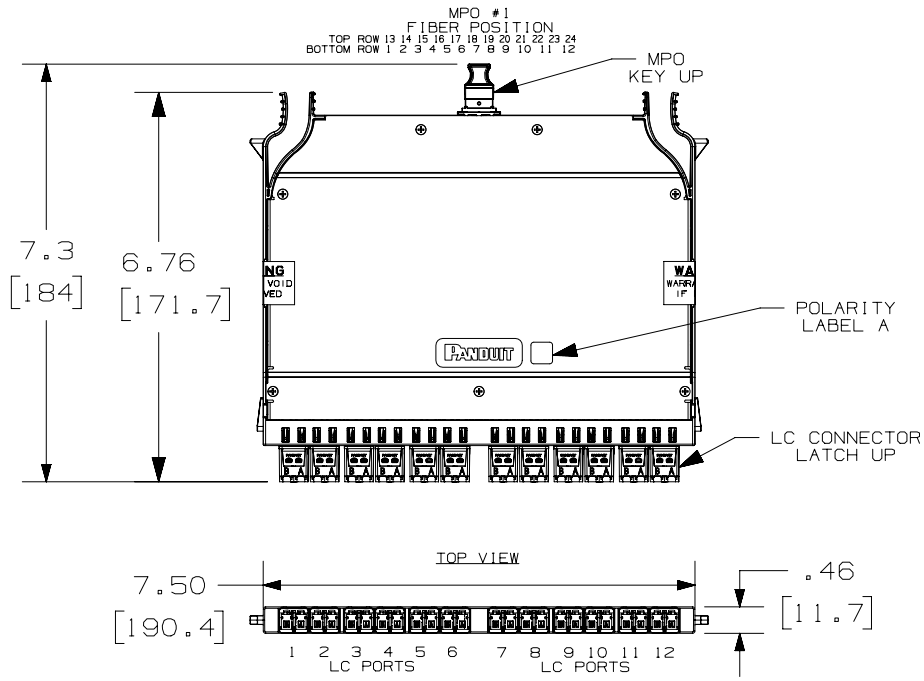


NOTES:

1. SEE CATALOG FOR COMPLETE LIST OF PARTS APPLICABLE FOR USE WITH THIS PRODUCT.
2. PART NUMBERS: SEE SHEET 2 FOR ALL PART NUMBERS.
3. CASSETTE WEIGHT: 6.2oz (175g)

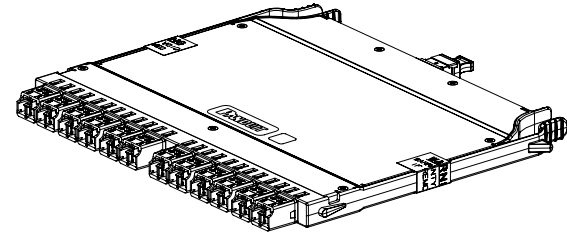

FIBER POSITION FROM LC END TO MPO END																								
A CONNECTIVITY CASSETTE																								
LC PORT NUMBER	1		2		3		4		5		6		7		8		9		10		11		12	
	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A	B	A
MPO #1	13	1	14	2	15	3	16	4	17	5	18	6	19	7	20	8	21	9	22	10	23	11	24	12

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
OOE	08-01-19	SAT	WJM	EJH	C. REMOVED P/N FHCZO-24F-VLA.	12F187MR-DC
OOD	05-23-19	SAT	DWW	EJH	B. ADDED LC/ACP CASSETTES.	12F187MR-DC
OOC	04-11-18	SAT	TMSE	EJH	A. ADDED P/N FHCZO-24F-VLA.	12F187MR-DC
OOB	05-24-17	SAT	TMSE	EJH	RELEASED TO PRODUCTION	12F187MR-DC


TITLE						
HD FLEX BREAKOUT CASSETTE, 12-PORT DUPLEX LC TO (1) 24-FIBER MPO (BASE 12)						
CUSTOMER DRAWING						
ITEM REVISION NAME				12F187MR/00		
DATASET FILE NAME				12F187MR_DC/00E		
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm)				PART NUMBER		
.x ± .1 [2.54] .xxx ± .005 [.127]				SEE TABLE		
.xx ± .01 [.25] ANGLES ± 5 °				DRAWING NUMBER:		
				12F187MR-DC		
DRAWN BY	DATE	CHK	SCALE	SIZE		
SAT	03-14-17	TMSE	NONE	SHT 1 OF 2 A		

2

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

CASSETTE PART NUMBER	DESCRIPTION
FHC9N-24F-10A	OS2 HD FLEX CASSETTE, 12-PORT DUPLEX LC TO (1) 24-FIBER MPO, A CONNECTIVITY (BASE 12)
FHCX0-24F-10A	OM3 HD FLEX CASSETTE, 12-PORT DUPLEX LC TO (1) 24-FIBER MPO, OPTIMIZED LOSS, A CONNECTIVITY (BASE 12)
FHCZ0-24F-10A	OM4 HD FLEX CASSETTE, 12-PORT DUPLEX LC TO (1) 24-FIBER MPO, OPTIMIZED LOSS, A CONNECTIVITY (BASE 12)
FHCS0-24F-10A	OM4+ HD FLEX CASSETTE, 12-PORT DUPLEX LC TO (1) 24-FIBER MPO, OPTIMIZED LOSS, A CONNECTIVITY (BASE 12)
FHC9N-24F-LAA	OS2 HD FLEX CASSETTE, 12-PORT DUPLEX LC TO (1) 24-FIBER MPO, STANDARD LOSS, A CONNECTIVITY (BASE 12)

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	TITLE				PART NUMBER	
							HD FLEX BREAKOUT CASSETTE, 12-PORT DUPLEX LC TO (1) 24-FIBER MPO (BASE 12)				SEE TABLE	
							CUSTOMER DRAWING				PANDUIT	
							ITEM REVISION NAME 12F187MR/00				DRAWING NUMBER: 12F187MR-DC	
							DATASET FILE NAME 12F187MR_DC/00E					
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm)					
							.x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 °					
					SEE REV SHEET FOR REVISIONS							
							DRAWN BY	DATE	CHK	SCALE		
							SAT	03-14-17	TMSE	NONE	SHT 2 OF 2	
											A	

2

1