
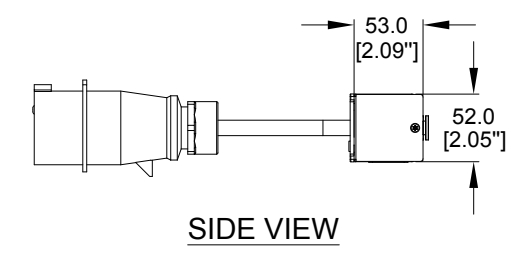
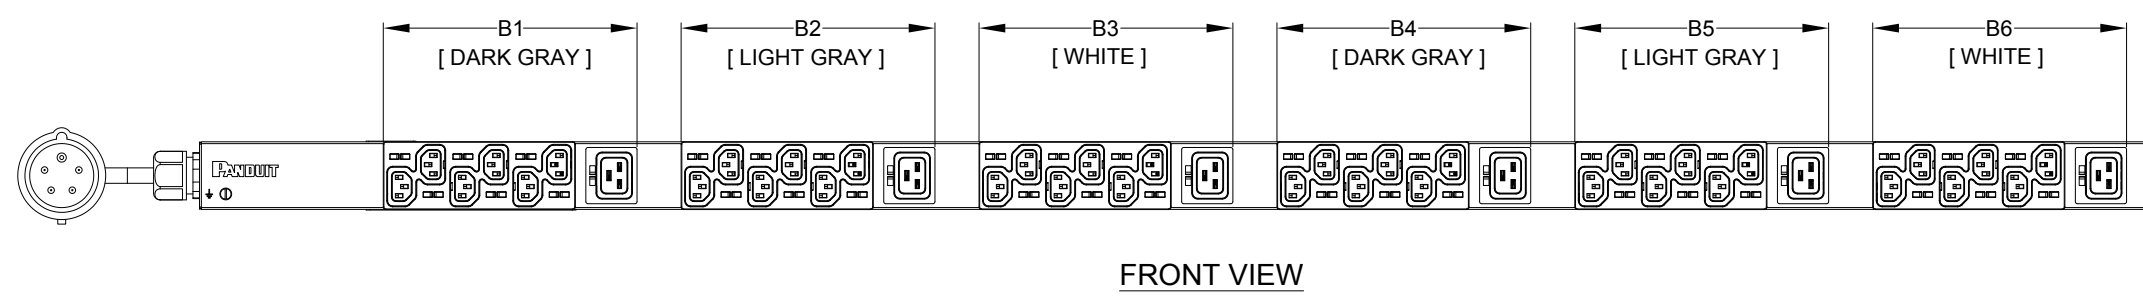
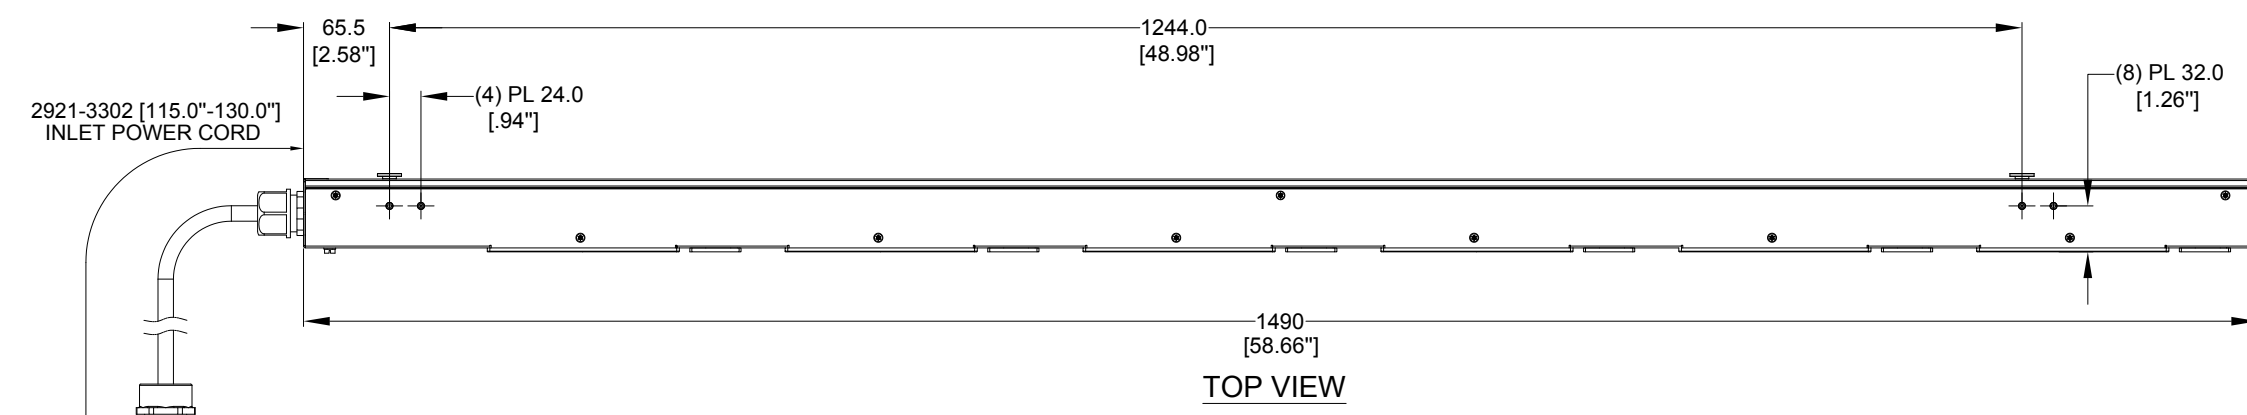



PANDUIT P/N	WEIGHT
P42B44M	4.6kg

NOTES:

- IDENTIFICATION:
 

UNIT TYPE:	BASIC
ORIENTATION:	VERTICAL, MID
OUTLET QTY&TYPE:	(36)C13, (6)C19
BREAKER QTY&TYPE:	N/A
INPUT VOLTAGE:	200-240/346-415VAC, WYE
INPUT CURRENT:	16A
INPUT PHASE:	THREE-PHASE WYE
RATED POWER:	11.0kVA
INPUT PLUG:	IEC 60309 3P+N+E 6H 16A
INPUT CORD LENGTH:	3m [10']
- ACCESSORIES:
  - POCKET GUIDE
- RoHS COMPLIANT
- VISIT PANDUIT'S ON-LINE CATALOG AT [WWW.PANDUIT.COM](http://WWW.PANDUIT.COM) FOR ADDITIONAL PRODUCT INFORMATION CONTAINED IN THE SPECIFICATION SHEET AS WELL AS A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
- MAXIMUM ALLOWABLE INPUT POWER = 11.0kW
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES

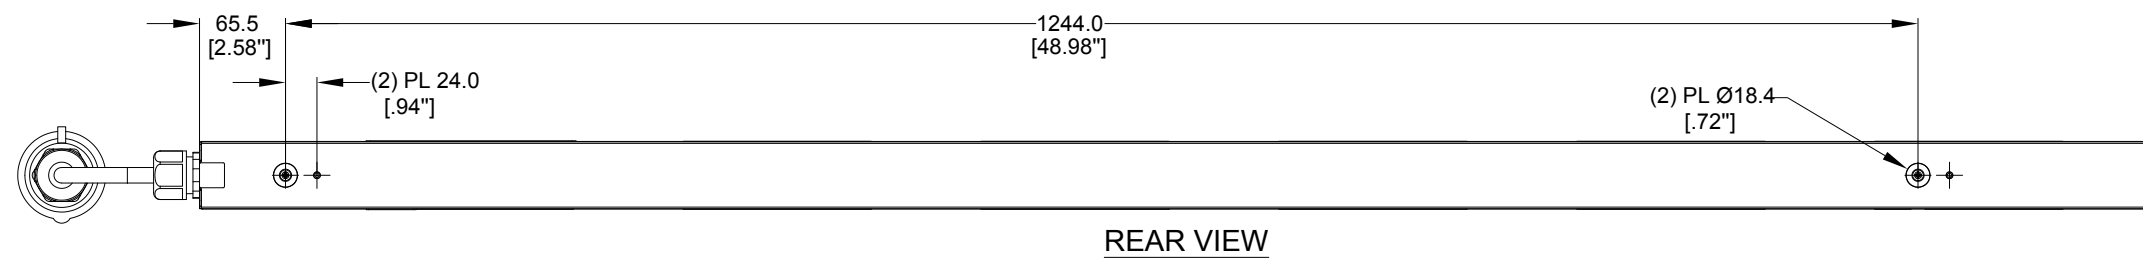

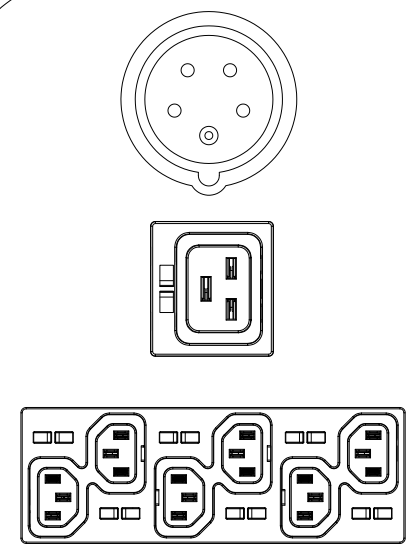

**PLUG**  
16 AMP, 230/400V x 3~ WYE  
4P/5W  
IEC 60309, SPLASHPROOF IP44  
2Q (S); 4R (W), 6H

**SIX (6)  
RECEPTACLES**  
16 AMP, 250V  
STRAIGHT BLADE  
IEC 60320 / C19

**THIRTY-SIX (36)  
RECEPTACLES**  
10 AMP, 250V  
STRAIGHT BLADE  
IEC 60320 / C13

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
01B	08/21/2017	DI.ZHAI	MIM	EDM	REVISED TOLERANCES	P42B44M
01A	06/28/2017	DI.ZHAI	MIM	EDM	INITIAL RELEASE	P42B44M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN
		DATE
		PRINT
TITLE BASIC SERIES PDU P42B44M CUSTOMER DRAWING		
ITEM REVISION NAME		<b>PANDUIT</b>
DATASHEET FILE NAME:		
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR: N/A
Tolerance(mm) 04<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		DRAWING NUMBER: P42B44M_DC
THIRD ANGLE PROJECTION	DRAWN BY: DATE DI.ZHAI 05/24/2017	SCALE NONE
	CHK SEAN	SHT 1 OF 1