



Product designation	Variable speed drives	
Product type designation	VLB3	
General characteristics		
Rated power supply voltage	400...480VAC 50/60Hz	
Rated output voltage	VAC	Three-phase 0... 480VAC 0-599Hz
Rated output current	A	16.5
Rated output power	kW	7.5
Rated output power	HP	10 (Heavy load) / 15 (Standard load)
EMC filter	Built-in EMC suppressor cat. C2	
Communication port	RS485, Modbus- RTU	
Technical features		
Input type	Three-phase	
Rated mains voltage	VAC	400...480
Operating mains voltage range	VAC	340...528
Rated mains frequency	Hz	50/60
Operating mains frequency range	Hz	45...65
Rated mains current without mains choke	20 (heavy load) / 28 (standard load)	
Rated mains current with mains choke	15.7 (heavy load) / 22 (standard load)	
Output type	Three-phase	
Output voltage range	VAC	0...480
Output frequency range	Hz	0...599
Current overload	%/s	150% for 60s; 200% for 3s
Apparent output power	11 (heavy load) / 15 (standard load)	
Power loss	4kHz: 185W (heavy load) / 253 (standard load)	
Brake chopper	Yes	
Switching frequency	2...16kHz	
Max motor cable length	Shielded	
	Without EMC category	m 100

Category C1	m	3
Category C2	m	20
Category C3	m	50

Unshielded

Without EMC category m 200

Functions

Motor control modes	V/f linear, quadratic torque, sensorless vector control, ECO mode, servo control with encoder feedback, multipoint V/f curve, V/f closed loop control with encoder feedback, torque setpoint, sensorless
Speed reference signals	External potentiometer 0...10kΩ Voltage signals: 0...10VDC or -10...+10VDC Current signals: 0/4...20mA Buttons on front keyboard Door-mount installation kit 15 preset speeds via digital inputs Motor potentiometer
3-wire control	Yes
S-shape curves	Yes
Slip compensation	Yes
Flying restart	Yes
Access to DC bus	Yes
DC braking	Yes
DC injection at start	Yes
PID control	Yes, with sleep and rinse function
Sequencer (programmable frequency/time cycles)	Yes
Preset speeds	Yes
Motorpotentiometer	Yes
Different parameter configuration sets	Yes
Parameters changeover function	Yes
Favorite parameters menu	Yes
Autotuning	No
Safe torque Off (STO) safety function	Optional
PTC probe input	Yes

Protections	Overcurrent Output short circuit and earth/ground leakage Overvoltage Undervoltage Phase loss Motor heat overload (i2t) Overspeed Speed reverse
-------------	--

Special funct.	Multi-pump PID control (1 main pump frequency regulated + 2 auxiliary pumps activated in direct mode in case of necessity)
----------------	--

Input and Output

Number of digital input	Nr.	5
-------------------------	-----	---

Digital input type	Selectable PNP or NPN logic
--------------------	-----------------------------

Number of digital output	Nr.	2
--------------------------	-----	---

Digital output arrangement	1 relay output with changeover contact (C/O-SPDT) + 1 digital output
----------------------------	--

Output contacts ratings	Relay output: 3A 250VAC Digital output: 100mA max 30VDC
-------------------------	--

Number of analog input	Nr.	2
------------------------	-----	---

Analog input type	Configurable 0/2...10VDC, -10...+10VDC, 0...5VDC, 0/4...20mA
-------------------	--


Number of analog output	Nr.	1
-------------------------	-----	---

Analog output type	configurable as 0...10VDC, 0...5VDC, 2...10VDC, 0/4...20mA
--------------------	--

Ambient conditions

Temperature	Operating temperature	min	°C	-10
		max	°C	+55

			switching frequency 2 or 4kHz: 2.5%/°C over 45°C
	Current derating		switching frequency 8 or 16kHz: 2.5%/°C over 40°C
<hr/>			
Storage temperature			
	min	°C	-25
	max	°C	+60
<hr/>			
Relative humidity		%	5...95% (with no condensing)
<hr/>			
Max altitude		m	4000m (over 1000m derate the rated current by 5%/1000m)
<hr/>			
Maximum Pollution degree			2
<hr/>			
Overvoltage category			III up to 2000m altitude (II above 2000m)
<hr/>			
Housing			
Installation position			Vertical
<hr/>			
IP degree of protection			IP20
<hr/>			
Dimensions (W x H x D)		mm	120 x 305 x 130
<hr/>			
Weight		Kg	3.95
<hr/>			
Dimensions			

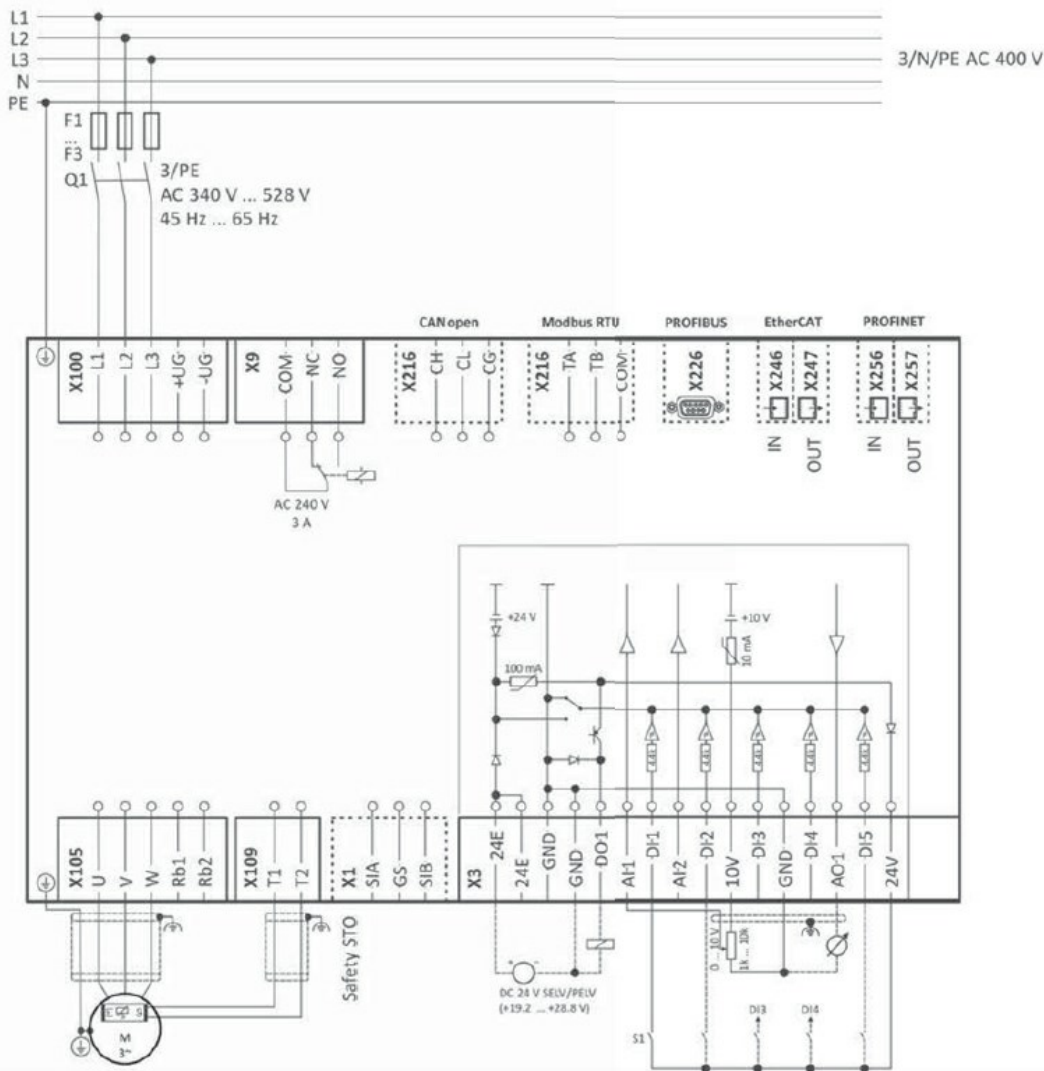

Certifications and compliance

Compliance

CSA 22.2 n°274
 EN 61800-5-1
 UL61800-5-1

Certificates

CSA
 cULus
 EAC
 RCM

ETIM classification

ETIM 8.0

EC001857 -
 Frequency
 converter =< 1 kW