


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

Material	High Conductivity Seamless Copper Tube
Plating	Electro-Tin
Wire Size	777 STR/FLEX
Wire Type	Stranded Copper: Locomotive
Wire Strip Length	3-1/16 in.
Stud Size	1/2 in.
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
UL Temperature Rating	90° C
C.S.A Certified Wire Connector	N/A
Panduit Color Code on Barrel	YELLOW
Panduit Die Index No. on Barrel	P115
Alternate Industry Die Index No. () on Barrel	(L115)

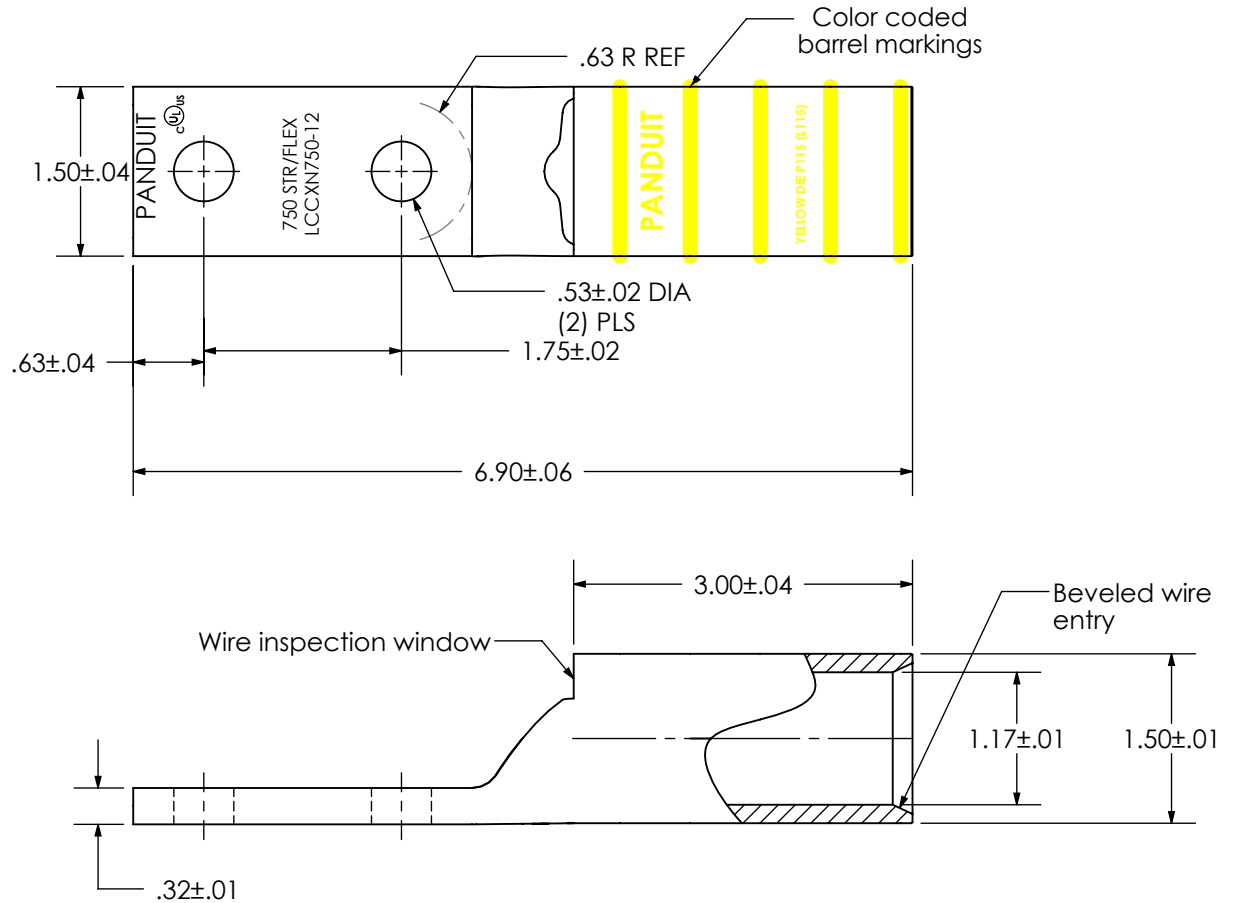

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
01	4/19	JHNU	JHNU	RGB	REVISED WIRE SIZE: 777 STR/FLEX WAS 750 STR/FLEX	09J003CD-LCCXN750-12-CUST
00	8/15	JHNU	JHNU	RGB	DRAWING RELEASED	09J003CD-LCCXN750-12-CUST

PANDUIT CORP. TINLEY PARK, ILLINOIS

LCCXN750-12-3
Copper Lug - Narrow Tongue, Two-Hole, Long Flex Barrel with Window

SCALE N/A DRAWING NO / CAD FILE LCCXN750-12-CUST