
SELECTOR SWITCH ACTUATOR KEY Ø22MM PLATINUM SERIES CHROMED PLASTIC, 2 POSITION, 0 < 1 WITH DIFFERENT KEY CODE



Product designation Product type designati	ion			Selector switch actuator key - 2 position LPCS34
General characteristics	S			
Colour				Black
Type of positions				Selector switch
Material				Polyamide
IEC degree of protect	ion			IP66, IP67 and IP69K
Mechanical features				
Mechanical life			cycles	1000000
Mounting adapter				LPXAU120
Weight			g	60
UL technical data				
UL degree of protection	on			Type1, 2, 3R, 4, 4X, 12, 12K
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-25
		max	°C	+70
	Storage temperature			
		min	°C	-40
		max	°C	+85
Dimoneione				

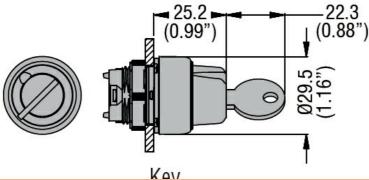

O	•		
Certificat	inne and	comr	าแอทดอ
Certificat	ions and		Jiianice

Com	nl	iar	CP
COIII	νı	ıaı	いして

CSA C22.2 n° 14

IEC/EN/BS 60947-1 IEC/EN/BS 60947-5-1

UL508

Certificates

CCC

cULus





SELECTOR SWITCH ACTUATOR KEY Ø22MM PLATINUM SERIES CHROMED PLASTIC, 2 POSITION, 0 < 1 WITH DIFFERENT KEY CODE

ETIM classification

ETIM 8.0

EC000222 -Front element for selector switch