
SELECTOR SWITCH ACTUATOR KEY Ø22MM PLATINUM SERIES CHROMED PLASTIC, 3 POSITION, 1 > 0 - 2 WITH DIFFERENT KEY CODE. WITHDRAL AT 0



Product designation Product type designation			Selector switch actuator key - 3 position LPCS35
General characteristics			
Colour			Black
Type of positions			Selector switch
Material			Polyamide
IEC degree of protection			IP66, IP67 and IP69K
Mechanical features			
Mechanical life		cycles	1000000
Mounting adapter			LPXAU120
Weight		g	60
UL technical data			
UL degree of protection			Type1, 2, 3R, 4, 4X, 12, 12K
Ambient conditions			
Temperature			
Operating temperature			
	min	°C	-25
	max	°C	+70
Storage temperature			
	min	°C	-40
	max	°C	+85
Dimensions			

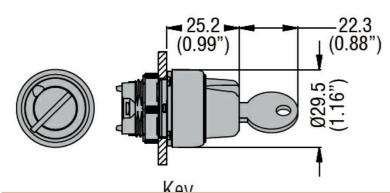

Certificat	ione one	0000	lionoo
Cermicai	ions and		папсе
Corumoat	iono ana	COLLIP	mar roo

Com	nlia	nce
COIII	pna	1100

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-5-1

UL508

Certificates

CCC

cULus





SELECTOR SWITCH ACTUATOR KEY Ø22MM PLATINUM SERIES CHROMED PLASTIC, 3
POSITION, 1 > 0 - 2 WITH DIFFERENT KEY CODE. WITHDRAL AT 0

ETIM classification

ETIM 8.0

EC000222 -Front element for selector switch