
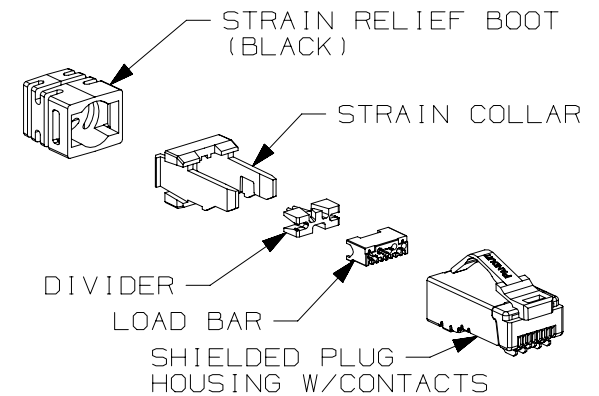


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

1. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A LIST OF CURRENT PARTS APPLICABLE FOR USE WITH THIS PRODUCT.
2. DIMENSIONS IN [ ] ARE METRIC.
3. WEIGHT: 0.743LB/100 PCS [ 337 g/100 PCS ]
4. PART INCLUDES:
  - 1-HOUSING, LOAD BAR, DIVIDER, STRAIN COLLAR: THERMOPLASTIC UL94V-0 RATED
  - 1- STRAIN RELIEF BOOT: TPE-UL94-HB RATED
  - 8-CONTACT TERMINALS: PHOSPHOR BRONZE ELECTROPOLISHED & PLATED WITH 50 μ" MIN GOLD IN MATING AREA, GOLD FLASH IN REMAINDER, 100 μ" MIN NICKEL UNDERPLATE
  - 1- SHIELD: CARTRIDGE BRASS W/NICKEL PLATING
5. PLUG ACCEPTS 4 PAIR .300" DIA WITH 24-26AWG CONDUCTOR WITH AN INSULATION DIAMETER OF 0.036" (0.91 mm) - 0.042" (1.07 mm). TERMINATED CONTACT HEIGHT DIMENSION: .237±.005".
6. MEETS DIMENSIONAL REQUIREMENTS OF FCC PART 68 & IEC 60603-7. UL & CSA LISTED. RATED FOR 2500 MATING CYCLES.

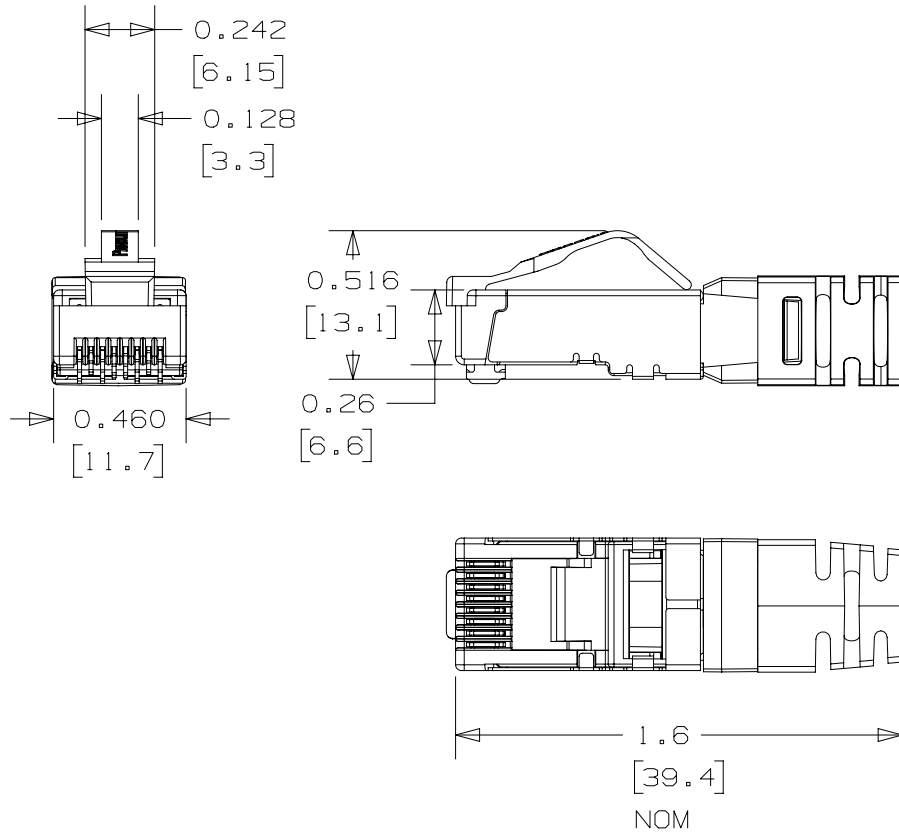

PART NUMBER		SPS626 - C		
TITLE		26 AWG CATEGORY 5e/6 SHIELDED MODULAR PLUG		
ITEM REVISION NAME		CUSTOMER DRAWING		
DATASET FILE NAME		00453NAA/00		
		00453NAA_DC/00A		
MATERIAL		THIRD ANGLE PROJECTION		
DRAWING NUMBER		00453NAA - DC		
SEE NOTE 4		SHEET 1 OF 1		
REV	DATE	BY	CHK	APR
R	10-5-17	BJN	BSN	TMBA
RELEASED TO PRODUCTION				
XXXXXXX				
DESCRIPTION		ECN		
DRAWN BY		DATE	CHK	SCALE
BJN		10-5-17	BSN	NONE
SIZE		A		

A-SIZE CUSTOMER

2

1

2

1