



2

1


PANDUIT P/N	WEIGHT
P30B06M	5.5kg

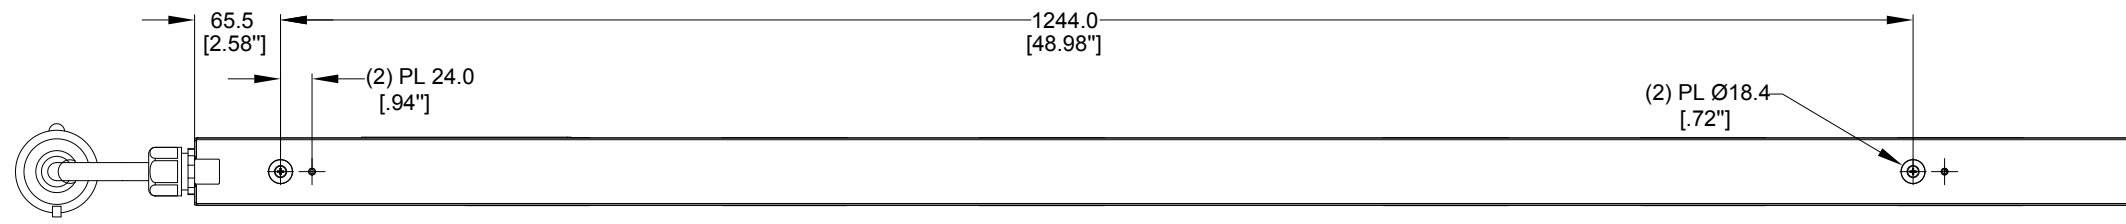

REAR VIEW

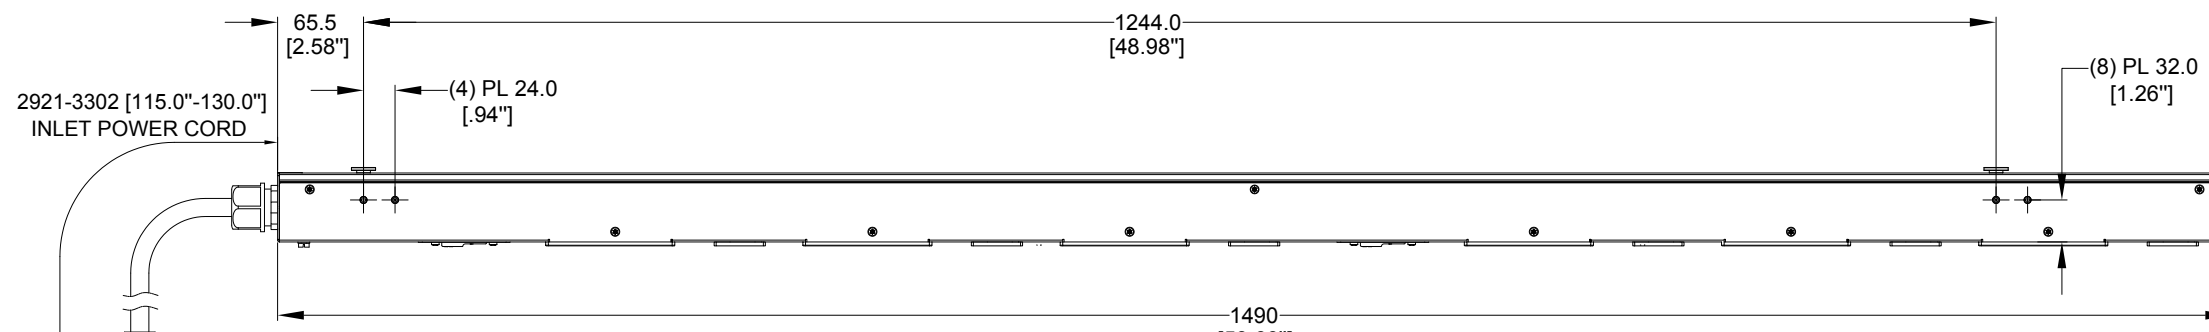

TOP VIEW

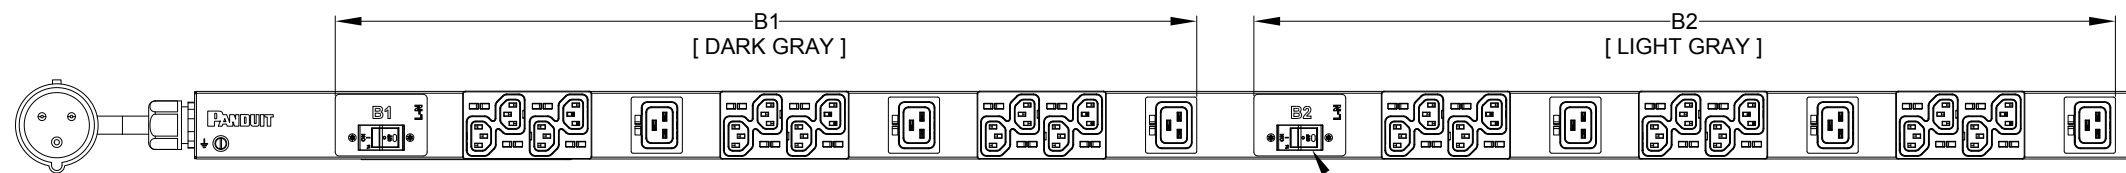


FRONT VIEW

16 A, SINGLE - POLE ELECTRO-MECHANICAL SWITCH / BREAKER (2) PLACES

NOTES:

- IDENTIFICATION:
  - UNIT TYPE: BASIC
  - ORIENTATION: VERTICAL, MID
  - OUTLET QTY&TYPE: (24)C13, (6)C19
  - BREAKER QTY&TYPE: (2) 16A, SINGLE-POLE
  - INPUT VOLTAGE: 200-240VAC
  - INPUT CURRENT: 32A
  - INPUT PHASE: SINGLE-PHASE
  - RATED POWER: 7.4kVA
  - INPUT PLUG: IEC 60309 2P+E 6H 32A
  - INPUT CORD LENGTH: 3m [10']
- ACCESSORIES:
  - POCKET GUIDE
- RoHS COMPLIANT
- VISIT PANDUIT'S ON-LINE CATALOG AT [WWW.PANDUIT.COM](http://WWW.PANDUIT.COM) FOR ADDITIONAL PRODUCT INFORMATION CONTAINED IN THE SPECIFICATION SHEET AS WELL AS A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
- MAXIMUM ALLOWABLE INPUT POWER = 7.4kW
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES

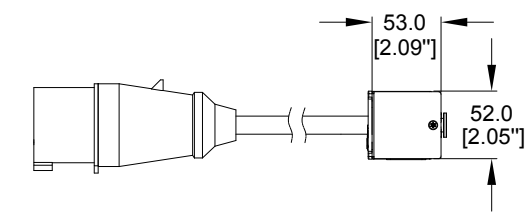

SIDE VIEW

B

B

A

A

PLUG  
32 AMP, 250V  
2P/3W  
IEC 60309, SPLASHPROOF IP44  
3J (S); 3U (W), 6H

SIX (6)  
RECEPTACLES  
16 AMP, 250V  
STRAIGHT BLADE  
IEC 60320 / C19

TWENTY-FOUR (24)  
RECEPTACLES  
10 AMP, 250V  
STRAIGHT BLADE  
IEC 60320 / C13

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
01B	08/21/2017	DI.ZHAI	MIM	EDM	REVISED TOLERANCES	P30B06M
01A	06/28/2017	DI.ZHAI	MIM	EDM	INITIAL RELEASE	P30B06M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY

SIGN	
DATE	
PRINT	

TITLE: BASIC SERIES PDU  
P30B06M  
CUSTOMER DRAWING

ITEM REVISION NAME:

DATASHEET FILE NAME:

UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]

Tolerance(mm)	
0<L<50	±0.5
50<L<250	±1.0
250<L<500	±1.5
500<L<1000	±2.5
1000<L<2000	±4.0

MATERIAL/COLOR: N/A

DRAWING NUMBER: P30B06M\_DC

DRAWN BY: DI.ZHAI | DATE: 05/24/2017 | CHK: SEAN | SCALE: NONE

SHT 1 OF 1 | SCALE: B

2

1

