


### ELECTRICAL CHARACTERISTICS

NOMINAL VOLTAGE	1,5 V
NOMINAL CAPACITY	350 Ah
NOMINAL ENERGY	455 Wh
MAXIMUM CONTINUOUS AVERAGE CURRENT	200 mA
MAXIMUM INTERMITTENT DISCHARGE CURRENT (Discharge rate < 1')	800 mA
MAXIMUM PULSE DISCHARGE CURRENT (Discharge rate < 1'')	1600 mA
MAXIMUM CAPACITY USABLE PER HOUR FOR INTERMITTENT AND PULSE DISCHARGE	150 mAh

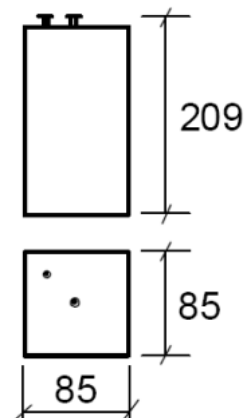

### PHYSICAL CHARACTERISTICS

DIMENSIONS	
Length	85 mm
Width	85 mm
Height	188/209 mm
NET WEIGHT	1,50 Kg
VOLUME	1,37 dm <sup>3</sup>
CASE MATERIAL	Plastic*
TERMINALS	Nº 2
GUARANTEED SHELF LIFE	2 YEARS
MERCURY CONTENT	None
CADMIUM CONTENT	None


CAPACITY				
USE	CONDICIONES			MINIMUM AVERAGE CAPACITY (Ah)
	Resistance (Ω)	Daily period	End Point (V)	
FAST	10	24 H	0,9	339
NORMAL	20	14 H	0,9	339

- High impact polystyrene.

**TYPICAL HEAVY SERVICE DISCHARGE / COURBE DE DÉCHARGE POUR RÉGIME FORT**

10 Ω - 24 HOURS / DAY - CUT OFF 0,9 VOLTS


10 Ω - 24 HEURES / JOUR - TENSION D'ARRÊT 0,9 VOLTS

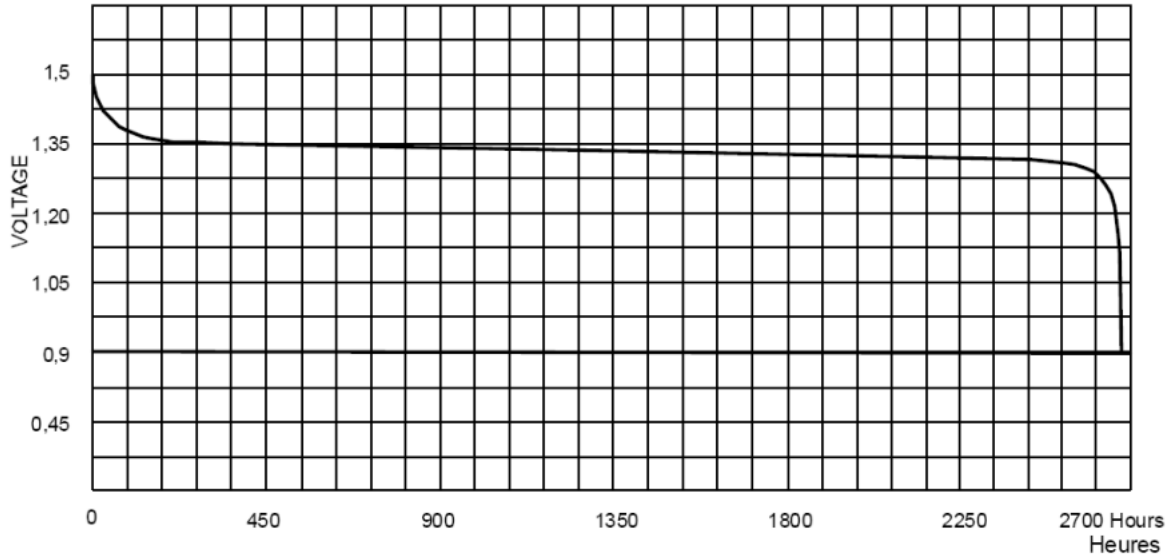


**TYPICAL LIGHT SERVICE DISCHARGE / COURBE DE DÉCHARGE POUR RÉGIME LENT**

20 Ω - 14 HOURS / DAY - CUT OFF 0,9 VOLTS

20 Ω - 14 HEURES / JOUR - TENSION D'ARRÊT 0,9 VOLTS

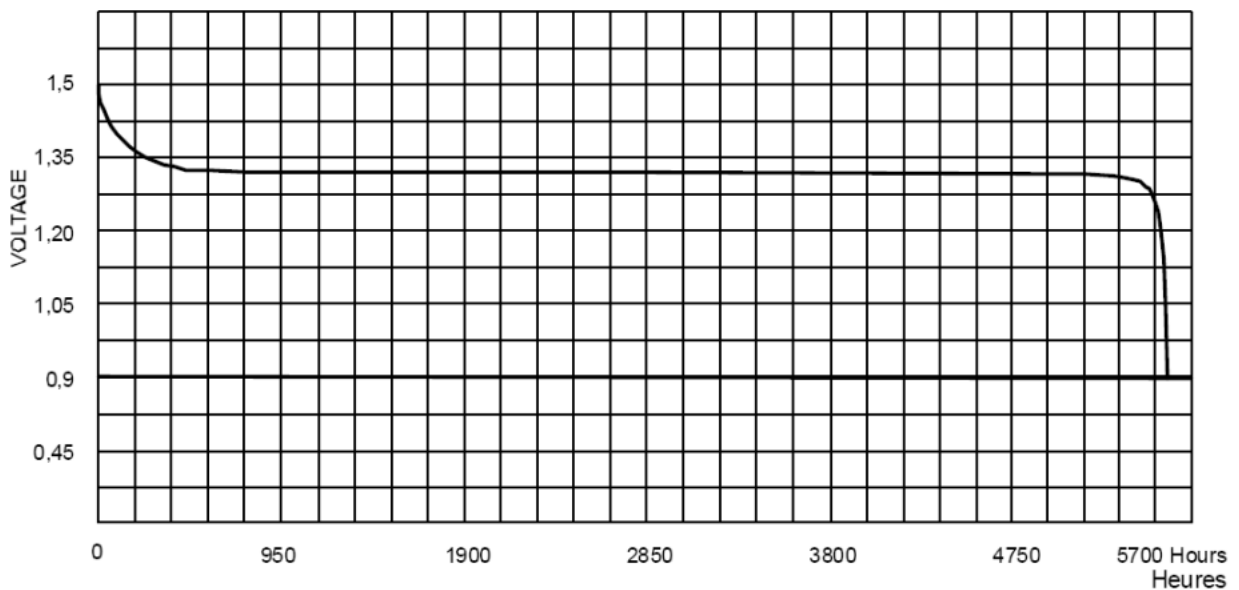

CAPACITY AS A FUNCTION OF TEMPERATURE AND DUTY  
CAPACITÉ EN FONCTION DE LA TEMPÉRATURE ET DU RÉGIME

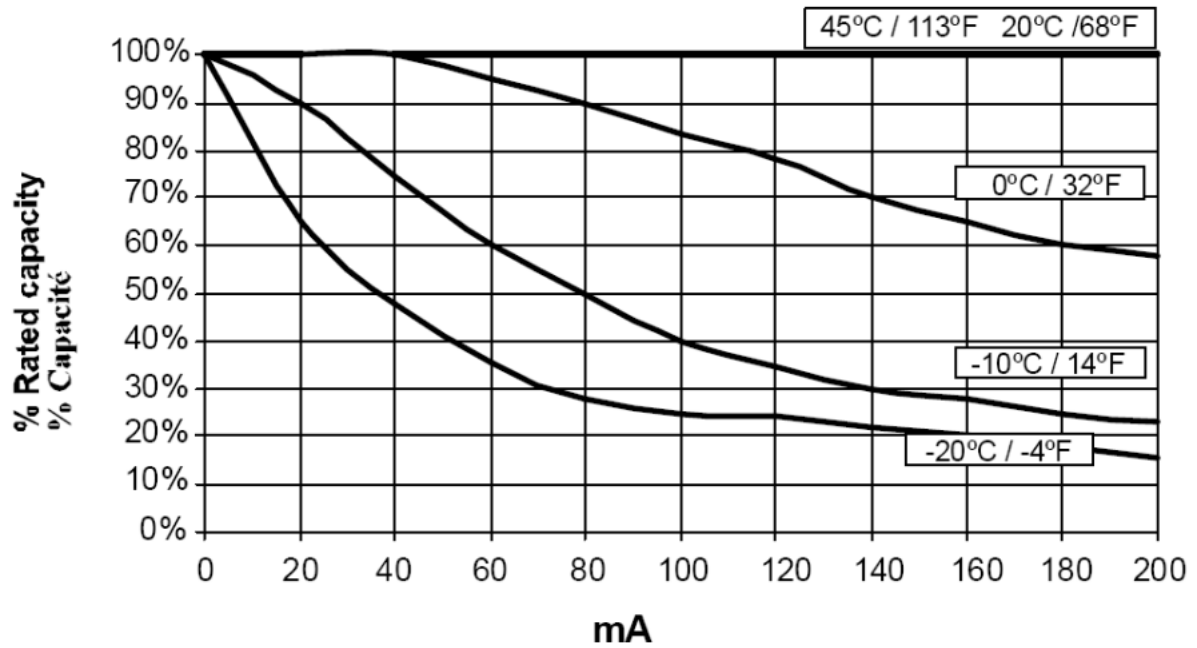

CAPACITY AS A FUNCTION OF SHELF LIFE  
CAPACITÉ EN FONCTION DE LA CONSERVATION

YEARS ANNÉES	CAPACITY CAPACITÉ Ah
1	332
2	322