

1SNA299683R0100 ✓ ACTIVE

ENTRELEC | ENTRELEC SNA

TE Internal #: 1SNA299683R0100

Modular Terminal Blocks, Feed-Through, Screw Clamp Terminal Block, Green & Yellow, Product Spacing .235 in [6 mm], 6 Position, ENTRELEC SNA

[View on TE.com >](#)



Connectors > Terminal Blocks & Strips > Modular Terminal Blocks



Block Function: **Feed-Through**

Modular Terminal Block Product Type: **Screw Clamp Terminal Block**

Rated Cross Section: **4 mm²**

Primary Product Color: **Green & Yellow**

Features

Product Type Features

Modular Terminal Block Product Type	Screw Clamp Terminal Block
-------------------------------------	----------------------------

Configuration Features

Gauge Type	A4
Number of Levels	3
Number of Poles	6
Number of Circuits	3
Block Function	Feed-Through
Number of Positions	6

Electrical Characteristics

Operating Voltage Rating (UL & CSA) (Max) - Main Circuit	300 V
Impulse Withstanding Voltage Rating (IEC)	6000 V
Short-Time Withstanding Current Rating @ 1s	480 A
Voltage Rating (IEC)	500 V
Current Rating (UL)	20 A
Current Rating (IEC)	32 A

Voltage Rating	500 VAC
----------------	---------

Body Features

Product Weight	27 g[.952 oz]
Primary Product Color	Green & Yellow

Termination Features

Termination Method to Wire & Cable	Screw Terminal
------------------------------------	----------------

Mechanical Attachment

DIN Rail Mounting Type	G32, TH35-15, TH35-7.5
Tightening Torque	4.4 in-lbs
Connector Mounting Type	DIN Rail

Housing Features

Housing Material	Polyamide 6.6
------------------	---------------

Dimensions

Main Circuit Capacity - 1 Rigid Stranded Conductor per Screw Clamp	.2 – 4 mm ²
Wire Stripping Length	9.5 mm[.374 in]
Main Circuit Capacity - 1 Flexible Conductor per Spring Clamp	.22 – 4 mm ²
Tool Size	4 mm[.157 in]
Product Depth	64.5 mm
Product Width	6 mm[.235 in]
Product Length	64.5 mm
Product Height	90 mm
Rated Cross Section	4 mm ²
Product Spacing	6 mm[.235 in]
Wire Size	4 mm ²

Usage Conditions

Storage Temperature Range	-55 – 110 °C[-67 – 230 °F]
Installation Temperature Range	-5 – 40 °C[23 – 104 °F]
Operating Temperature Range	-55 – 110 °C[-67 – 230 °F]

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards



IP Rating	IP20
UL Flammability Rating	UL 94V-0

Product Compliance




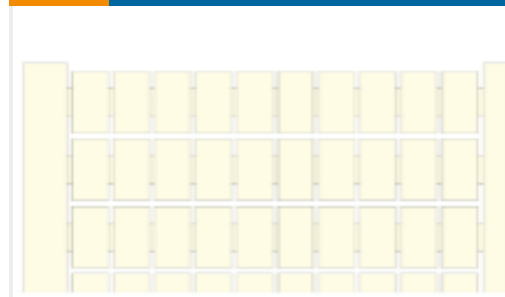
[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

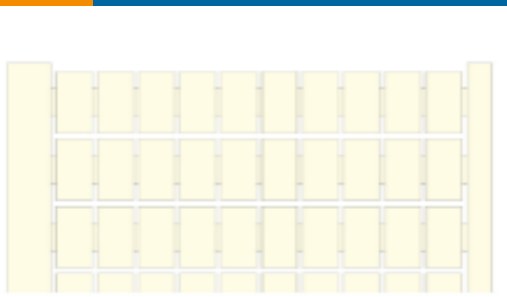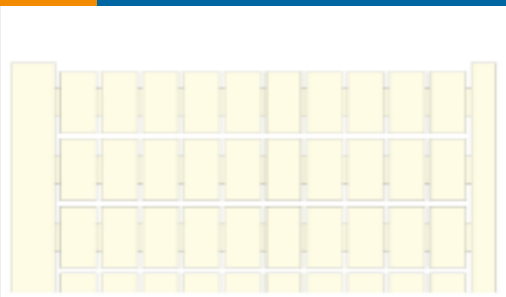 <p>TE Part # 1SNA103775R0000 RC65-BL</p>	 <p>TE Part # 1SNA103776R0100 RC65-RD</p>	 <p>TE Part # 1SNA163311R2200 PC61-10</p>	 <p>TE Part # 1SNA232000R0000 RC65</p>
--	---	--	---

TE Part # 1SNA007865R2600
FC2

TE Part # 1SNA103189R2600
SCD

TE Part # 1SNA114205R2000
AD2.5

TE Part # 1SNA116900R2700
BADH

TE Part # 1SNA167319R0600
AL2

TE Part # 1SNA173217R2600
BJM62



TE Part # 1SNA173218R0700
BJM62




TE Part # 1SNA173219R0000
BJM62



TE Part # 1SNA173221R2200
BJM62



TE Part # 1SNA173226R2700
BJM62

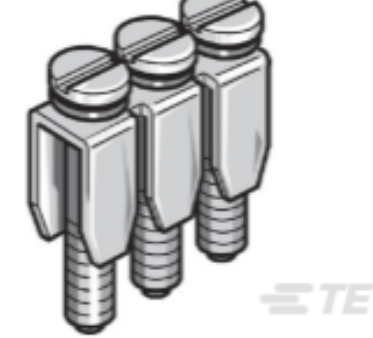

TE Part # 1SNA174112R1600
BJM62



TE Part # 1SNA174113R1700
BJM62



TE Part # 1SNA174114R1000
BJM62




TE Part # 1SNA174115R1100
BJM62

Also in the Series | **ENTRELEC SNA**



Modular Terminal Blocks(182)



Terminal Block & Strip Conducting Accessories(26)



Terminal Block & Strip Insulating Accessories(14)

Customers Also Bought



TE Part #M3041-000005-05KPG
PRESS XDCR M3041-000005-05KPG



TE Part #5-1618388-8
LEV200A6NAA=RELAY, SPST-NO



TE Part #1SNK900001R0000
BAM4




TE Part #1SNA115116R0700
M4/6




TE Part #1SNA115271R2200
M4/6.D2



TE Part #1SNA115561R1500
M4/6.D2.SNBT

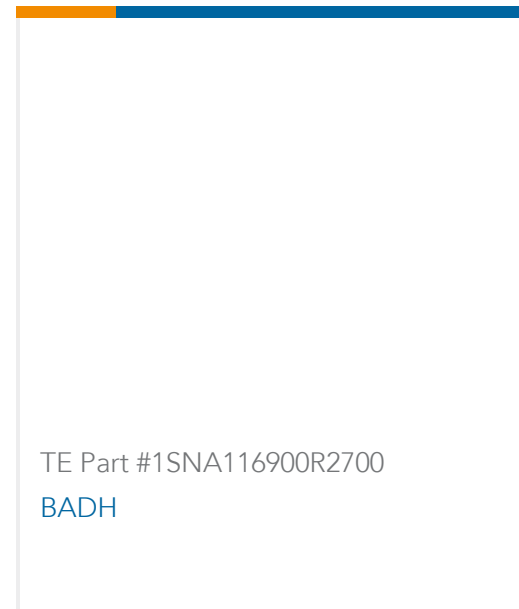


TE Part #1SNA116900R2700
BADH

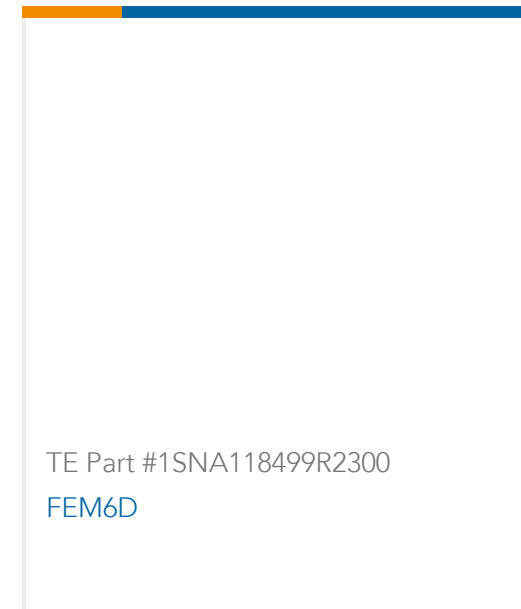

TE Part #1SNA118499R2300
FEM6D



TE Part #1SNA176673R0200
BJM18-10

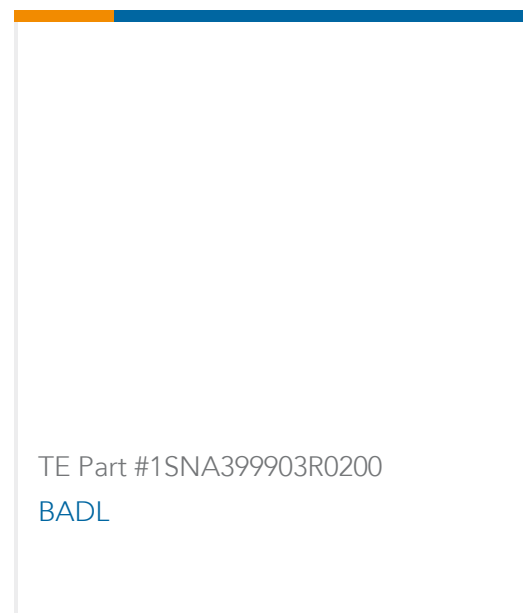

TE Part #1SNA399903R0200
BADL

Documents

CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_1SNA299683R0100_A.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1SNA299683R0100_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1SNA299683R0100_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[Catalogue - ENTRELEC terminal-blocks-sna-series](#)

English

[D4/6.T3](#)

English

1SNA299683R0100

Modular Terminal Blocks, Feed-Through, Screw Clamp Terminal Block, Green & Yellow, Product Spacing .235 in [6 mm], 6 Position, ENTRELEC SNA



ENTRELEC Terminal Blocks Catalogue (RUS)