



Product designation **SOCKET**
Product type designation **HR1XS110S**

Contact characteristics

| | | |
|---|----|-----|
| Rated insulation voltage U_i IEC/EN | V | 250 |
| Rated impulse withstand voltage U_{imp} | kV | 4 |

Coil characteristics

| | | |
|--------------------------------|---|---------------------|
| Relay control voltage + socket | V | 110... 125VAC/DC |
|--------------------------------|---|---------------------|


Mechanical features

Socket screw tightening tool (cross / flat blade) **Phillips 0/3.5mm**


| | | | |
|-------------------|-----------|-----|---------------------|
| Conductor section | | | |
| | AWG/Kcmil | min | 20 |
| | | max | 16 |
| | IEC | min | mm ² 0.5 |
| | | max | mm ² 1.5 |

Fixing **On 35mm DIN rail**

Dimensions

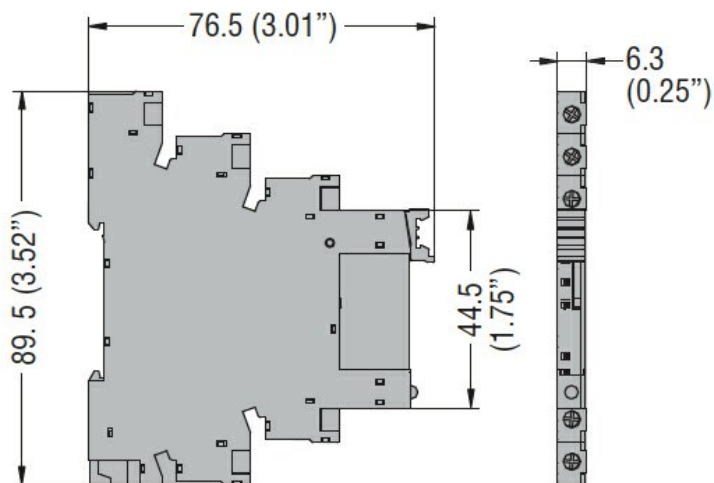

Wiring diagrams

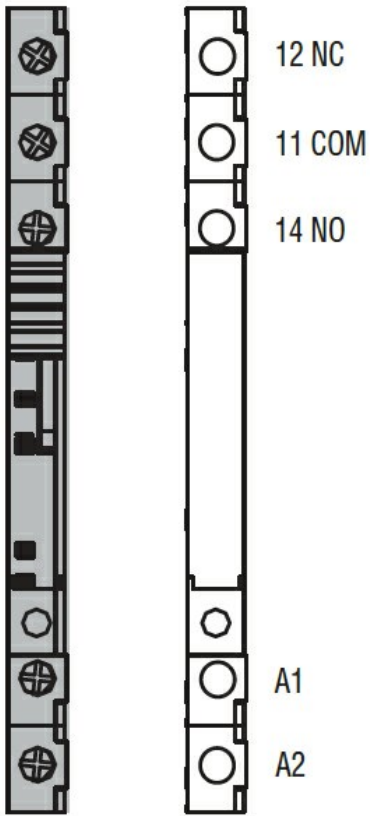

Certifications and compliance

Compliance

IEC/EN 61810

Certificates

CSA

cURus

EAC

ETIM classification

ETIM 8.0

EC001456 -
 Relay socket