

CHARTRES LED HF DETECTION



VANDAL PROOF | POLYCARBONATE : DIFFUSER & SKIRT ALUMINIUM SKIRT- POLYCARBONATE DIFFUSER

CLASS II 960°C/5 sec.

Safety
for luminaires
and people

Technical Data


Class II • IP 55 • IK 10 vandal proof • 50/60HZ • Detection with 5,8 Hz Hyper Frequency radar + standby pre-warning + automatic switch-off • Detection at 100% luminous flux • Standby at 10% luminous flux (low consumption energy) • Radar fitted with luminosity cell pre-adjusted: 1250 lux • All parameters can be adjusted with configuration tool code 201024 • Possibility of configuration in Master and slaves system: maximum 30 LED bulkheads per line.




MADE IN FRANCE





714 703 - LED - DETECTION - VANDAL PROOF



LED	Number of LED	LED colour	Flux (Lm)	Power	Shape/Size	White	Black	Grey	White	Black	Grey
						Polycarbonate skirt/polycarbonate diffuser			Aluminium skirt/polycarbonate diffuser		
						714 703	714 713	714 723	615 703	615 713	615 723
⊗ x 12	4000K	830	18 W	⊗ S1	714 703	714 713	714 723	615 703	615 713	615 723	
⊗ x 12	6500K	960	18 W	⊗ S1	714 503	714 513	714 523	615 503	615 513	615 523	
⊗ x 18	4000K	1420	27 W	⊗ S2	724 703	724 713	724 723	625 703	625 713	625 723	
⊗ x 18	6500K	1640	27 W	⊗ S2	724 503	724 513	724 523	625 503	625 513	625 523	



615 723

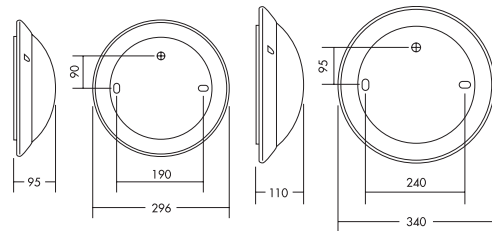

724 503

Ligthing study

Eg with 4 Round Chartres LED Ø 340 l
Ceiling mounting in a corridor - 18 LED

