




Product designation	Power distribution block	
Electrical features		
Number of poles		4
Rated insulation voltage U_i	V	500
IEC Conventional free air thermal current I_{th}	A	160
Rated peak withstand current I_{pk}	kA	38
Rated short time current I_{cw} 60s	A	8.2
Connections		
Terminal hole diameter_Option 1	mm	1x11.5mm
Conductor section connectable_Option 1	mm ²	10...50
Terminal hole diameter_Option 2	mm	3x8.5mm
Conductor section connectable_Option 2	mm ²	10...25
Terminal hole diameter_Option 3	mm	8x7mm
Conductor section connectable_Option 3	mm ²	2.5...16
Mechanical features		
Operating position	normal allowable	Vertical plane Any
Fixing		Screw / DIN rail 35mm
Phillips		2
Weight	g	615
Resistance & Protection		
Terminals IP degree		IP20 front
Dimensions		

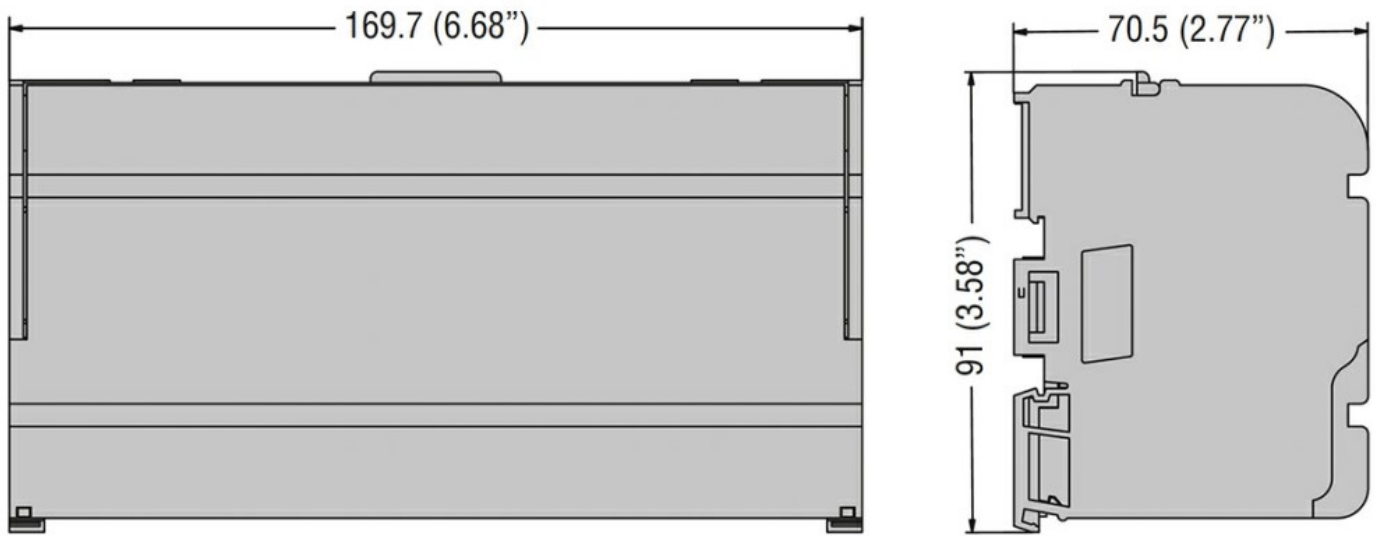

Certifications and compliance

Certifications

IEC/EN/BS 60947-7-1

ETIM classification

EC000066 - Power contactor, AC switching

□