

DC MCBs Ex9BP up to 1000 V DC




- DC Miniature Circuit Breakers
- Non-polarized, suitable for photovoltaic applications
- Tested according to IEC/EN 60947-2
- Rated short circuit breaking capacity I_{cu} 6 kA
- Rated operating voltage U_e of 250 V DC per pole
- Width 2 and 4 modules
- Tripping characteristics C, K
- Rated current up to 63A
- Wide range of accessories

DC miniature circuit breakers Ex9BP are designed for direct current applications. Thanks to their polarity independency are suitable for photovoltaic applications.

It can be combined with wide range of accessories including auxiliary and signal contacts, shunt trip release and undervoltage release. It is possible to create diversified combination of accessories. These combinations are only limited by total number, not by the type of accessories - all components fit together. It can be used up to three units of auxiliary or alarm contacts plus up to two units for release units.

Type Key

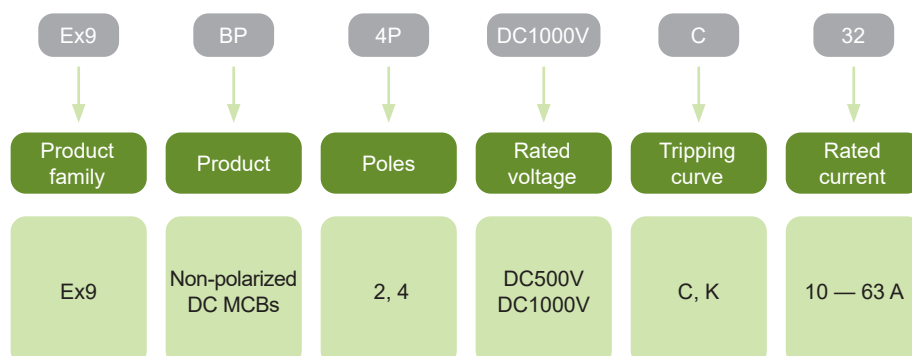

Certification marks



DC MCBs Ex9BP up to 1000 V DC

Accessories



Aux. or signal contacts
AX, AL, AXL
Up to 3 units

Voltage or trip releases
SHT, UVT
Up to 2 units

Miniature Circuit Breaker
Ex9BP
2, 4-module width

Auxiliary contacts AX31

Alarm contact AL3

Auxiliary and alarm contact AXL31

Shunt trip releases SHT31

Undervoltage releases UVT31

All accessories are mounted to the MCBs Ex9BP from the left. The undervoltage release UVT in PV system is intended e.g. for safe remote disconnection of DC part from installation.

DC MCBs Ex9BP up to 1000 V DC

C-Characteristic, 2-module, 500 V DC



Rated current	Width	Char.	Article No.	Type	Packing
10A	2MU	C	111559	Ex9BP 2P DC500V C10	1/6/72
13A	2MU	C	111560	Ex9BP 2P DC500V C13	1/6/72
16A	2MU	C	111561	Ex9BP 2P DC500V C16	1/6/72
20A	2MU	C	111562	Ex9BP 2P DC500V C20	1/6/72
25A	2MU	C	111563	Ex9BP 2P DC500V C25	1/6/72
32A	2MU	C	111564	Ex9BP 2P DC500V C32	1/6/72
40A	2MU	C	111565	Ex9BP 2P DC500V C40	1/6/72
50A	2MU	C	111566	Ex9BP 2P DC500V C50	1/6/72
63A	2MU	C	111567	Ex9BP 2P DC500V C63	1/6/72

C-Characteristic, 4-module, 1000 V DC



Rated current	Width	Char.	Article No.	Type	Packing
10A	4MU	C	111568	Ex9BP 4P DC1000V C10	1/3/36
13A	4MU	C	111569	Ex9BP 4P DC1000V C13	1/3/36
16A	4MU	C	111570	Ex9BP 4P DC1000V C16	1/3/36
20A	4MU	C	111571	Ex9BP 4P DC1000V C20	1/3/36
25A	4MU	C	111572	Ex9BP 4P DC1000V C25	1/3/36
32A	4MU	C	111573	Ex9BP 4P DC1000V C32	1/3/36
40A	4MU	C	111574	Ex9BP 4P DC1000V C40	1/3/36
50A	4MU	C	111575	Ex9BP 4P DC1000V C50	1/3/36
63A	4MU	C	111576	Ex9BP 4P DC1000V C63	1/3/36

K-Characteristic, 2-module, 500 V DC



Rated current	Width	Char.	Article No.	Type	Packing
10A	2MU	K	111577	Ex9BP 2P DC500V K10	1/6/72
13A	2MU	K	111578	Ex9BP 2P DC500V K13	1/6/72
16A	2MU	K	111579	Ex9BP 2P DC500V K16	1/6/72
20A	2MU	K	111580	Ex9BP 2P DC500V K20	1/6/72
25A	2MU	K	111581	Ex9BP 2P DC500V K25	1/6/72
32A	2MU	K	111582	Ex9BP 2P DC500V K32	1/6/72
40A	2MU	K	111583	Ex9BP 2P DC500V K40	1/6/72
50A	2MU	K	111584	Ex9BP 2P DC500V K50	1/6/72
63A	2MU	K	111585	Ex9BP 2P DC500V K63	1/6/72

K-Characteristic, 4-module, 1000 V DC



Rated current	Width	Char.	Article No.	Type	Packing
10A	4MU	K	111586	Ex9BP 4P DC1000V K10	1/3/36
13A	4MU	K	111587	Ex9BP 4P DC1000V K13	1/3/36
16A	4MU	K	111588	Ex9BP 4P DC1000V K16	1/3/36
20A	4MU	K	111589	Ex9BP 4P DC1000V K20	1/3/36
25A	4MU	K	111590	Ex9BP 4P DC1000V K25	1/3/36
32A	4MU	K	111591	Ex9BP 4P DC1000V K32	1/3/36
40A	4MU	K	111592	Ex9BP 4P DC1000V K40	1/3/36
50A	4MU	K	111593	Ex9BP 4P DC1000V K50	1/3/36
63A	4MU	K	111594	Ex9BP 4P DC1000V K63	1/3/36

Technical Data Ex9BP up to 1000 V DC

DC Miniature Circuit Breakers up to 1000 V DC

General parameters

Non-polarized, suitable for general DC as well as Photovoltaic applications

Accessories

Auxiliary contacts	AX3111, AX3122	100540, 100542
Alarm contact	AL3111	100541
Auxiliary and alarm contact	AXL31	100543
Shunt trip releases	SHT31, SHT3111	100544-100546, 100547-100549
Undervoltage releases	UVT31, UVT3101, UVT3110	100550-100551, 100552-100553, 100554-100555
Max. number of installed accessories is 3 pcs of one contact units (AX3111, AL3111) or 2 pcs of two contact units (AX3122, AXL31) and 2 pcs of releases (SHT31, UVT31)		

Electrical parameters

Tested according to	IEC/EN 60947-2
Rated operating voltage U_e	500 (2P), 1000 (4P) V DC
Rated breaking capacity I_{cu}	6 kA
Rated current I_n	10 — 63 A
Tripping characteristics	C, K
Rated impulse withstand voltage U_{imp}	4 kV (2P), 6 kV (4P)
Rated insulation voltage U_i	1 000 V DC
Electrical service life	300 operation cycles
Line voltage connection	arbitrary above or below


Mechanical parameters

Device width	18 mm (per pole/module)
Device height	83 mm (89 mm including rail clip)
Frame size	45 mm
Mounting	easy fastening onto 35 mm device rail (DIN)
Degree of protection	IP20 terminals
Terminals	combined lift + open mouthed
Terminal capacity	1 — 35 mm ²
Fastening torque of terminals	3.5 Nm
Busbar thickness	0.8 — 2 mm
Mechanical service life	20 000 operation cycles
Ambient temperature	-35 — +70 °C
Altitude	≤ 2 000 m
Relative humidity	≤ 95 % at 20°C, ≤ 50 % at 40°C
Resistance to humidity and heat	class 2
Pollution degree	3
Installation class	III
Weight	0.12 kg (per pole/module)


Technical Data Ex9BP up to 1000 V DC

DC Miniature Circuit Breakers up to 1000 V DC


Dimensions

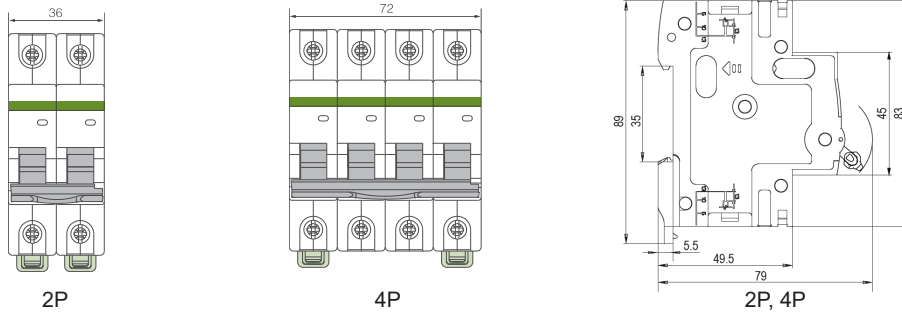

Wiring diagrams

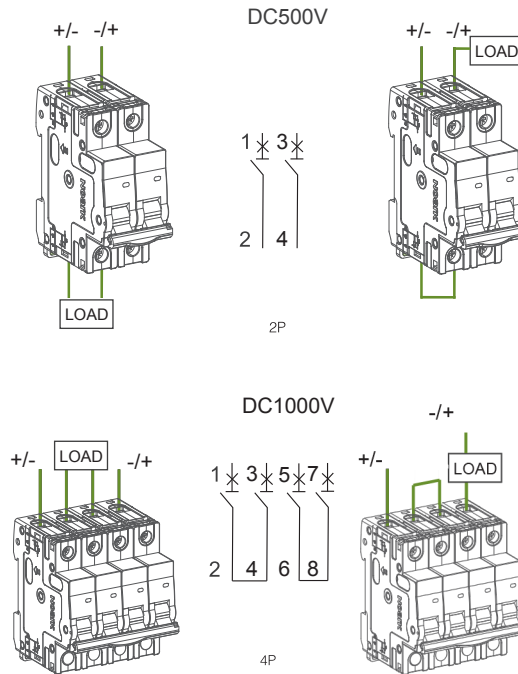

Tripping characteristics

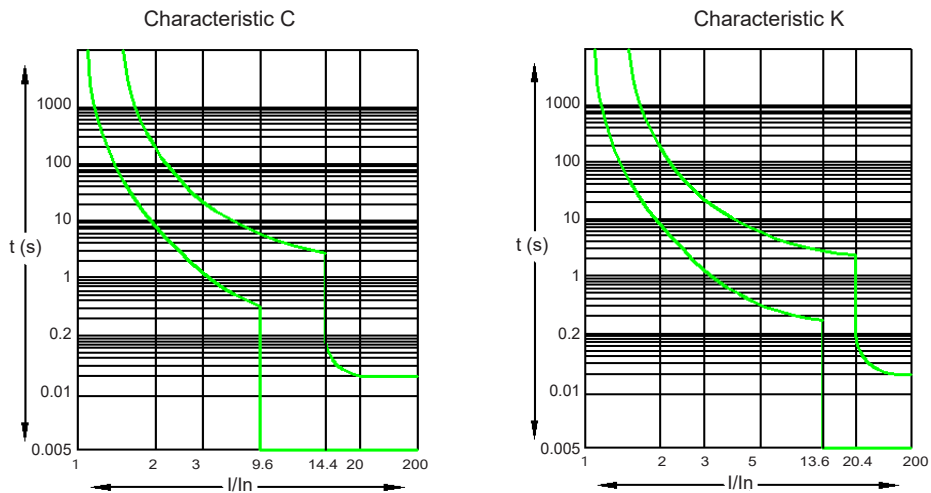

Technical Data Ex9BP up to 1000 V DC

DC Miniature Circuit Breakers up to 1000 V DC

Dependence of tripping characteristics on ambient temperature

T [°C]	I _n (T) [A]								
	10 A	13 A	16 A	20 A	25 A	32 A	40 A	50 A	63 A
-20	13.5	16.3	20.0	24.5	29.8	39.5	50.5	60.0	77.5
-15	13.3	15.9	19.8	24.3	29.7	39.3	50.4	59.8	76.3
-10	13.0	15.7	19.5	24.0	29.5	39.0	50.2	59.5	75.0
-5	12.7	15.4	19.2	23.8	29.3	38.8	50.0	59.2	73.0
0	12.5	15	19.1	23.7	29.2	38.6	48.8	59.0	71.8
5	12.3	14.7	18.8	23.5	29.0	38.4	48.6	58.8	70.6
10	12.1	14.3	18.6	23.3	28.8	38.2	48.4	56.5	69.0
15	12.0	14	18.5	23.1	28.6	38.0	48.1	55.0	67.5
20	11.8	13.7	18.3	22.8	28.4	37.8	47.8	54.5	66.2
25	11.5	13.4	18.0	22.6	28.2	37.5	47.0	52.5	64.5
30	10	13	16	20	25	32	40	50	63
35	9.9	12.8	15.7	19.7	24.6	31.5	39.2	48.8	61.5
40	9.8	12.5	15.4	19.3	24.3	31.1	38.8	47.0	58.7
45	9.8	12.2	15.1	18.8	24.0	30.8	38.3	45.5	55.8
50	9.6	12	14.9	18.5	23.8	30.1	38.0	44.0	53.5
55	9.5	11.7	14.7	18.2	23.5	29.5	36.5	42.5	51.7
60	9.0	11.5	14.5	17.8	23.0	28.5	35.0	41.5	49.2
65	8.6	11.2	14.0	17.5	22.0	27.5	34.0	40.5	47.9
70	8.0	11	13.8	17.3	21.5	27.0	32.5	38.0	46.8

Power loss per pole

I _n [A]	10 A	13 A	16 A	20 A	25 A	32 A	40 A	50 A	63 A
P [W]	1.8	3.1	3.1	3.1	3.9	3.9	4.7	4.7	6.2