

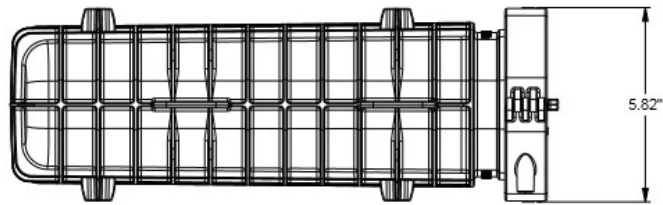


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
OFCD1610BR	8.0 LB (3.63 kg)

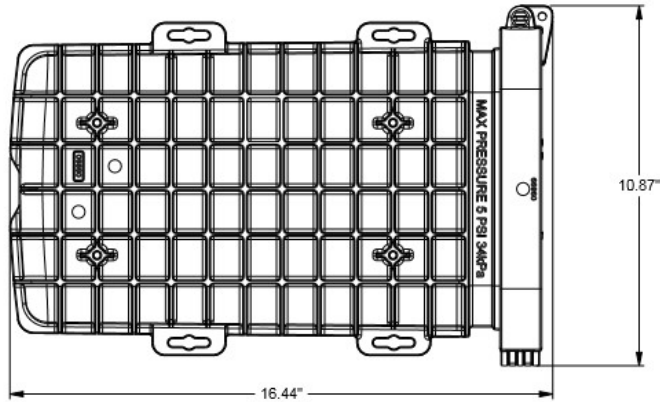

NOTES:

- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A LIST OF CURRENT PARTS APPLICABLE FOR USE WITH THIS PRODUCT.
- PART FEATURES:
 - Max. Splice Capacity: 120 Single Fiber or 288 Ribbon Fiber Fusion Splices
 - Application: Direct buried or below grade.
 - Internal organizer manages buffer tube or ribbon
 - Factory installed gasket allows re-entry and re-use
 - Grommet Kit included with (3) grommets
 - (2) 2-Hole 0.42"-0.60" Grommet
 - (1) 6-Hole 0.125"-0.250" Grommet
 - Flexible grommet sealing technology supports a wide range and quantity of flat or round cable profiles
 - Tested in accordance to GR-771-CORE by an independent outside lab
 - Integrated air valve to confirm seal integrity
 - Quick to assemble, no special tools required
 - Flat shape allows for mounting in small areas
 - Supports single fusion, mass fusion, mechanical, PLC splitters or a combination of all within one closure
- Splice tray sold separately.

TITLE										OUTDOOR ONE DOME CLOSURE (16X10)						
										CUSTOMER DRAWING						
ITEM REVISION NAME										00271CCB/00						
DATASET FILE NAME										00271CCB_DC/00A						
										THIRD ANGLE PROJECTION						
MATERIAL										N/A						
										DRAWING NUMBER						
										00271CCB-DC						
00A	11/12/19	JBO	TMSE	ASY	INITIAL RELEASE					00271CCB						
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN				DRAWN BY	DATE	CHK	SCALE	SHEET 1 OF 1		SIZE
										JBO	11/12/19	TMSE	NONE			A

A-SIZE CUSTOMER

2

1

2

1