


Schémas et cotes (mm)


TerCia CLS-C45

colonnes à clipsage direct 45*


Simple face
B45310, B45312, B45314, B45311,
B45313, B45315




Double face
B45320, B45321, B45322, B45323,
B45324, B45325




Montage colerette




Liaisons de masse




Fixation



Montage cloison




Hauteurs Min-Max

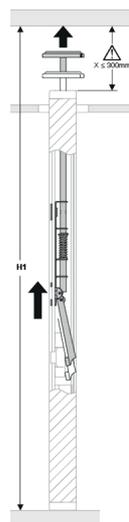

Réf.	H1 (mm)		H2 (mm)
	Min	Max	Max
B45310			
B45311			
B45320	2700	3000	2635
B45321			
B45312			
B45313	3000	3300	2935
B45322			
B45323			
B45314			
B45315	3300	3600	3235
B45324			
B45325			

JCA45U

Jonction couvercle appareillage



Capacité maximale théorique en câbles⁽¹⁾



Section (mm ²)	A		B		C
	A	B	A	B	C
n.câbles Ø 11	3	3	4	4	14
n. câbles Ø 7	3	3	9	9	30

⁽¹⁾ Attention : le nombre de conducteurs calculé correspond à une valeur optimisée, sans tenir compte du croisement des câbles à l'intérieur du conduit, ni du coefficient de foisonnement.

* Colonnes vendues non équipées



Contact
Tel. 01 44 77 55 11
info@iboco.fr