


LED ceiling-recessed luminaire

Uniform light surface. Product height of only 12 mm: fits various ceiling types. Replaces conventional downlights with 1 x 18 W CFL and offers up to 50 % energy saving. External connector box for easy and quick installation. E3 emergency kit available as accessory.


Body: Aluminum, white finish (RAL9003)

Diffuser: Polystyrol

Weight: 0.20 kg

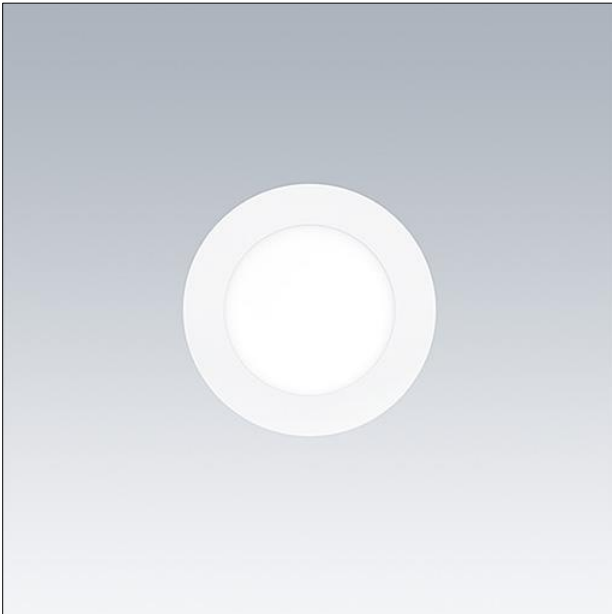


TE_ZOE_F_120.jpg

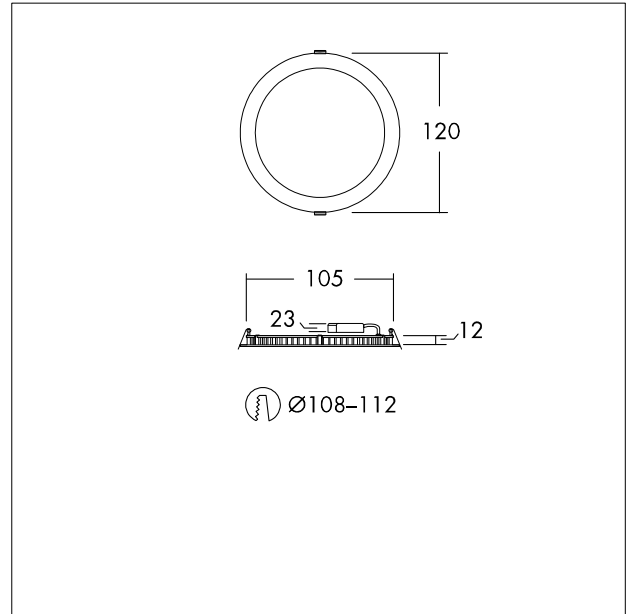

TE_ZOEL_M_120mm.wmf

Light Distribution

STD - standard

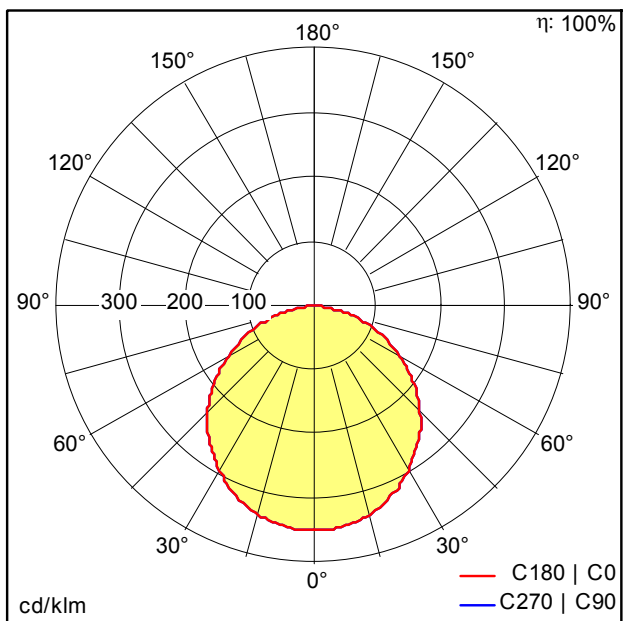

TE_ZOE_LED_DL_110_600_840.ltd

- Light Source: LED
- Luminaire luminous flux*: 601 lm
- Luminaire efficacy*: 75 lm/W
- Colour Rendering Index min.: 80
- Correlated colour temperature*: 4000 Kelvin
- Chromaticity tolerance (initial MacAdam)*: 4
- Rated median useful life*: 35000h L70 at 25°C
- Ballast: 1x LED_Con
- Luminaire input power*: 8 W $\Lambda = 0.7$
- Dimming: Fixed output