



| | | | | |
|---|--------------------|----|------|-----------------|
| Product designation | | | | Power contactor |
| Product type designation | | | | BF25 |
| Contact characteristics | | | | |
| Number of poles | Nr. | | | 3 |
| Rated insulation voltage U _i IEC/EN | V | | | 690 |
| Rated impulse withstand voltage U _{imp} | kV | | | 6 |
| Operational frequency | min | Hz | 25 | |
| | max | Hz | 400 | |
| IEC Conventional free air thermal current I _{th} | A | | | 32 |
| Operational current I _e | AC-1 (≤40°C) | A | 32 | |
| | AC-1 (≤55°C) | A | 26 | |
| | AC-1 (≤70°C) | A | 23 | |
| | AC-3 (≤440V ≤55°C) | A | 25 | |
| | AC-4 (400V) | A | 10 | |
| Rated operational power AC-3 (T≤55°C) | 230V | kW | 7 | |
| | 400V | kW | 12.5 | |
| | 415V | kW | 13.4 | |
| | 440V | kW | 13.4 | |
| | 500V | kW | 15 | |
| | 690V | kW | 11 | |
| Rated operational power AC-1 (T≤40°C) | 230V | kW | 12 | |
| | 400V | kW | 21 | |
| | 500V | kW | 26 | |
| | 690V | kW | 36 | |
| IEC max current I _e in DC1 with L/R ≤ 1ms with 1 poles in series | ≤24V | A | 20 | |
| | 48V | A | 18 | |
| | 75V | A | 18 | |
| | 110V | A | 6 | |
| | 220V | A | - | |
| IEC max current I _e in DC1 with L/R ≤ 1ms with 2 poles in series | ≤24V | A | 23 | |
| | 48V | A | 23 | |
| | 75V | A | 23 | |
| | 110V | A | 16 | |
| | 220V | A | 1 | |
| IEC max current I _e in DC1 with L/R ≤ 1ms with 3 poles in series | ≤24V | A | 23 | |
| | 48V | A | 23 | |
| | 75V | A | 23 | |
| | 110V | A | 18 | |

| | | | |
|--|-----------------|------------------|-----|
| | 220V | A | 12 |
| IEC max current I _e in DC1 with L/R ≤ 1ms with 4 poles in series | ≤24V | A | – |
| | 48V | A | – |
| | 75V | A | – |
| | 110V | A | – |
| | 220V | A | – |
| IEC max current I _e in DC3-DC5 with L/R ≤ 15ms with 1 poles in series | ≤24V | A | 15 |
| | 48V | A | 13 |
| | 75V | A | 13 |
| | 110V | A | 2 |
| | 220V | A | – |
| IEC max current I _e in DC3-DC5 with L/R ≤ 15ms with 2 poles in series | ≤24V | A | 18 |
| | 48V | A | 18 |
| | 75V | A | 16 |
| | 110V | A | 10 |
| | 220V | A | 2 |
| IEC max current I _e in DC3-DC5 with L/R ≤ 15ms with 3 poles in series | ≤24V | A | 22 |
| | 48V | A | 22 |
| | 75V | A | 18 |
| | 110V | A | 15 |
| | 220V | A | 8 |
| IEC max current I _e in DC3-DC5 with L/R ≤ 15ms with 4 poles in series | ≤24V | A | – |
| | 48V | A | – |
| | 75V | A | – |
| | 110V | A | – |
| | 220V | A | – |
| Short-time allowable current for 10s (IEC/EN60947-1) | | A | 200 |
| Protection fuse | gG (IEC) | A | 50 |
| | aM (IEC) | A | 25 |
| Making capacity (RMS value) | | A | 250 |
| Breaking capacity at voltage | 440V | A | 200 |
| | 500V | A | 184 |
| | 690V | A | 102 |
| Resistance per pole (average value) | | mΩ | 2.5 |
| Power dissipation per pole (average value) | I _{th} | W | 2.6 |
| | AC-3 | W | 1.6 |
| Tightening torque for terminals | min | Nm | 1.5 |
| | max | Nm | 1.8 |
| | min | I _{bin} | 1.1 |
| | max | I _{bin} | 1.5 |
| Tightening torque for coil terminal | min | Nm | 0.8 |
| | max | Nm | 1 |
| | min | I _{bin} | 0.8 |

| | | | |
|---|-----|------------------|--------------------------|
| | max | I _{bin} | 0.74 |
| Max number of wires simultaneously connectable | | Nr. | 2 |
| Conductor section | | | |
| AWG/Kcmil | max | | 10 |
| Flexible w/o lug conductor section | min | mm ² | 1 |
| | max | mm ² | 6 |
| Flexible c/w lug conductor section | min | mm ² | 1 |
| | max | mm ² | 4 |
| Flexible with insulated spade lug conductor section | min | mm ² | 1 |
| | max | mm ² | 4 |
| Power terminal protection according to IEC/EN 60529 | | | IP20 when properly wired |

Mechanical features

| | | | |
|-----------------------------|------------------|---|-----------------------|
| Operating position | normal allowable | | Vertical plan ±30° |
| Fixing | | | Screw / DIN rail 35mm |
| Weight | | g | 366 |
| Conductor section | | | |
| AWG/kcmil conductor section | max | | 10 |

Auxiliary contact characteristics

| | | | |
|---------------------------------|------|---|-------------|
| Thermal current I _{th} | | A | 10 |
| IEC/EN 60947-5-1 designation | | | A600 - P600 |
| Operating current AC15 | 230V | A | 3 |
| | 400V | A | 1.9 |
| | 500V | A | 1.4 |
| Operating current DC12 | 110V | A | 5.7 |
| Operating current DC13 | 24V | A | 5.7 |
| | 48V | A | 2.9 |
| | 60V | A | 2.3 |
| | 110V | A | 1.25 |
| | 125V | A | 1.1 |
| | 220V | A | 0.55 |
| | 600V | A | 0.2 |

Operations

| | | |
|-----------------|--------|----------|
| Mechanical life | cycles | 20000000 |
| Electrical life | cycles | 1200000 |


Safety related data

| | | | |
|--|-----------------|--------|----------|
| Performance level B10d according to EN/ISO 13489-1 | rated load | cycles | 1200000 |
| | mechanical load | cycles | 20000000 |
| Mirror contacts according to IEC/EN 60947-4-1 | | | yes |
| EMC compatibility | | | yes |


AC coil operating

| | | |
|--|-------------|------|
| Rated AC voltage at 50/60Hz | V | 48 |
| AC operating voltage | | |
| of 50/60Hz coil powered at 50Hz | | |
| pick-up | min %Us | 80 |
| | max %Us | 110 |
| drop-out | min %Us | 20 |
| | max %Us | 55 |
| of 50/60Hz coil powered at 60Hz | | |
| pick-up | min %Us | 85 |
| | max %Us | 110 |
| drop-out | min %Us | 20 |
| | max %Us | 55 |
| AC average coil consumption at 20°C | | |
| of 50/60Hz coil powered at 50Hz | | |
| | in-rush VA | 75 |
| | holding VA | 9 |
| of 50/60Hz coil powered at 60Hz | | |
| | in-rush VA | 70 |
| | holding VA | 6.5 |
| of 60Hz coil powered at 60Hz | | |
| | in-rush VA | 75 |
| | holding VA | 9 |
| Dissipation at holding ≤20°C 50Hz | W | 2.5 |
| Max cycles frequency | | |
| Mechanical operation | cycles/h | 3600 |
| Operating times | | |
| Average time for Us control in AC | | |
| Closing NO | min ms | 8 |
| | max ms | 24 |
| Opening NO | min ms | 10 |
| | max ms | 20 |
| Closing NC | min ms | 14 |
| | max ms | 28 |
| Opening NC | min ms | 7 |
| | max ms | 18 |
| UL technical data | | |
| Full-load current (FLA) for three-phase AC motor | | |
| | at 480V A | 21 |
| | at 600V A | 17 |
| Yielded mechanical performance | | |
| for single-phase AC motor | | |
| | 110/120V HP | 2 |
| | 230V HP | 3 |
| for three-phase AC motor | | |
| | 200/208V HP | 7.5 |

| | | | | |
|--|-----------------------|-----------------------|----|-------------|
| | | 220/230V | HP | 7.5 |
| | | 460/480V | HP | 15 |
| | | 575/600V | HP | 15 |
| General USE | | | | |
| | Contactor | AC current | A | 32 |
| | Auxiliary contacts | AC voltage | V | 600 |
| | | AC current | A | 10 |
| | | DC voltage | V | 250 |
| | | DC current | A | 1 |
| Short-circuit protection fuse, 600V | | | | |
| | High fault | Short circuit current | kA | 100 |
| | | Fuse rating | A | 60 |
| | | Fuse class | | J |
| | Standard fault | Short circuit current | kA | 5 |
| | | Fuse rating | A | 100 |
| Contact rating of auxiliary contacts according to UL | | | | A600 - P600 |
| Ambient conditions | | | | |
| Temperature | | | | |
| | Operating temperature | min | °C | -50 |
| | | max | °C | 70 |
| | Storage temperature | min | °C | -60 |
| | | max | °C | 80 |
| Max altitude | | | m | 3000 |
| Resistance & Protection | | | | |
| Pollution degree | | | | 3 |
| Dimensions | | | | |

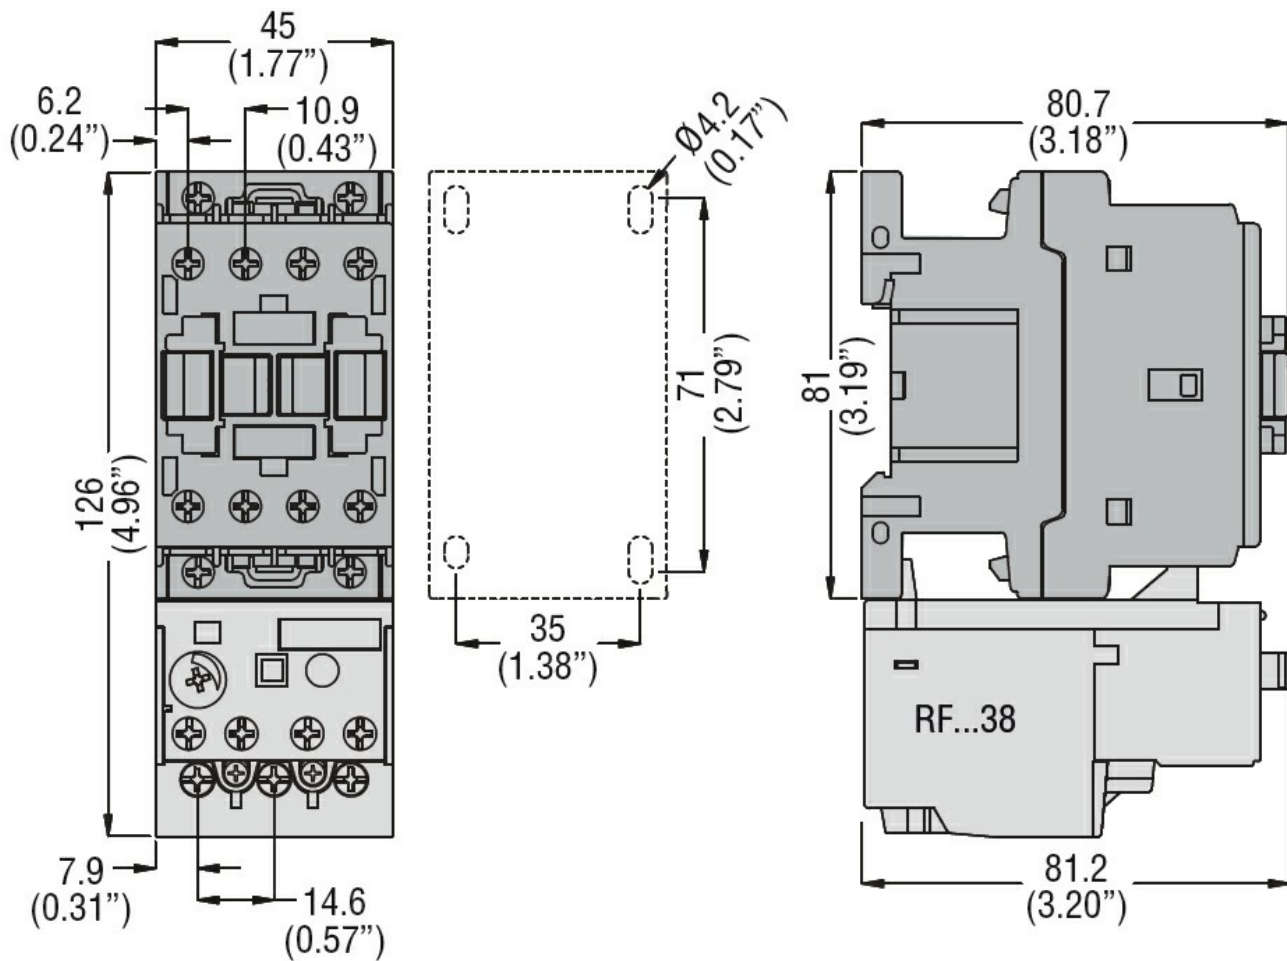

Wiring diagrams

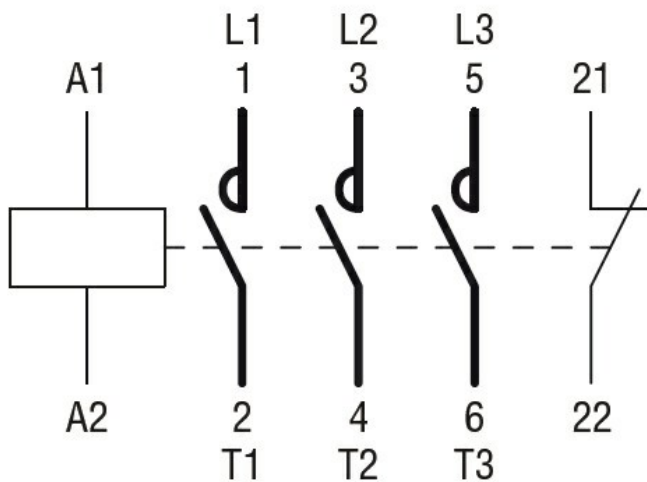

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1
CSA C22.2 n° 60947-4-1
IEC/EN/BS 60947-1
IEC/EN/BS 60947-4-1
UL 60947-1
UL 60947-4-1

Certificates

CCC

cULus

EAC

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching