



Product designation

Voltage
monitoring relays
PMV40

Product type designation

General characteristics

Description

Asymmetry,
phase loss and
incorrect phase
sequence relay

Type of system

Three-phase
without neutral

Power supply

Auxiliary supply voltage U_s

Self powered

Operating voltage range

0.7...1.2 U_e

Rated frequency

Hz 50/60 $\pm 5\%$

Power consumption Max

VA 30

Power dissipation Max

W 2.5

Control circuit

Rated voltage to control (U_e)

min	VAC	380
Max	VAC	575

Asymmetry set-point ($\%U_e$)

% 5...15

Tripping delay

s 0.1...20

Resetting time

s 0.1...20 (0.5 at
power up)

Resetting hysteresis

% 3

Instantaneous tripping for U_e

Voltage $< 70\% U_e$

Type of reset

Automatic

Repeat accuracy

% $< \pm 0.1$

Tripping time for phase loss

ms 60

Relay outputs

Number of relays

Nr. 1

Relay state

Normally
energised De-
energises at
tripping

Contact arrangement

1 changeover
SPDT

Rated operational voltage AC (IEC)

VAC 250

Maximum switching voltage

VAC 400

IEC Conventional free air thermal current I_{th}

A 8

UL/CSA and IEC/EN 60947-5-1 designation

B300

Electrical life (with rated load)

cycles 100000

Mechanical life

cycles 30000000

Functions

Modular version

2U

Minimum AC voltage

No

Maximum AC voltage	No
Phase loss	Yes
Incorrect phase sequence	Yes
Asymmetry	Yes

Indications

Indication	1 green LED for power on and tripping and 1 red LED for tripping
------------	--

Connections

Terminals type	Screw
----------------	-------

Tightening torque for terminals	max	Nm	0.8
	max	lbin	7

Conductor cross section

AWG/Kcmil	min	AWG	24
	Max	AWG	12

IEC	min	mm ²	0.2
	Max	mm ²	4

Insulations

Rated insulation voltage Ui	V	600
-----------------------------	---	-----

Rated impulse withstand voltage Uimp	kV	6
--------------------------------------	----	---

Operating frequency withstand voltage	kV	4
---------------------------------------	----	---

Ambient conditions

Temperature

Operating temperature	min	°C	-20
	max	°C	+60

Storage temperature	min	°C	-30
	max	°C	+80

Housing

Execution (n° of modules)	2
---------------------------	---

Material	Self-extinguishing polyamide
----------	------------------------------


Mounting	35mm DIN rail (IEC/EN 60715)
----------	------------------------------

IEC degree of protection	IP40 on front; IP20 at terminals
--------------------------	----------------------------------


Dimensions (W x H x D)	mm	35.8 x 104.7 x 64.9
------------------------	----	---------------------

Weight	g	130
--------	---	-----

Dimensions

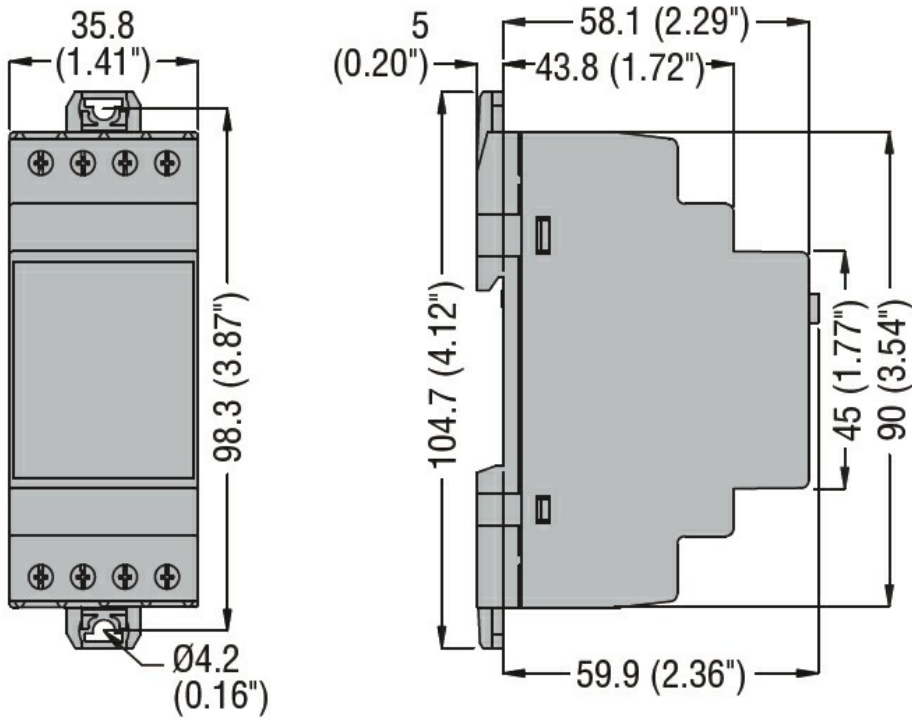

Wiring diagrams

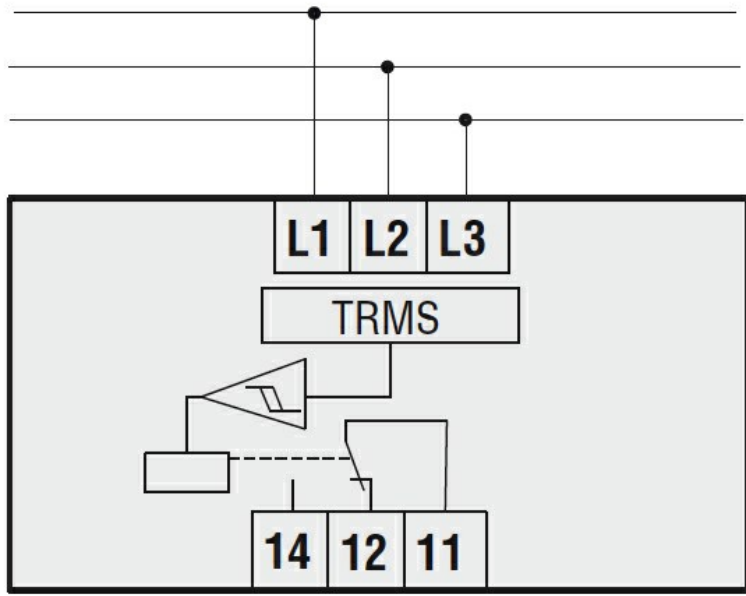

Certifications and compliance

Compliance

- CSA C22.2 n° 14
- IEC/EN 60255-5
- IEC/EN 61000-6-2
- IEC/EN 61000-6-3
- UL 508

Certificates

- cULus
- EAC

ETIM classification

ETIM 8.0

EC001438 -
Voltage
monitoring relay