


B1

Adhesive Backed Cord Clips

- Cables are easily snapped into or out of the clips

B2

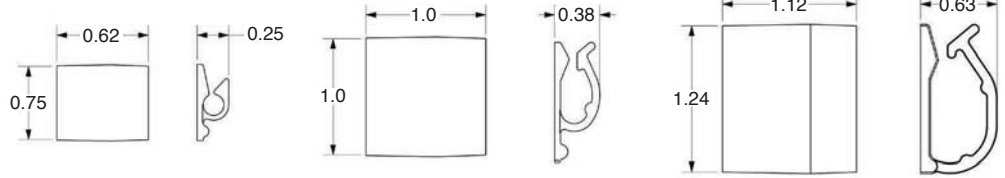

B3

C1

A
Max Bundle: 0.19"

B
Max Bundle: 0.38"

C
Max Bundle: 0.62"

C2

| | Max. Bundle Dia.: 0.19" | Max. Bundle Dia.: 0.38" | Max. Bundle Dia.: 0.62" |
|---|-------------------------|-------------------------|-------------------------|
| Natural Nylon 6.6; Rubber Adhesive; 100 pc/pkg | ACC19-A-C | ACC38-A-C | ACC62-A-C |
| Natural Nylon 6.6; Acrylic Adhesive; 100 pc/pkg | ACC19-AT-C | ACC38-AT-C | ACC62-AT-C |
| Black Nylon 6.6; Rubber Adhesive; 100 pc/pkg | ACC19-A-C0 | ACC38-A-C0 | ACC62-A-C0 |
| Black Weather Resistant Nylon 6.6; Acrylic Adhesive; 100 pc/pkg | ACC19-AT-C0 | ACC38-AT-C0 | ACC62-AT-C0 |
| Black Heat Stabilized Weather Resistant Nylon; High Bond Acrylic Adhesive, 1,000 pc/pkg | ACC19-AV-M300* | ACC38-AV-M300* | ACC62-AV-M300* |

*Not UL recognized

D2


D3

Push Mount Cord Clip

- Cables are easily snapped into or out of clips
- Design of wing provides added stability
- Winged design holds mount in place even in applications where vibration is present

E1

E2

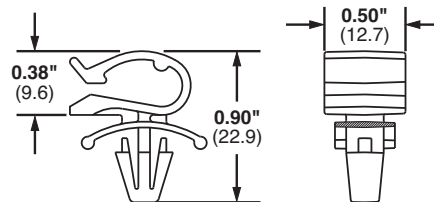

E3

E4

E5

| Part Number | Max. Bundle Diameter | | Max. Panel Thickness | | Panel Hole Diameter | | Material | Color | Environment | Mounting Method | Std. Pkg. Qty. | Std. Ctn. Qty. |
|--------------|----------------------|-----|----------------------|-----|---------------------|-----|-----------------------------|---------|-------------|-----------------|----------------|----------------|
| | In. | mm | In. | mm | In. | mm | | | | | | |
| PMCC38H25-C | 0.38 | 9.6 | 0.105 | 2.7 | 0.250 | 6.4 | Nylon 6.6 | Natural | Indoors | Push Barb | 100 | 1000 |
| PMCC38H25-M0 | 0.38 | 9.6 | 0.105 | 2.7 | 0.250 | 6.4 | Weather Resistant Nylon 6.6 | Black | Outdoors | | 1000 | 5000 |

G

H