


**Product Description:**

La gamme de hublots IP66 Orbital™ est simple mais parfaite pour n'importe quelle application. Avec un corps en polycarbonate IK10 et un diffuseur opale pour un rendu homogène, elle est résistante aux chocs et conçue pour durer dans le temps. Disponible en deux puissances, en blanc ou noir, avec cadre demi-lune en option, alimentation de secours autonome, système de détection hyperfréquence et fonction couloir. Compatible commutations fréquentes et détecteur de présence sans impact sur la durée de vie.


**Product Image:**



**Line Drawing**

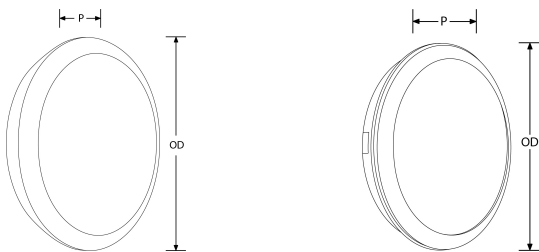

**Polar Curve**



**Product Specs:**

|                                      |        |                                      |               |
|--------------------------------------|--------|--------------------------------------|---------------|
| <b>Technology</b>                    | LED    | <b>Input Voltage</b>                 | 220-240V AC   |
| <b>Lamp Base</b>                     | Aucun  | <b>Positional Adjustment</b>         | Fixe          |
| <b>Number of LEDs</b>                | 136    | <b>Luminaire Distribution</b>        | Direct        |
| <b>Lifetime L70 (hrs)</b>            | 25.000 | <b>Input Frequency</b>               | 50/60HZ       |
| <b>Dimmable</b>                      | Non    | <b>IP Rating</b>                     | IP66          |
| <b>IK Rating</b>                     | IK10   | <b>Operating Env. Temp. (Min) °C</b> | -25°C         |
| <b>Operating Env. Temp. (Max) °C</b> | 40°C   | <b>Optic Material</b>                | Polycarbonate |
| <b>Power Factor</b>                  | 0.9    | <b>Overall Diameter (mm)</b>         | 360           |
| <b>Weight (Kg)</b>                   | 1.624  |                                      |               |

## SKU Table and Ordering:

| SKU Code           | Wattage | Beam Angle | Lumens | Lumens/Watt | CRI | Colour | Finish Colour |
|--------------------|---------|------------|--------|-------------|-----|--------|---------------|
| EN-BH25BLK/30      | 25      | 120        | 1750   | 70          | 80  | 3000   | Noir          |
| EN-BH25BLK/30MS    | 25      | 120        | 1750   | 70          | 80  | 3000   | Noir          |
| EN-BH25BLK/40      | 25      | 120        | 1800   | 72          | 80  | 4000   | Noir          |
| EN-BH25BLK/40EM    | 27      | 120        | 1800   | 67          | 80  | 4000   | Noir          |
| EN-BH25BLK/40EMMS  | 27      | 120        | 1800   | 67          | 80  | 4000   | Noir          |
| EN-BH25BLK/40EMMSC | 27      | 120        | 1800   | 67          | 80  | 4000   | Blanc         |
| EN-BH25BLK/40EMR   | 27      | 120        | 1800   | 67          | 80  | 4000   | Noir          |
| EN-BH25BLK/40MS    | 25      | 120        | 1800   | 72          | 80  | 4000   | Noir          |
| EN-BH25BLK/40MSC   | 25      | 120        | 1800   | 72          | 80  | 4000   | Noir          |
| EN-BH25W/30        | 25      | 120        | 1750   | 70          | 80  | 3000   | Blanc         |
| EN-BH25W/30MS      | 25      | 120        | 1750   | 70          | 80  | 3000   | Blanc         |
| EN-BH25W/40        | 25      | 120        | 1800   | 72          | 80  | 4000   | Blanc         |
| EN-BH25W/40EM      | 27      | 120        | 1800   | 67          | 80  | 4000   | Blanc         |
| EN-BH25W/40EMMS    | 27      | 120        | 1800   | 67          | 80  | 4000   | Blanc         |
| EN-BH25W/40EMMSC   | 27      | 120        | 1800   | 67          | 80  | 4000   | Blanc         |
| EN-BH25W/40EMR     | 27      | 120        | 1800   | 67          | 80  | 4000   | Blanc         |
| EN-BH25W/40MS      | 25      | 120        | 1800   | 72          | 80  | 4000   | Blanc         |
| EN-BH25W/40MSC     | 25      | 120        | 1800   | 72          | 80  | 4000   | Blanc         |

## Compliance & Approvals:



## Warranty:

This product has a guarantee period of . Warranties may be available on certain products as indicated in the product description. Warranties are valid from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label or installation in an improper working environment or installation. Should this product fail during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. Aurora does not accept responsibility for any installation costs associated with the replacement of this product and Aurora reserves the right to alter specifications without prior notice.

**UK Head Office**  
Apex Park  
6 Little Burrow  
Welwyn Garden City AL7 4SW  
United Kingdom  
Tel : +44 (0) 1727 83 66 11