

## Hydroproof 2 - T8 HQPS electronic ballast

Hydroproof 2 HQPS 258 T8 EB

0045337



### Caractéristiques de la gamme

- Body made from extremely resistant glass-reinforced polyester (SMC)
- Protection against chemicals (Please contact your local sales office for full listing)
- User-friendly and long lasting materials
- Diffuser made of High Quality PolyStyrene (HQPS) or polycarbonate with internal prism system for high light output and broad light dispersion
- Stainless steel closure clips ensure permanent pressure between diffuser and housing to guarantee IP rating



### APERÇU DU PRODUIT

Numéro de commande	0045337
Code EAN	5410288453378
Certifications	D-mark, ENEC
Montage	Ceiling surface
Corps	Glass fibre reinforced polyester
Tension (V)	230
Lampes	2 x 58W T26 G13
Couleur	Grey
Indice de protection IP	67
Indice de protection IK	2

# Hydroproof 2 - T8 HQPS electronic ballast

Hydroproof 2 HQPS 258 T8 EB

0045337

## TABLE DE DONNÉES

### Données générales

<b>Numéro de commande</b>	0045337
<b>Code EAN</b>	5410288453378
<b>Certifications</b>	D-mark, ENEC
<b>Montage</b>	Ceiling surface
<b>Longue description</b>	Body made from extremely resistant glass-reinforced polyester (SMC). Protection against chemicals (Please contact your local sales office for full listing). User-friendly and long lasting materials. Diffuser made of High Quality PolyStyrene (HQPS) or polycarbonate with internal prism system for high light output and broad light dispersion. Stainless steel closure clips ensure permanent pressure between diffuser and housing to guarantee IP rating
<b>Nom du produit</b>	Hydroproof 2 HQPS 258 T8 EB
<b>Disponibilité de l'appareillage</b>	Included
<b>Montage de l'appareillage</b>	Integral
<b>Type d'appareillage</b>	Electronic
<b>Environnement</b>	Interior
<b>Application générale</b>	Car wash, Chemical industries, Mechanical industries, Technical rooms
<b>Corps</b>	Glass fibre reinforced polyester
<b>Environnement spécial</b>	Clean room, Waterproof
<b>Quantité par emballage</b>	1

### Données optiques

<b>Type de distribution</b>	Symmetric
-----------------------------	-----------

### Données électriques

<b>Tension (V)</b>	230
<b>Lampes</b>	2 x 58W T26 G13
<b>Phase montante descendante</b>	No
<b>Nombre de têtes</b>	1
<b>Nombre de lampes total</b>	2

# Hydroproof 2 - T8 HQPS electronic ballast

Hydroproof 2 HQPS 258 T8 EB

**0045337**

## Données physiques


<b>Poids (kg)</b>	3.70
<b>Couleur</b>	Grey
<b>Lampe incluse</b>	No
<b>Hauteur (mm)</b>	108
<b>Largeur (mm)</b>	172
<b>Longueur (mm)</b>	1612
<b>Indice de protection IP</b>	67
<b>Indice de protection IK</b>	2
<b>Finition du diffuseur</b>	Prismatic
<b>Matériau du diffuseur</b>	Polystyrene
<b>Secours</b>	Without
<b>Single package dimensions (L x W x H) (cm)</b>	169.00 x 19.00 x 12.00
<b>Outer package dimensions (L x W x H) (cm)</b>	169.00 x 19.00 x 12.00

## Hydroproof 2 - T8 HQPS electronic ballast

Hydroproof 2 HQPS 258 T8 EB

0045337

### PHOTOMÉTRIE

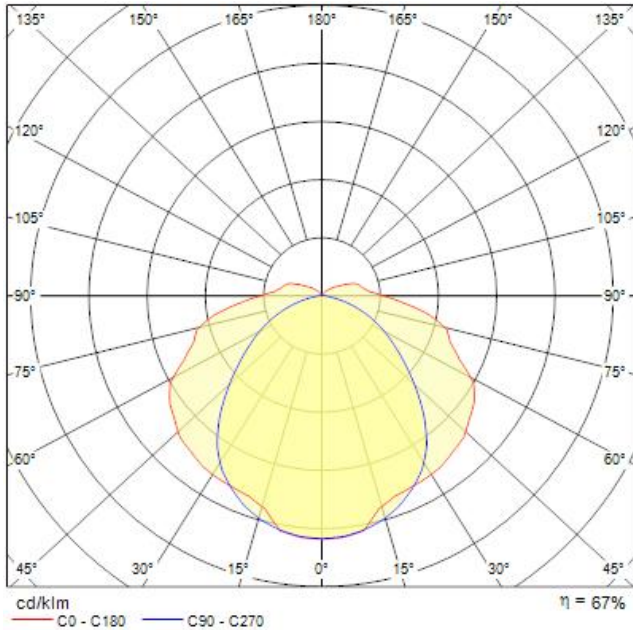


Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(C0)	Illuminance [lx]
0.5	1.10 4.30	6947	47.6°	76.9°	1055 40
1.0	2.19 8.59	1737	47.6°	76.9°	266 10
1.5	3.29 12.89	772	47.6°	76.9°	118 4
2.0	4.38 17.19	434	47.6°	76.9°	67 3
2.5	5.48 21.49	278	47.6°	76.9°	43 2
3.0	6.57 25.78	193	47.6°	76.9°	30 1

Distance [m]      Cone diameter [m]      Illuminance [lx]  
 — C0 - C180 (Half beam angle: 153.8°)  
 — C90 - C270 (Half beam angle: 95.2°)

### SCHÉMAS TECHNIQUES

#### Dimensions (mm) Weight (Kg)

Model T8	Model T5	L	W	H	F	Clips	Kg
1 x 18W	1x14/24W	702	102	108	500	6	1.9
1 x 36W	1x28W	1312	102	108	800	8	2.8
1 x 58W	1x35/49W	1612	102	108	1100	10	3.7
2 x 18W	2x14/24W	702	172	108	500	6	1.9
2 x 36W	1x54W /2x28W	1312	172	108	800	8	2.8
2 x 58W	1x80W /	1612	172	108	1100	10	3.7



### CLASSE ÉNERGÉTIQUE

## Hydroproof 2 - T8 HQPS electronic ballast

*Hydroproof 2 HQPS 258 T8 EB*

**0045337**

