

ALIMENTATION LED INTÉRIEURE

en tension constante 24V DC courant continu polarisé

Alimentations extra-plates

P (w)	IP	Code
7,2	20	52003

L x l x h = 118 x 40 x 10 mm



P (w)	IP	Code
20	20	52005

L x l x h = 160 x 40 x 14 mm

P (w)	IP	Code
30	20	52012

L x l x h = 246 x 30 x 16 mm

Alimentations

P (w)	IP	Code
12	20	0697

L x l x h = 80 x 40 x 27 mm



P (w)	IP	Code
30	20	0632

L x l x h = 150 x 40 x 30 mm

P (w)	IP	Code
50	20	0675
75	20	52010

L x l x h = 180 x 60 x 30 mm

P (w)	IP	Code
100	20	0685

L x l x h = 180 x 90 x 35 mm



P (w)	IP	Code
150	20	0732

L x l x h = 270 x 65 x 42 mm

Pour installation hors plafond.



P (w)	IP	Code
N 300	20	52013

L x l x h = 215 x 115 x 50 mm

Appareils fonctionnant en 24V DC

MEUBLED



FOCUS R60




EGO



BOLO



SLIMLED
KIT SLIMLED

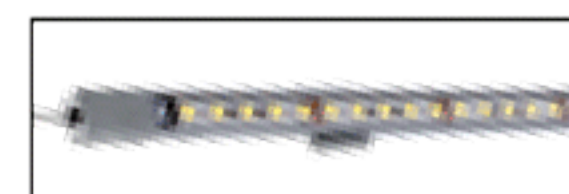

LINCUS



JAKLED 30/60/65/120



MODULED 24




FLEXI CRISTAL 30/60/120
FLEXO LED 30/60/65/120



Système changement de couleur RGB

JAKLED 65 RGB

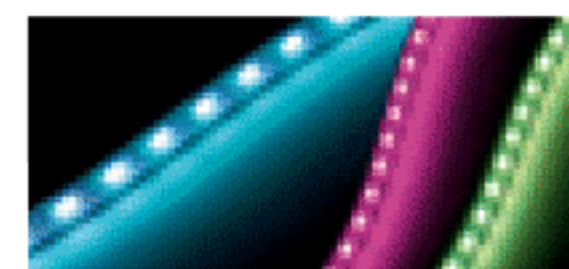

METEOR
MINI METEOR

