






	27-50 V / PoE, PoE+ TBTS
	RJ 45 IP Network
x =	x = 12
	-5°C → +45°C
NF EN50428 IEC 60669-2-1	

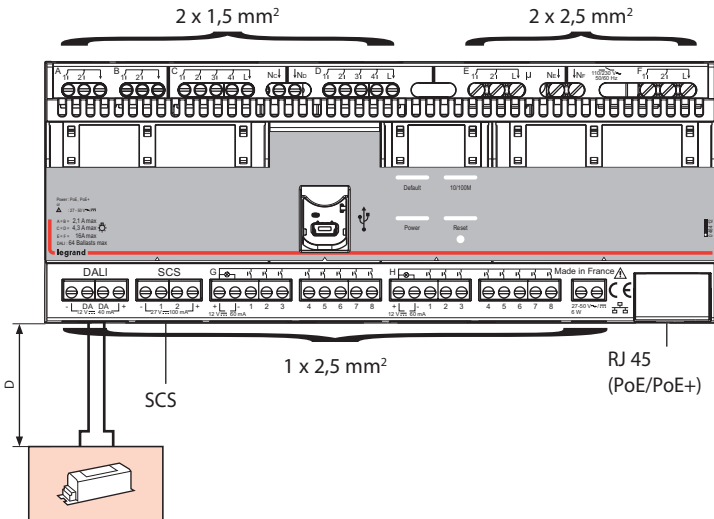


D	∅
≤ 100 m	0,5 mm ²
≤ 150 m	0,75 mm ²
≤ 300 m	1,5 mm ²

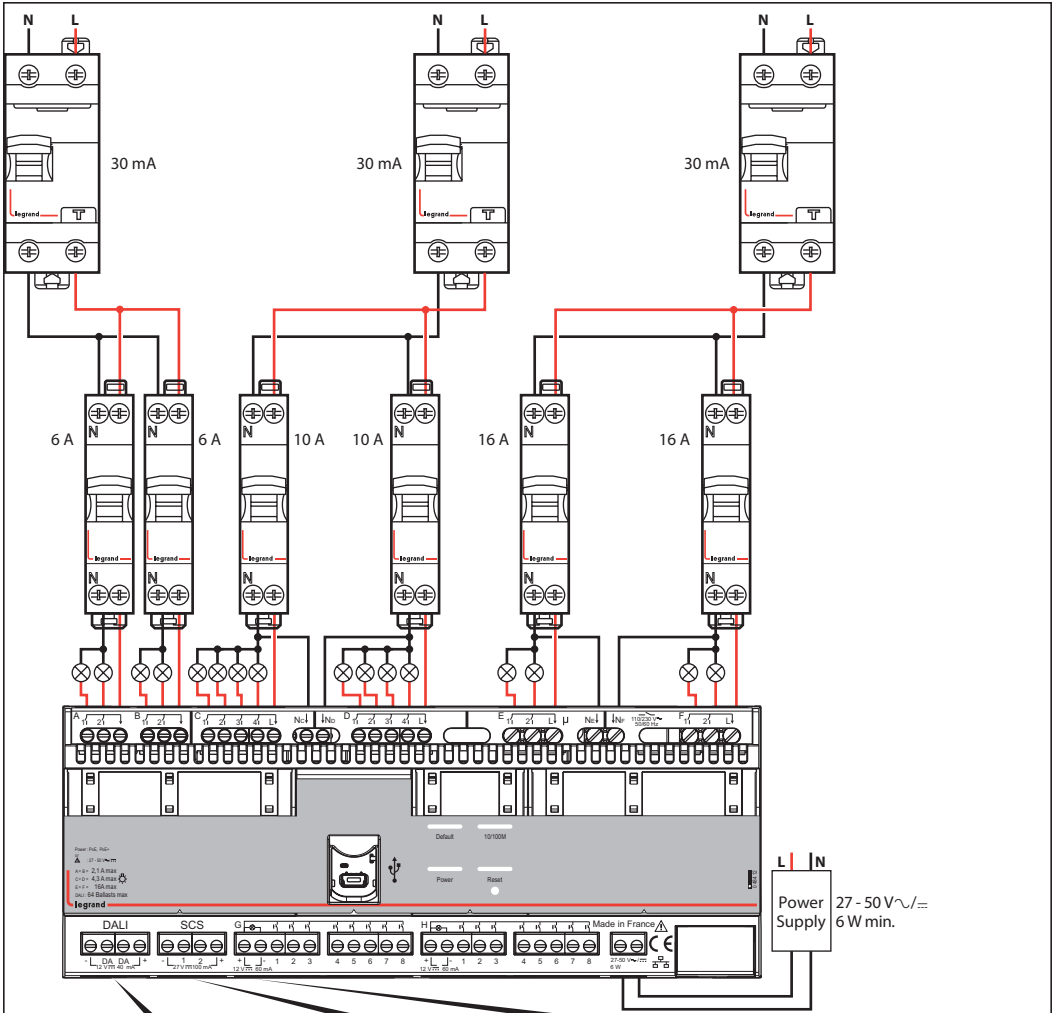

Power Supply 27 - 50 V ~ / ~ 6 W min.

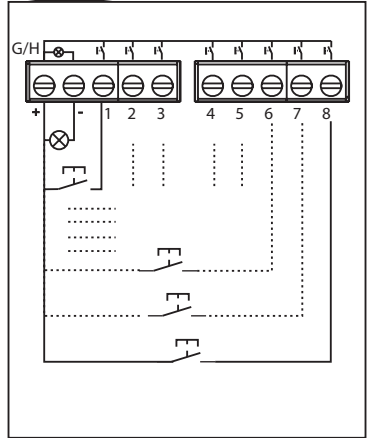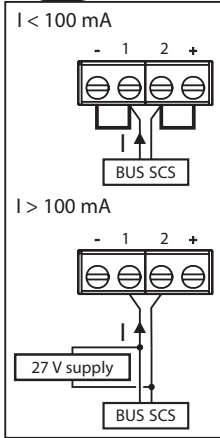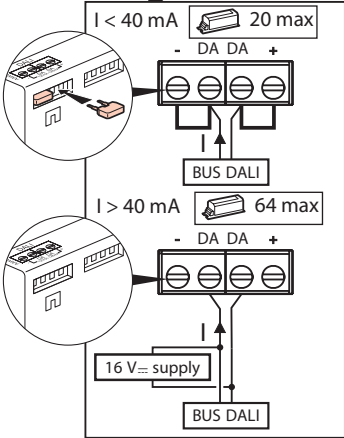

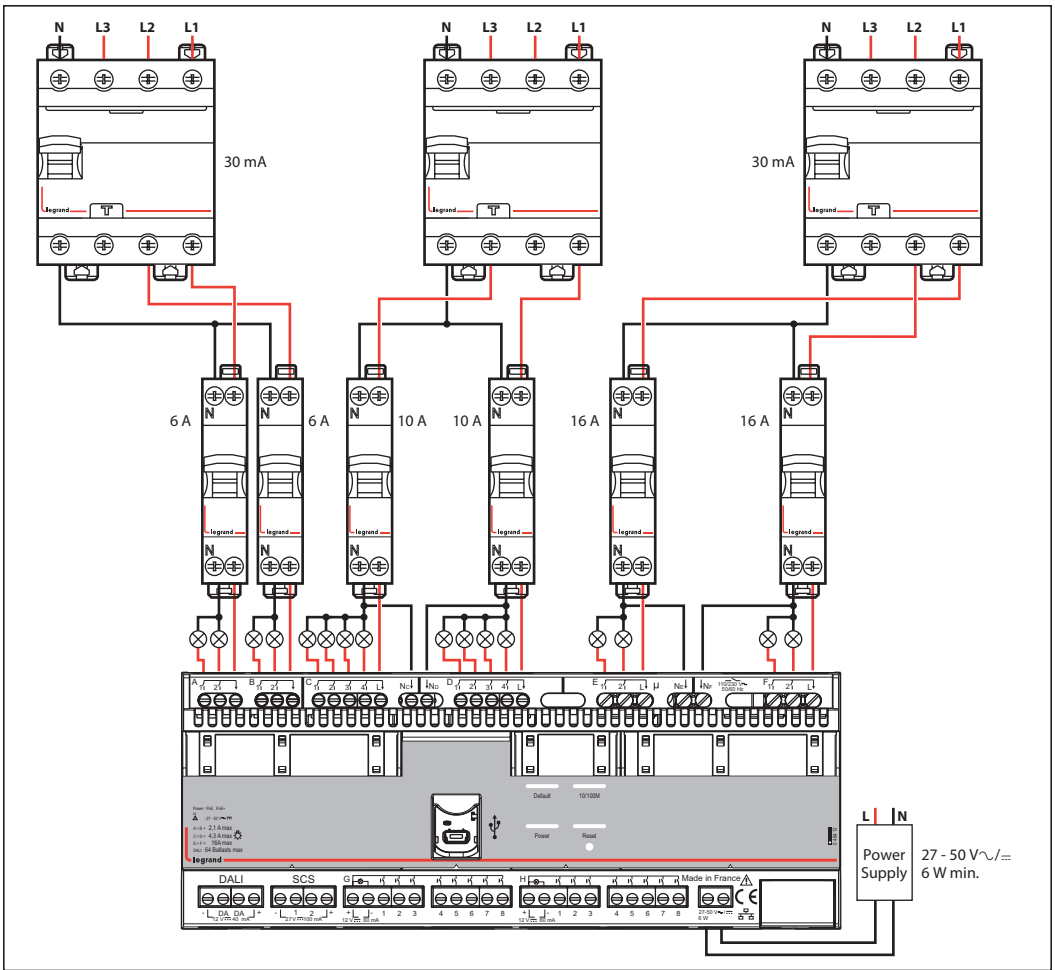

Reset

USB

Reset

RJ 45

Input	G1	G2	G3	G4	G5	G6	G7	G8
Output	A1	A2	B1	B2	C1	C2	C3	C4
Action	UP/ STOP	DOWN/ STOP	UP/ STOP	DOWN/ STOP	ON/ OFF	ON/ OFF	ON/ OFF	ON/ OFF

Input	H1	H2	H3	H4	H5	H6	H7	H8
Output	D1	D2	D3	D4	E1	E2	F1	F2
Action	ON/ OFF	ON/ OFF	ON/ OFF	ON/ OFF	ON/ OFF	ON/ OFF	ON/ OFF	ON/ OFF