



Product Environmental Profile

KNX Multitouch Pro



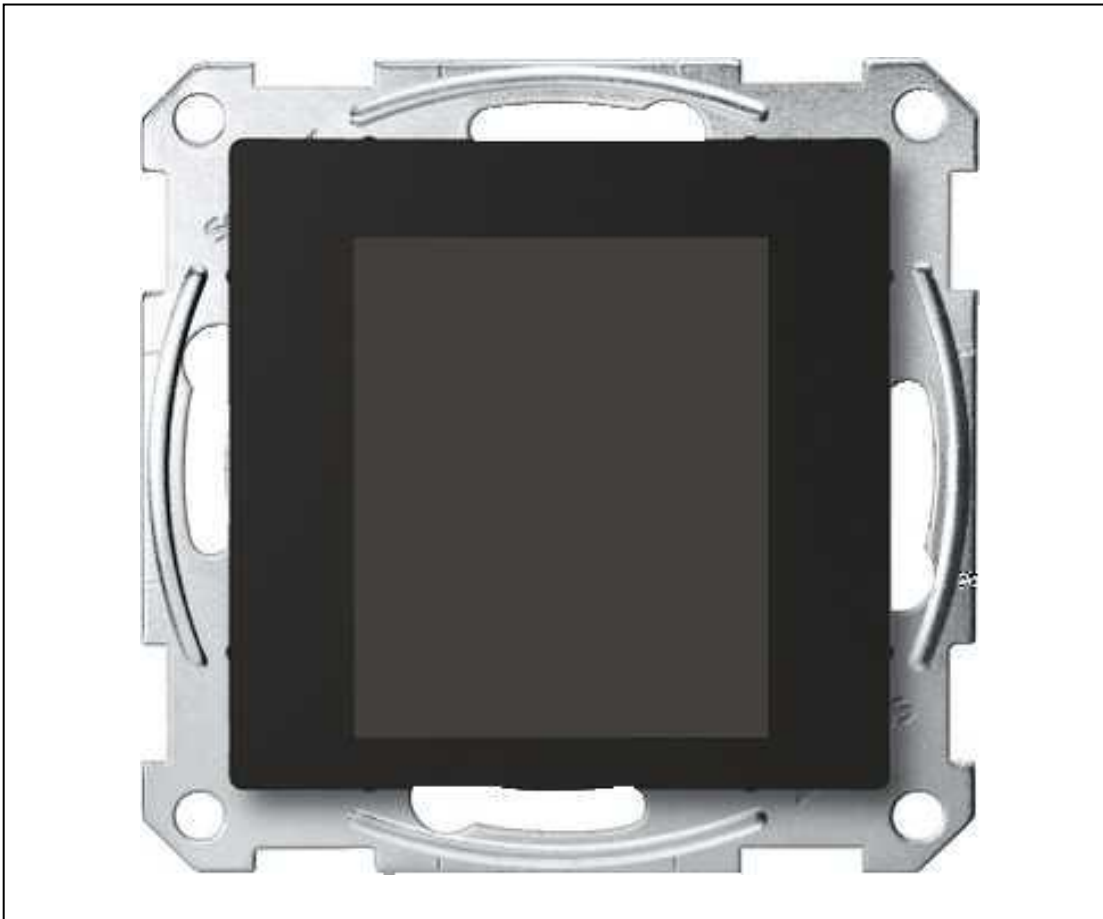


General information

Representative product	KNX Multitouch Pro -MTN6215-0310
Description of the product	The main purpose of the KNX Multitouch Pro is to offer the most complete and flexible interface to control the different applications integrated in the system. This range consists of electronic KNX interfaces with touch display, IR proximity and gesture detection. The representative product used for the analysis is KNX Multitouch Pro Ref: MTN6215-0310.
Functional unit	The main function of the KNX Multitouch Pro is to offer the most complete and flexible interface to control the different applications integrated in the system for 10 years.



Constituent materials

Reference product mass	82,666 including the product, its packaging and additional elements and accessories
-------------------------------	---

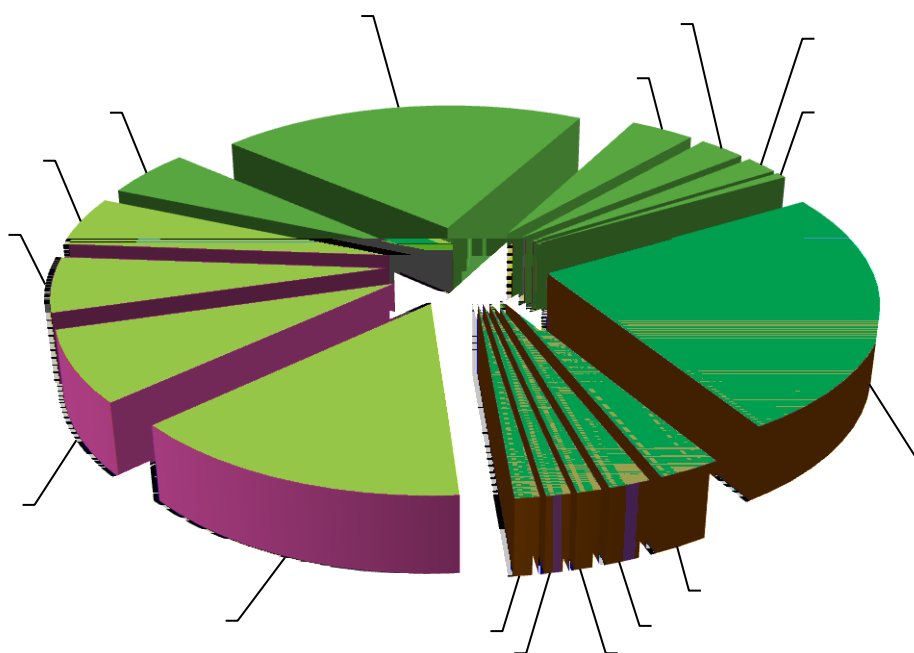


Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>

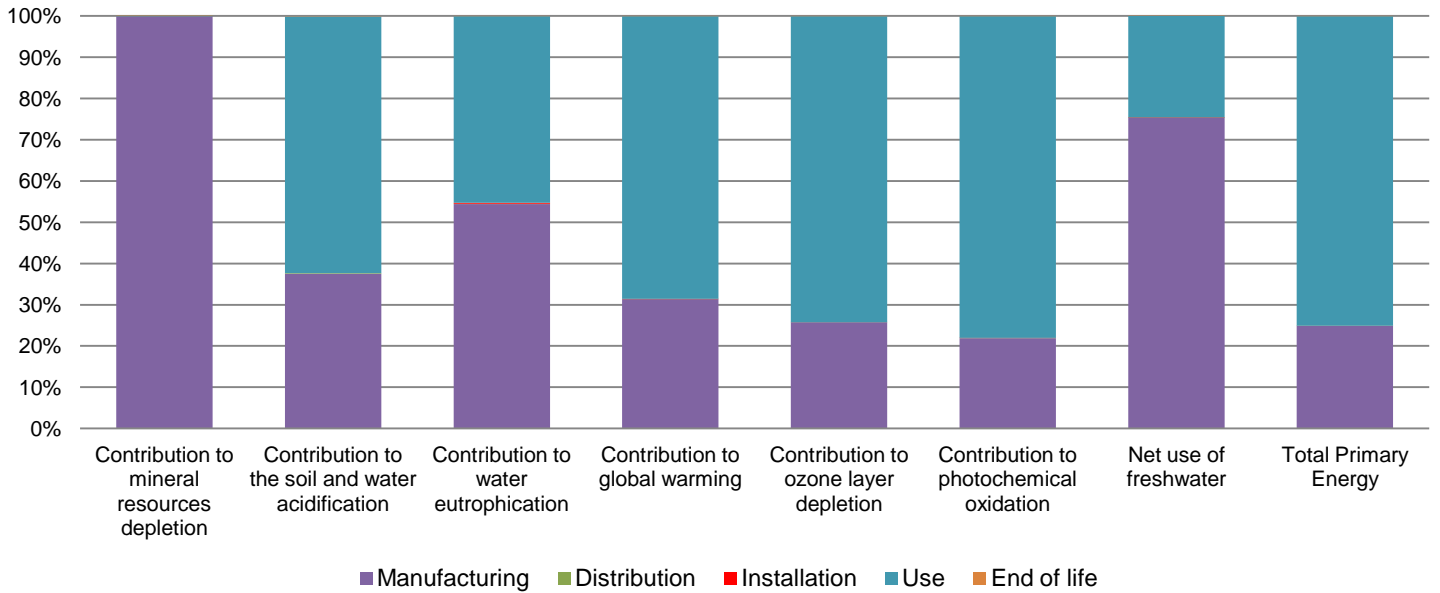


Optional indicators		KNX Multitouch Pro - MTN6215-0310					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	6,19E+02	1,90E+02	1,50E-01	0*	4,29E+02	9,79E-02
Contribution to air pollution	m³	4,31E+03	1,19E+03	4,54E-01	0*	3,12E+03	7,66E-01
Contribution to water pollution	m³	2,18E+03	8,48E+02	1,75E+00	8,00E-01	1,33E+03	1,16E+00
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	3,28E-02	3,28E-02	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	3,10E+00	3,10E+00	0*	0*	0*	0*
Total use of non-renewable primary energy resources	MJ	8,33E+02	2,05E+02	1,51E-01	0*	6,28E+02	1,18E-01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	3,03E+00	3,03E+00	0*	0*	0*	0*
Use of renewable primary energy resources used as raw material	MJ	7,04E-02	7,04E-02	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	8,32E+02	2,04E+02	1,51E-01	0*	6,28E+02	1,18E-01
Use of non renewable primary energy resources used as raw material	MJ	8,01E-01	8,01E-01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	1,52E+01	1,21E+01	0*	0*	2,98E+00	1,16E-01
Non hazardous waste disposed	kg	4,74E+00	2,23E+00	0*	1,30E-02	2,50E+00	0*
Radioactive waste disposed	kg	3,14E-03	5,72E-04	0*	0*	2,57E-03	5,87E-07
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	2,33E-02	2,79E-03	0*	0*	0*	2,05E-02
Components for reuse	kg	0,00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	6,47E-03	1,29E-04	0*	2,00E-03	0*	4,34E-03
Exported Energy	MJ	4,98E-03	2,29E-03	0*	2,69E-03	0*	0*

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.5, database version 2015-04.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration N°	SCHN-00112-V01.01-EN	Drafting rules	PCR-ed3-EN-2015 04 02
Verifier accreditation N°	VH08	Supplemented by	PSR-0005-ed1-2012 12 11
Date of issue	08/2016	Information and reference documents	www.pep-ecopassport.org
		Validity period	5 years
Independent verification of the declaration and data, in compliance with ISO 14025 : 2010			
Internal	External	X	
The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)			
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »			
			

Schneider Electric Industries SAS

Country Customer Care Center

<http://www2.schneider-electric.com/sites/corporate/en/support/operations/local-operations/local-operations.page>

0825 012 999

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

www.schneider-electric.com

Published by Schneider Electric

SCHN-00112-V01.01-EN

08/2016