

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| PANDUIT PART NO. | WE I GHT |
|------------------|-----------------|
| MDC79D | 600 lb (272 kg) |

- 1. INCLUDED WITH SYSTEM:
 - SPLIT SIDE PANELS.
 - NETWORK CABLING AND CONNECTIVITY.
 - (15)28GA CABLES TO CONNECT SERVER, SWITCHES, STORAGE AND OOB MANAGEMENT. BLUE AND INTERNATIONAL GRAY PROVIDED.
 - CJS6X88TGY CAT 6A SHIELDED JACKS.
 - TOOLLESS AND PERFORATED BLANKING PANELS.
 - FCEIUA FIBER MANAGEMENT TRAY.
 - CPPL24WBLY 24 PORT PATCH PANEL.
 - CABLE MANAGEMENT.
 - CMPHHF1 HORIZONTAL D-RINGS.
 - VERTICAL CABLE MANAGEMENT FINGERS.
 - CABINET GROUNDING.
 - RGRB19CN UNIVERSAL 20 PORT GROUND BAR.
 - RGCBNJ660P22 CBN GROUNDING KIT.
 - RGEJ1024URT (2) EQUIPMENT JUMPERS.
 - ACCESSORIES.
 - HOOK AND LOOP.
 - 12-24 BONDING AND STANDARD CAGE NUTS.
 - ESD PORTS AND WRIST STRAPS.
 - CASTERS.
 - SHIPPED ON A DYNAMIC PALLET.
- 2. FULLY BONDED STRUCTURE WHEN ASSEMBLED PER INSTRUCTIONS.
- 3. STATIC LOAD RATING: 2500LB (1134 kg).
- 4. DYNAMIC LOAD RATING: 1250LB (567 kg).
- 5. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR PARTS APPLICABLE FOR USE WITH THIS PRODUCT.

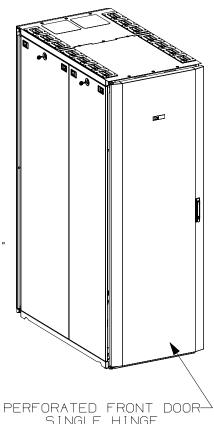

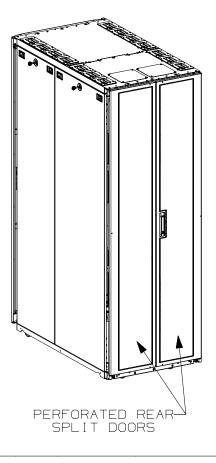

SINGLE HINGE

TITLE

MDC79D - CUSTOMER DRAWING CONTROL DRAWING ITEM REVISION NAME 15V524AA/00 DATASET FILE NAME 15V524AA_DC/00A.PRT MATERIAL: UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: IN [mm] N/A .x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 ° DRAWING NUMBER: 00A 6/8/16 MW MBVE RELEASED TO PRODUCTION 15V524AA_00 THIRD ANGLE 15V524AA PROJECTION SCALE DRAWN BY DATE APR REVI DATE BY CHK DESCRIPTION ECN MW SHT 1 0F 1 6-8-16 N/A