

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
P36E09M-XYZ	SEE SHEET 2

SPECIFICATION:







1. STANDARD:
- UNIT TYPE: MONITORED SWITCHED
 - ORIENTATION: VERTICAL, 0U FULL, WIDE
 - OUTLET QTY&TYPE: (24) C13, (12) C19
 - INPUT VOLTAGE: 200-240/346-415VAC
 - INPUT CURRENT: 32A
 - BREAKER QTY&TYPE: (6) 16AMP, SINGLE-POLE
 - INPUT PHASE: THREE-PHASE WYE
 - RATED POWER: 22.0kVA
 - INPUT PLUG: IEC 60309 3P+N+E 6H 32A
 - INPUT POWER CORD: SEE SHEET 2 FOR PART NUMBER TABLE
 - REGULATORY STANDARD: RoHS COMPLIANT
2. ADDITIONAL: NONE
3. ACCESSORIES: (1) QUICK-START GUIDE

NOTES:

- PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES]
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
- FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL
- DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

IDENTIFICATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: P36E09M-XX Y Z

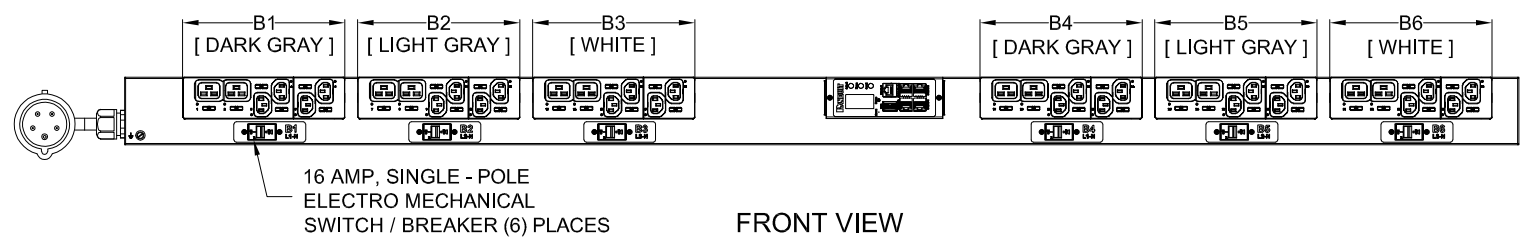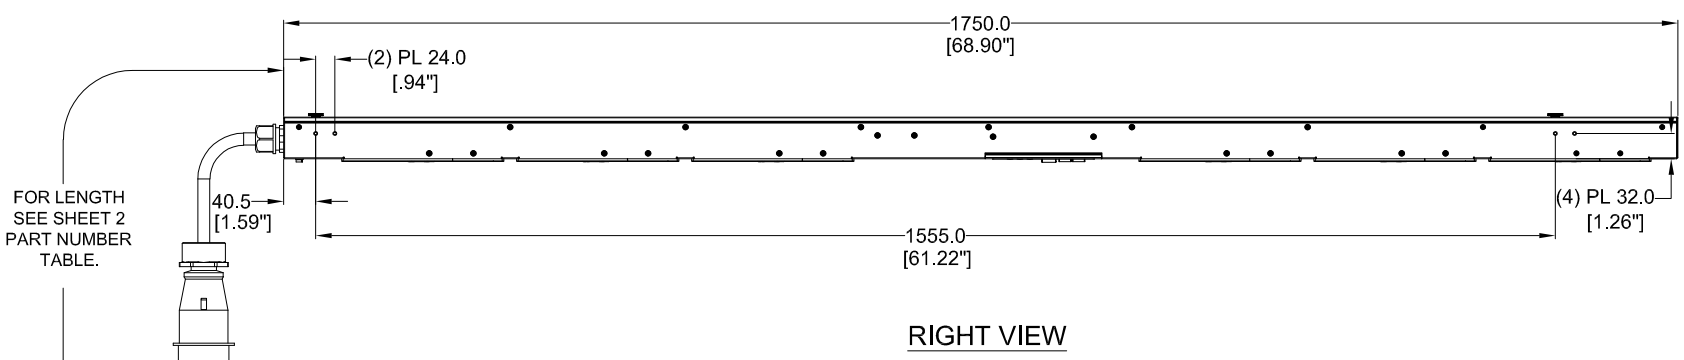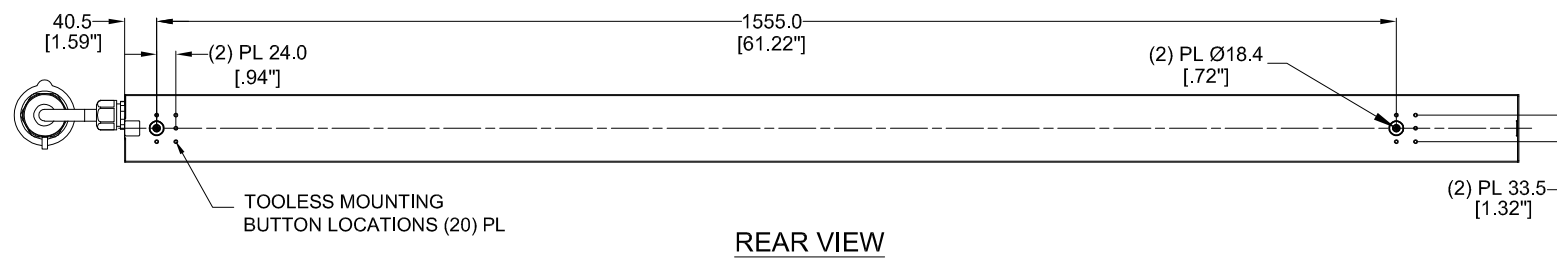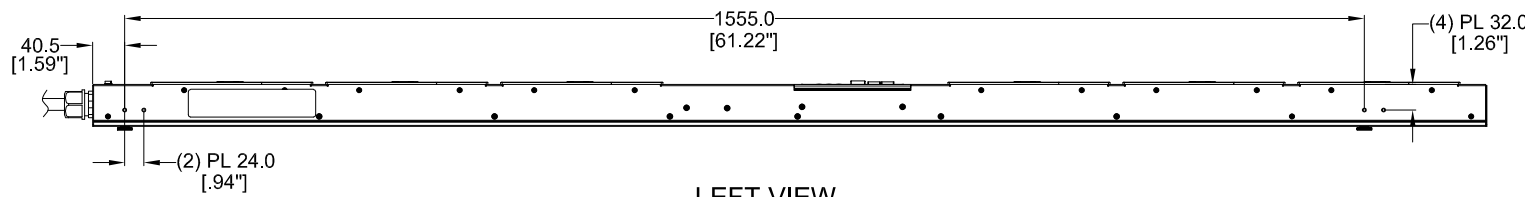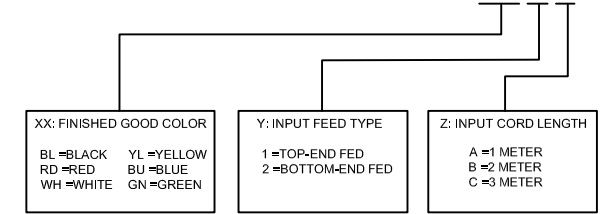

FOR LENGTH SEE SHEET 2 PART NUMBER TABLE.

PLUG/RECEPTACLE BLOCK

PLUG
IEC 60309, 4P 5W, 6H
IP44 (SPASHPROOF)
32A, 346-415V MAX RATED INPUT

RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT

RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P36E09M
01A	08/15/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P36E09M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY.

TITLE: INTELLIGENT SERIES PDU
P36E09M-XYZ
CUSTOMER DRAWING

ITEM REVISION NAME:

DATASHEET FILE NAME:

UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]

Tolerance(mm)	
0<L<50	±0.5
50<L<250	±1.0
250<L<500	±1.5
500<L<1000	±2.5
1000<L<2000	±4.0

THIRD ANGLE PROJECTION

MATERIAL/COLOR: N/A

DRAWING NUMBER: P36E09M_DC

DRAWN BY: GEORGE
DATE: 08/15/2017
CHK: SEAN
SCALE: NONE

SHT 1 OF 2

2



1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P36E09M	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10'[+10"/-5"]	10.8kg
P36E09M-BL1A	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3'[+3.5"/-1.75"]	9.4kg
P36E09M-BL1B	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	10.1kg
P36E09M-RD1A	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3'[+3.5"/-1.75"]	9.4kg
P36E09M-RD1B	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	10.1kg
P36E09M-RD1C	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10'[+10"/-5"]	10.8kg
P36E09M-WH1A	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3'[+3.5"/-1.75"]	9.4kg
P36E09M-WH1B	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	10.1kg
P36E09M-WH1C	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10'[+10"/-5"]	10.8kg
P36E09M-YL1A	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3'[+3.5"/-1.75"]	9.4kg
P36E09M-YL1B	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	10.1kg
P36E09M-YL1C	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10'[+10"/-5"]	10.8kg
P36E09M-BU1A	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3'[+3.5"/-1.75"]	9.4kg
P36E09M-BU1B	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	10.1kg
P36E09M-BU1C	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10'[+10"/-5"]	10.8kg
P36E09M-GN1A	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3'[+3.5"/-1.75"]	9.4kg
P36E09M-GN1B	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	10.1kg
P36E09M-GN1C	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10'[+10"/-5"]	10.8kg
P36E09M-BL2A	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3'[+3.5"/-1.75"]	9.4kg
P36E09M-BL2B	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	10.1kg
P36E09M-BL2C	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10'[+10"/-5"]	10.8kg
P36E09M-RD2A	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3'[+3.5"/-1.75"]	9.4kg
P36E09M-RD2B	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	10.1kg
P36E09M-RD2C	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10'[+10"/-5"]	10.8kg
P36E09M-WH2A	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3'[+3.5"/-1.75"]	9.4kg
P36E09M-WH2B	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	10.1kg
P36E09M-WH2C	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10'[+10"/-5"]	10.8kg
P36E09M-YL2A	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3'[+3.5"/-1.75"]	9.4kg
P36E09M-YL2B	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	10.1kg
P36E09M-YL2C	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10'[+10"/-5"]	10.8kg
P36E09M-BU2A	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3'[+3.5"/-1.75"]	9.4kg
P36E09M-BU2B	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	10.1kg
P36E09M-BU2C	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10'[+10"/-5"]	10.8kg
P36E09M-GN2A	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3'[+3.5"/-1.75"]	9.4kg
P36E09M-GN2B	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	10.1kg
P36E09M-GN2C	VERTICAL,(24) C13,(12) C19,MONITORED SWITCHED, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10'[+10"/-5"]	10.8kg

B

B



A

A

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P36E09M
01A	08/15/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P36E09M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN
		DATE
		PRINT
TITLE: INTELLIGENT SERIES PDU P36E09M-XXYZ CUSTOMER DRAWING		
ITEM REVISION NAME:		
DATASHEET FILE NAME:		
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR: N/A
Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		DRAWING NUMBER: P36E09M_DC
THIRD ANGLE PROJECTION	DRAWN BY: GEORGE	DATE: 08/15/2017
	CHK: SEAN	SCALE: NONE
		SHT 2 OF 2
		SCALE: B

2



1