


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

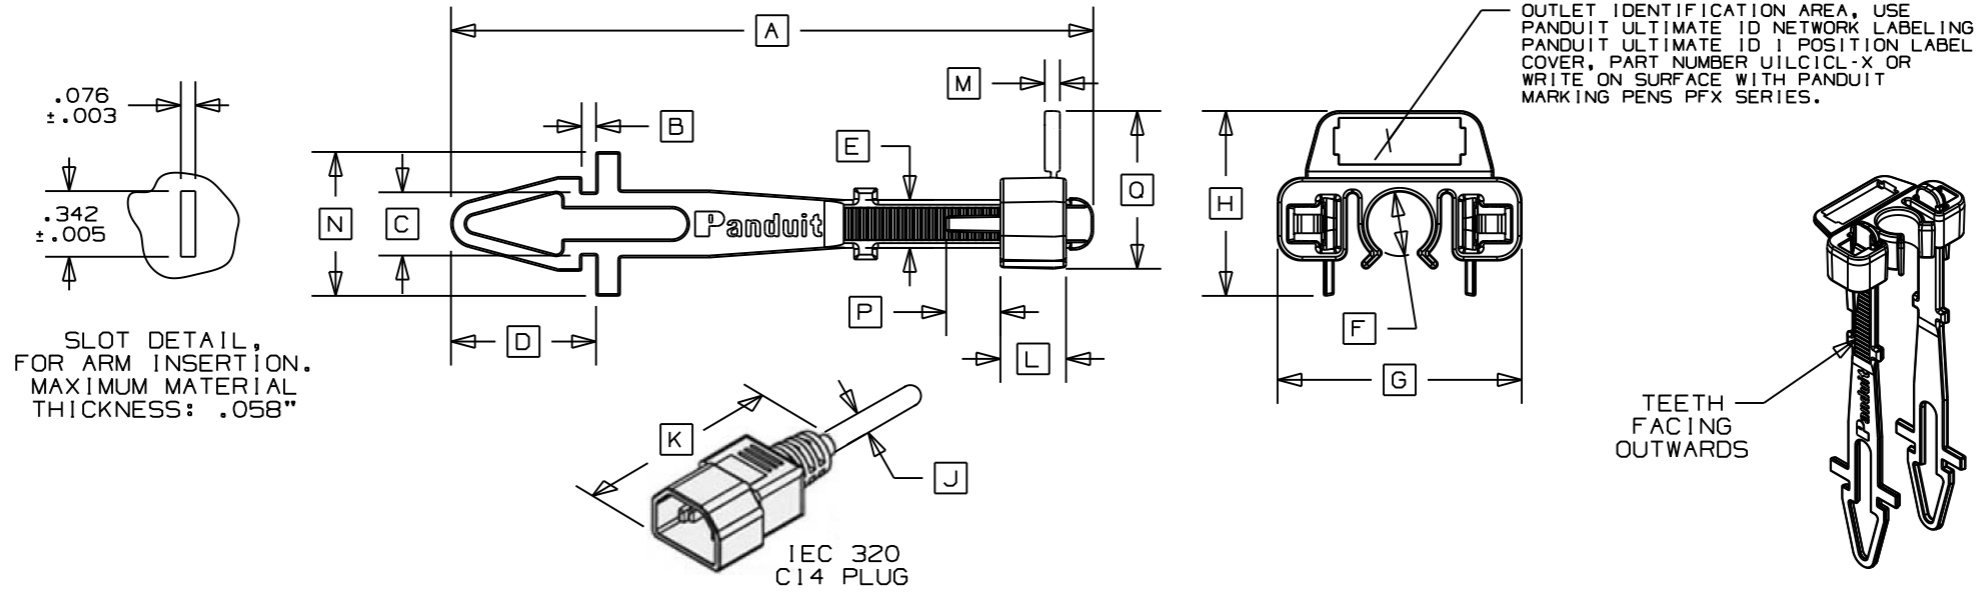

PANDUIT PART NO.	A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	G in (mm)	H in (mm)	J RECOMMENDED CABLE DIA. RANGE in (mm)	K RECOMMENDED PLUG HEIGHT in (mm)	L in (mm)	M in (mm)	N in (mm)	P in (mm)	Q in (mm)	MIN. TENSILE lbs (N)	APPROXIMATE WEIGHT lbs/100 pcs. (g)
PRPC13	3.33 (84.6)	.07 (1.8)	.33 (8.4)	.75 (19.1)	.26 (6.6)	.33 (8.4)	1.25 (31.8)	.98 (24.9)	.325-.360 (8.3-9.1)	1.80-2.28 (45.7-57.9)	.34 (8.6)	.10 (2.5)	.75 (19.1)	.28 (7.1)	.82 (20.8)	28 (126)	.83 (377)

- NOTES:
1. MATERIAL FLAMMABILITY RATING: UL94V-0 (LABEL COVER NOT UL94V-0 RATED)
  2. SEE [www.panduit.com](http://www.panduit.com) FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE AND PART COLOR.
  3. HALOGEN FREE
  4. PART IS RELEASABLE AND REUSABLE
  5. PRODUCT IS RoHS COMPLIANT.
  6. LABEL COVER UILCICL INCLUDED.

CAD FILENAME/LAYERS  
W15123AE/02 SS-27621

PANDUIT CORP. TINLEY PARK, ILLINOIS

POU PLUG RETENTION DEVICE

UNLESS OTHERWISE SPECIFIED,  
DIMENSIONAL TOLERANCES ARE:  
(.X) ± (.XXX) ± .010  
(.XX) ± .020 ANGLES ±

UNLESS OTHERWISE SPECIFIED,  
ALL DIMENSIONS ARE GIVEN  
IN INCHES, THIRD ANGLE PROJECTION.

2	6/17/09	BWG		ADDED NOT 6 AND RATING NOTE TO NOTE 1.	SS-27621	2											
1	6/10/09	BWG	TGS	DRAWING UPDATED FOR PRODUCT RELEASE	SS-27621	1	TGS										
R	2/5/09	ERW	TGS	DRAWING RELEASED	SS-27621	R	TGS										
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP									

DRAWN BY  
ERW  
DATE  
2/5/09  
CHK'D

MAT'L:  
FLAME RETARDANT  
NYLON 6.6

SCALE  
NONE  
DRAWING NO.  
SS-27621

DWG  
A  
SIZE