




Product designation


Signal tower Ø70mm/2.75" 8TL7FL - Light mudules

Product type designation


General characteristics		
Diameter	mm - inch 70 / 2.75	
Supply voltage (AC)	V	110120
Colour		White
IEC degree of protection		IP65
Light consumption per module (AC)	mA	20
Light consumption per module (DC)	mA	20
Sound module consumption (AC)	mA	20
Sound module consumption (DC)	mA	20
Mechanical features		
Weight	g	92
Ambient conditions		
Temperature		
Operating temperature		
	min °C	-20
	max °C	+50
Dimensions		







Wiring diagrams

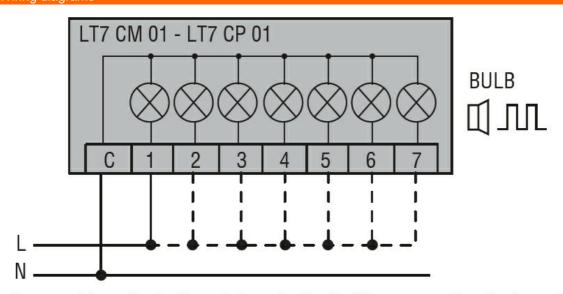

Connect terminals C and 1 as indicated to power the first module. If other modules are fitted, the respective terminals must be connected accordingly.

Certifications and compliance

Compliance

CSA C22.2 n° 14



ENERGY AND AUTOMATION

8LT7FLE8

FLASH MODULE. Ø70MM. WITH 4-JOULE XENON BULB, WHITE, 110...120VAC

	IEC/EN 60947-1
	IEC/EN 60947-5-1
	UL508
Certificates	
	cULus
	EAC
ETIMA I IN IN IN	

ETIM classification

ETIM 8.0

EC000232 -Optical module for signal tower